
FRONT LOADER WASHER HEAT PUMP DRYER **INSTALLATION CONSIDERATIONS**

Accessing your product specifications	3
Electrical connection	5

FISHER & PAYKEL

UK IE EU HK SG

FRONT LOADER WASHER, HEAT PUMP DRYER



WH1260MZB5, WH1260YZB5, DH9060MZB5, DH9060YZB5, DH9060YLZB5

ACCESSING YOUR PRODUCT SPECIFICATIONS



For full product, cabinetry and service specifications, refer to the Planning Guide. To access the Planning Guide, scan the QR code or visit fisherpaykel.com/specify. Search by appliance type, product name or model code.

FRONT LOADER WASHER MODELS: WH1260MZB5, WH1260YZB5

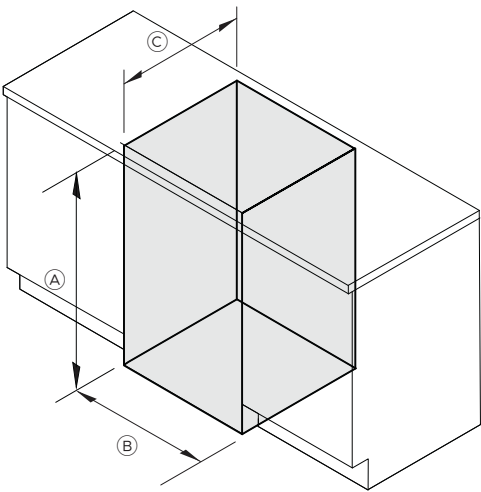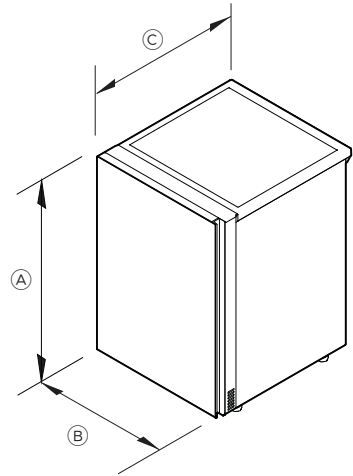

PRODUCT DIMENSIONS	MM
A Overall height	850
B Overall width	602
C Overall depth*	676

*Includes door when closed



CAVITY DIMENSIONS	MM
A Minimum inside height of cavity	870
B Minimum inside width of cavity	635
C Minimum inside depth of cavity	706

ACCESSING YOUR PRODUCT SPECIFICATIONS



For full product, cabinetry and service specifications, refer to the Planning Guide. To access the Planning Guide, scan the QR code or visit fisherpaykel.com/specify. Search by appliance type, product name or model code.

HEAT PUMP DRYER MODELS: DH9060MZB5, DH9060YZB5, DH9060YLZB5

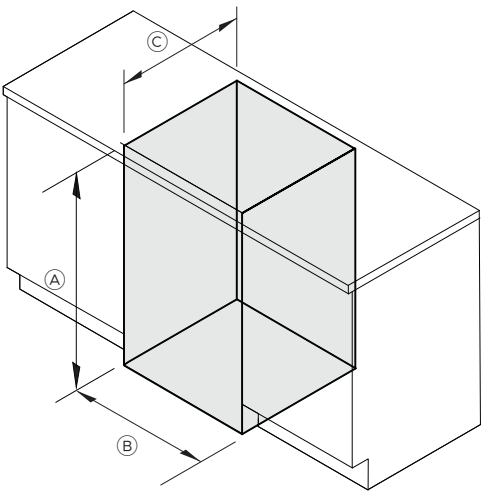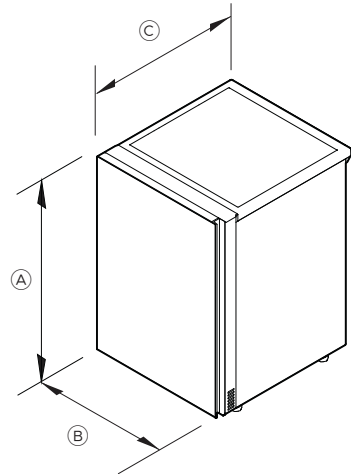

PRODUCT DIMENSIONS	MM
(A) Overall height	850
(B) Overall width	602
(C) Overall depth*	695

*Includes door when closed

CAVITY DIMENSIONS	MM
(A) Minimum inside height of cavity	870
(B) Minimum inside width of cavity	635
(C) Minimum inside depth of cavity	725

ELECTRICAL CONNECTION

SPECIFICATIONS	ALL MODELS
SERVICE (A)	10
SUPPLY	220-240 VAC, 50Hz
VOLTAGE (V)	230V

