FISHER & PAYKEL

FRONT LOADER WASHING MACHINE & DRYER PAIRING GUIDE

INSTALLATION GUIDE

SIDE BY SIDE INSTALL – PAIRING MATRIX

		DRYERS									
	MODELS	DE8060P2	DE8060P3	DH8060P1	DH8060P3	DH9060P1	DH9060P2	DH9060PG2	DH9060C1	DH9060FS1	DH9060FSG1
WASHERS	WH1260F*					•	•		•	•	
	WH1160F2					•	•		•	•	
	WH1160FG2							•			•
	WH1060S1					•	•		•	•	
	WH1160S1					•	•		•	•	
	WH1060SG1							•			•
	WH1160P3					•	•		•	•	
	WH1060P1					•	•		•	•	
	WH1260P1					•	•		•	•	
	WH7560P2	•		•							
	WH7560J3	•		•							
	WH8060J3	•		•							
	WH8560F1	•		•							
	WH8060P2	•		•							
	WH8560P2	•		•							
	WH9060J3	•		•							
	WH8560J3	•		•							
	WH8060P1	•		•							
	WH9060P3		•		•						
	WH1060P3		•		•						
	WH8560P3		•		•						
	WH8060P3		•		•						

Perfect Pair – Recommended pairing. Designed to compliment each other visually and mirror performance quality.

Matched Pair – Designed to compliment each other visually.

Compatible: Products are compatible overall, have subtle differences in visual and user experience

STACKED INSTALL – PAIRING MATRIX

		DRYERS									
	MODELS	DE8060P2	DE8060P3	DH8060P1	DH8060P3	DH9060P1	DH9060P2	DH9060PG2	DH9060C1	DH9060FS1	DH9060FSG1
		STACKING KIT 428122				STACKING KIT 428159		STACKING KIT 99373	STACKING KIT 428159		STACKING KIT 99373
WASHER	WH1260F*					•	•		•	•	
	WH1160F2					•	•		•	•	
	WH1160FG2							•			•
	WH1060S1					•	•		•	•	
	WH1160S1					•	•		•	•	
	WH1060SG1							•			•
	WH1160P3					•	•		•	•	
	WH1060P1					•	•		•	•	
	WH1260P1					•	•		•	•	
	WH7560P2	•		•		X	X	X	X	X	X
	WH7560J3	•		•		X	X	X	X	X	X
	WH8060J3	•		•		X	X	X	X	X	X
	WH8560F1	•		•							
	WH8060P2	•		•							
	WH8560P2	•		•							
	WH9060J3	•		•							
	WH8560J3	•		•							
	WH8060P1	•		•							
	WH9060P3		•		•						
	WH1060P3		•		•						
	WH8560P3		•		•						
	WH8060P3		•		•						

Perfect Pair – Recommended pairing. Designed to compliment each other visually and mirror performance quality.

Matched Pair – Designed to compliment each other visually.

Not suitable for stacked install - Potential safety risk

Compatible: Products are compatible overall, have subtle differences in visual and user experience

SIDE BY SIDE INSTALL – CLEARANCE & CAVITY DIMENSIONS

Front Loading Washer
WH1260, WH1160, WH1060P1, WH1060S

Heat Pump or Condensing Dryer
DH9060, DE8060, DH8060

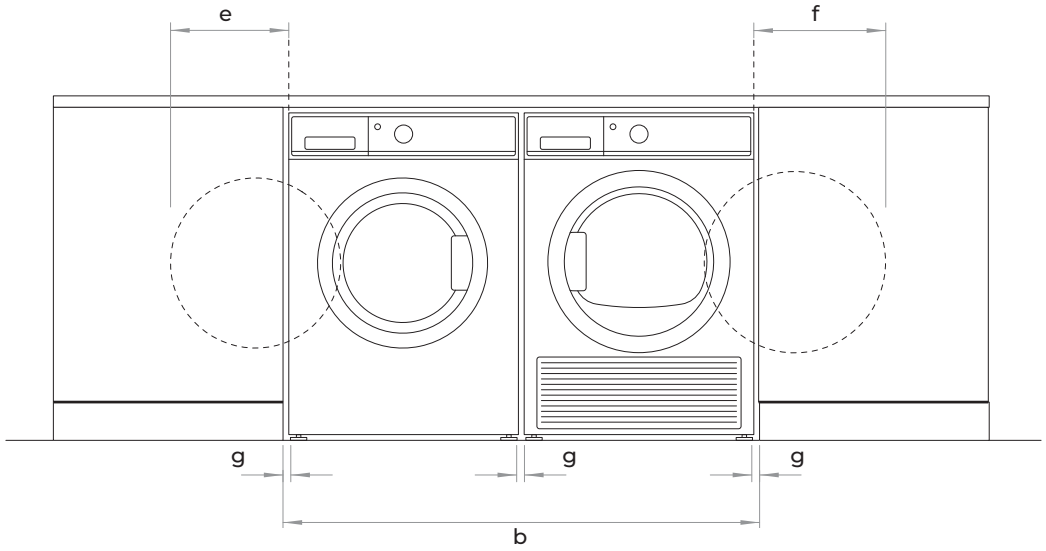

FRONT

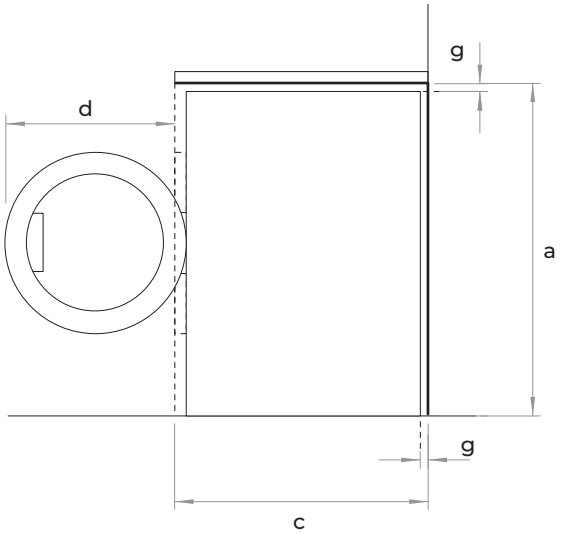

PROFILE WASHER

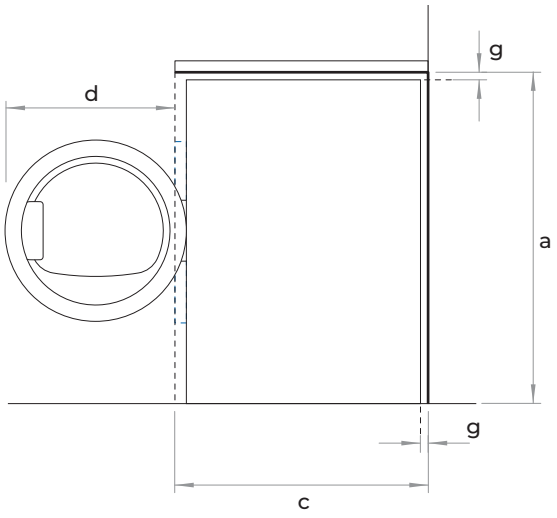

PROFILE DRYER

1 Front panel of the product

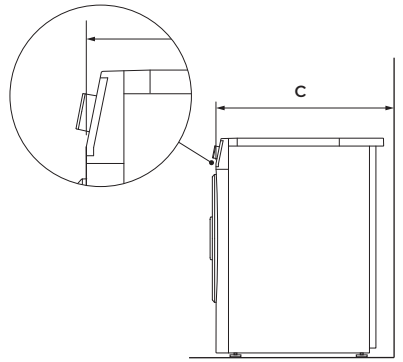

CAVITY DIMENSIONS	MM
A Minimum cavity height	870
B Minimum cavity width	1260
C Minimum cavity depth	
• Flush with front panel of the product1	655
• In cupboard	715

CLEARANCE DIMENSIONS	MM
D Depth of door (widest opening, deepest product)	450
E Minimum washer door clearance to adjacent wall	355
F Minimum dryer door clearance to adjacent wall	335
G Minimum gap clearance to adjacent product or cabinetry2	20

2 Applies to sides, top, rear and between products

SIDE BY SIDE INSTALL – PLUMBING & ELECTRICIAL

Front Loading Washer
WH1260, WH1160, WH1060P1, WH1060S

Heat Pump or Condensing Dryer
DH9060, DE8060, DH8060

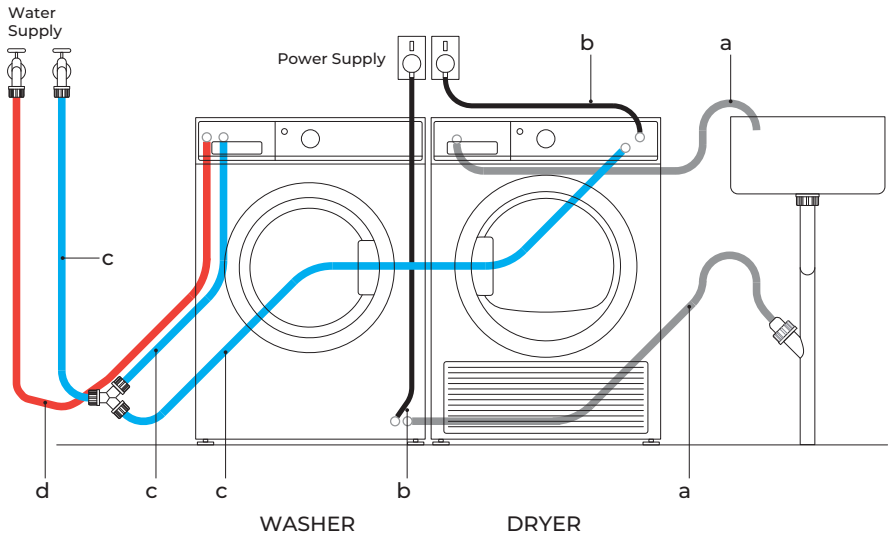

SERVICE DIMENSION	WASHER	DRYER
	MM	MM
A Length of drain hoses	1600	1300
B Length of power cord	2000	1500
C Length of cold water inlet hose1	1500	650*
D Length of hot water inlet hose	1500	n/a

1 Dryer cold water inlet hose is only present on DH9060FS model dryers
* Cold water inlet hoses can be interchanged between washer and dryer

SPECIFICATIONS

ELECTRICAL	
Supply	220 – 240 V, 50 Hz
Service	10 amp circuit

PLUMBING	
Pressure	max 1 MPa (150psi) min 30 kPa (4.5psi) min 50 kPa (7.3psi)1
Flow rate at tap	min. 6 litres/minute
Cold water temp	max 35°C
Hot water temp	max 65°C

Hot water inlet may not be an option for your washer model, refer to your washer installation guide.
1 WH1260F, WH1160F, WH1160S, WH1060S

WASHER DRAINAGE HEIGHTS

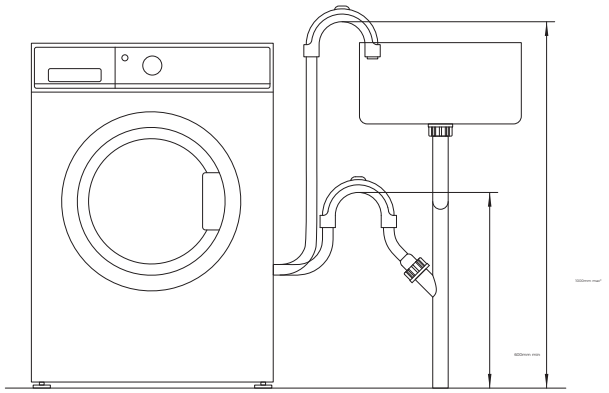

* Recommended standpipe height is 800mm

SIDE BY SIDE INSTALL – CLEARANCE & CAVITY DIMENSIONS

Front Loading Washer
WH8060J, WH7560

Heat Pump or Condensing Dryer
DH9060, DE8060, DH8060

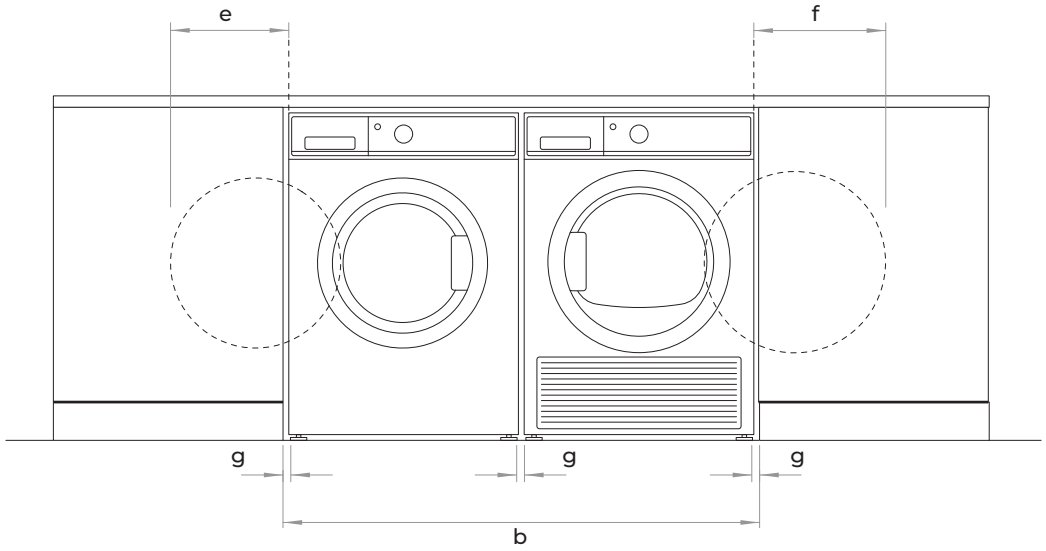

FRONT

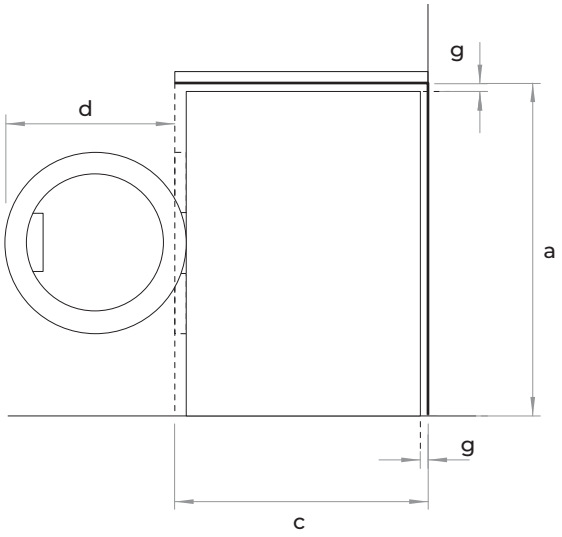

PROFILE WASHER

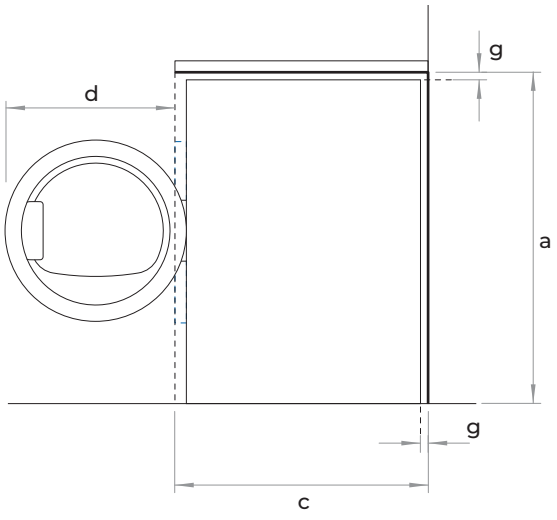

PROFILE DRYER

1 Front panel of the product

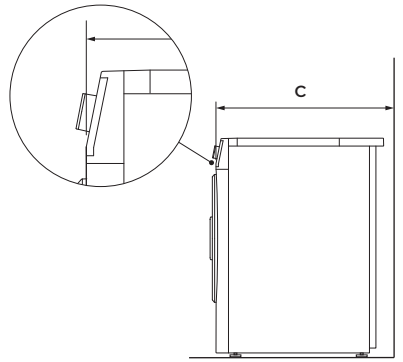

CAVITY DIMENSIONS	MM
A Minimum cavity height	870
B Minimum cavity width	1260
C Minimum cavity depth	
• Flush with front panel of the product1	640
• In cupboard	705

CLEARANCE DIMENSIONS	MM
D Depth of door (widest opening, deepest product)	450
E Minimum washer door clearance to adjacent wall	355
F Minimum dryer door clearance to adjacent wall	335
G Minimum gap clearance to adjacent product or cabinetry2	20

2 Applies to sides, top, rear and between products

SIDE BY SIDE INSTALL – PLUMBING & ELECTRICIAL

Front Loading Washer
WH8060J, WH7560

Heat Pump or Condensing Dryer
DH9060, DE8060, DH8060

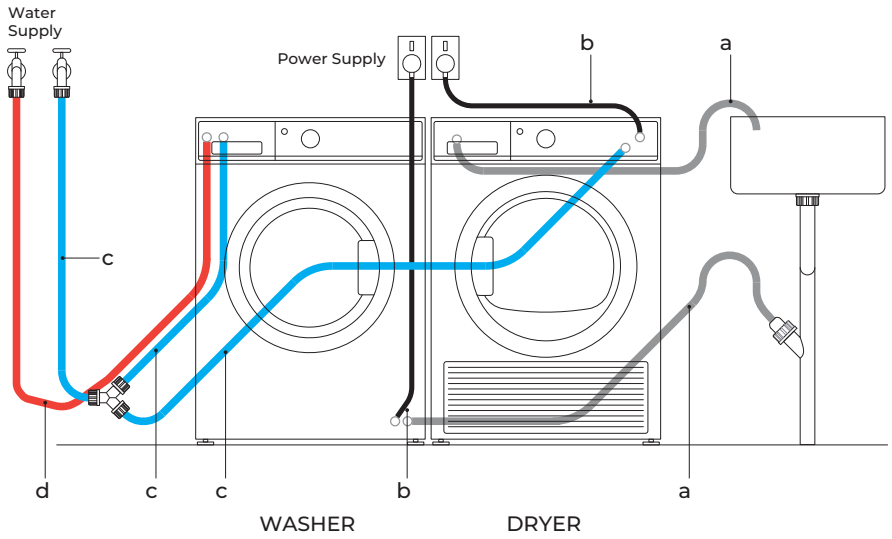

SERVICE DIMENSION		WASHER	DRYER
		MM	MM
A	Length of drain hoses	1600	1300
B	Length of power cord	1500	1500
C	Length of cold water inlet hose1	1500	650*
D	Length of hot water inlet hose2	1500	n/a

1 Only present for DH9060FS model dryers
2 Only present for WH7560P2 model washers
* Cold water inlet hoses can be interchanged between washer and dryer

SPECIFICATIONS

ELECTRICAL	
Supply	220 – 240 V, 50 Hz
Service	10 amp circuit

PLUMBING	
Pressure	max 1 MPa (150psi) min 30 kPa (4.5psi)
Flow rate at tap	min. 6 litres/minute
Cold water temp	max 35°C
Hot water temp	max 65°C

Hot water inlet may not be an option for your washer model, refer to your washer installation guide.

WASHER DRAINAGE HEIGHTS

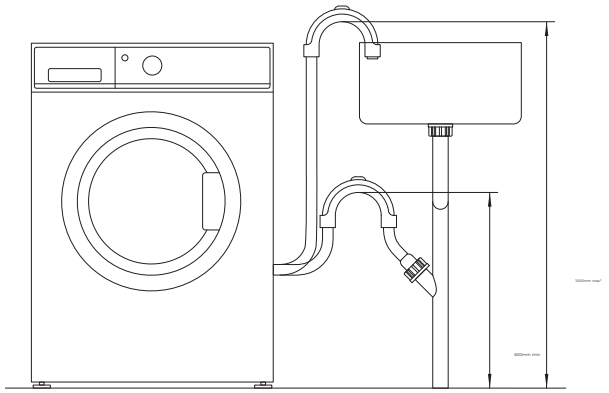

* Recommended standpipe height is 800mm

SIDE BY SIDE INSTALL – CLEARANCE & CAVITY DIMENSIONS

Front Loading Washer
WH1060P3, WH9060, WH8560
WH8060P

Heat Pump or Condensing Dryer
DH9060, DE8060, DH8060

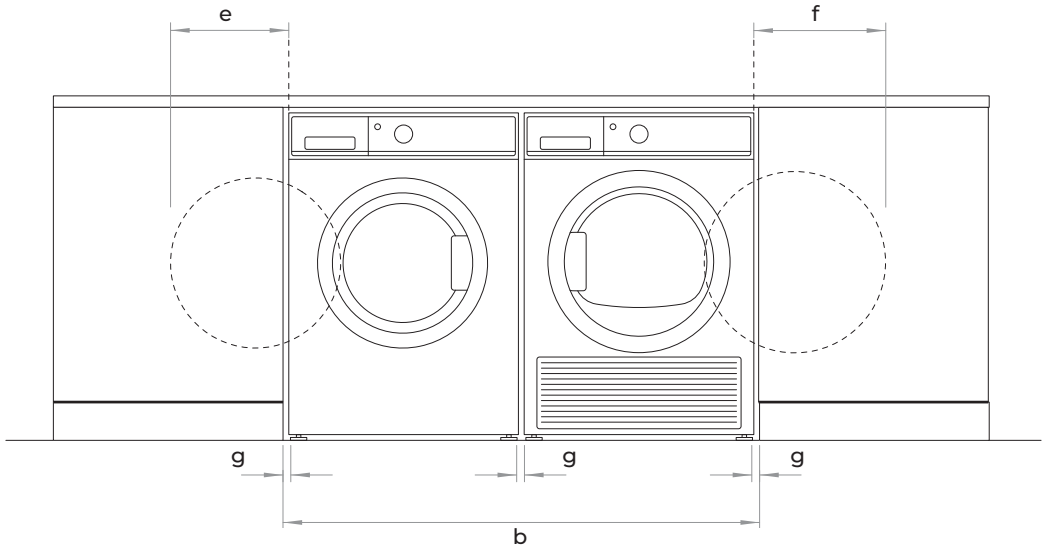

FRONT

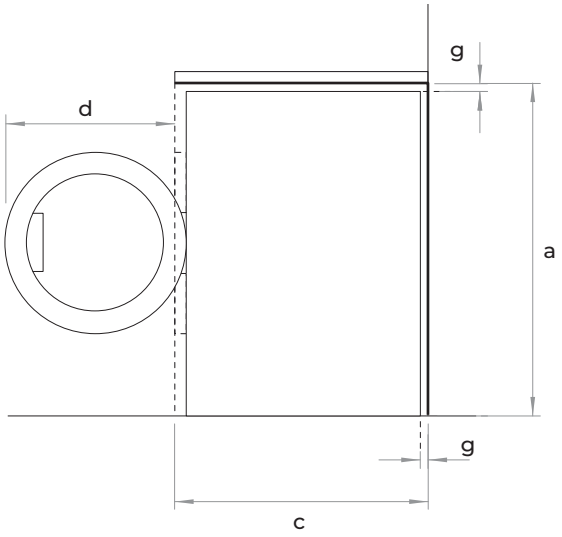

PROFILE WASHER

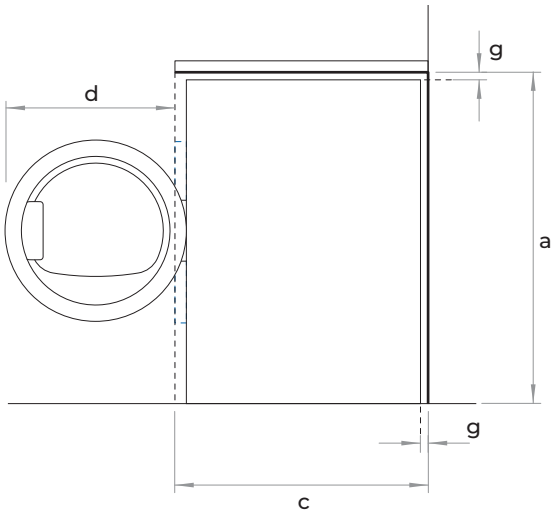

PROFILE DRYER

1 Front panel of the product

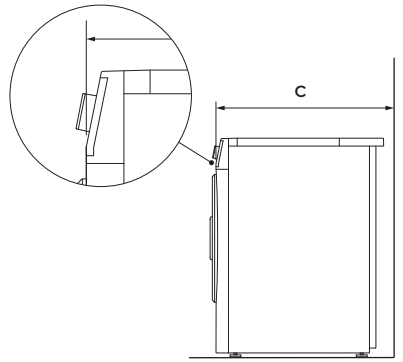

CAVITY DIMENSIONS	MM
A Minimum cavity height	870
B Minimum cavity width	1260
C Minimum cavity depth	
• Flush with front panel of the product1	650
• In cupboard	705

CLEARANCE DIMENSIONS	MM
D Depth of door (widest opening, deepest product)	450
E Minimum washer door clearance to adjacent wall	355
F Minimum dryer door clearance to adjacent wall	335
G Minimum gap clearance to adjacent product or cabinetry2	20

2 Applies to sides, top, rear and between products

SIDE BY SIDE INSTALL – PLUMBING & ELECTRICIAL

Front Loading Washer
WH1060P3, WH9060, WH8560
WH8060P

Heat Pump or Condensing Dryer
DH9060, DE8060, DH8060

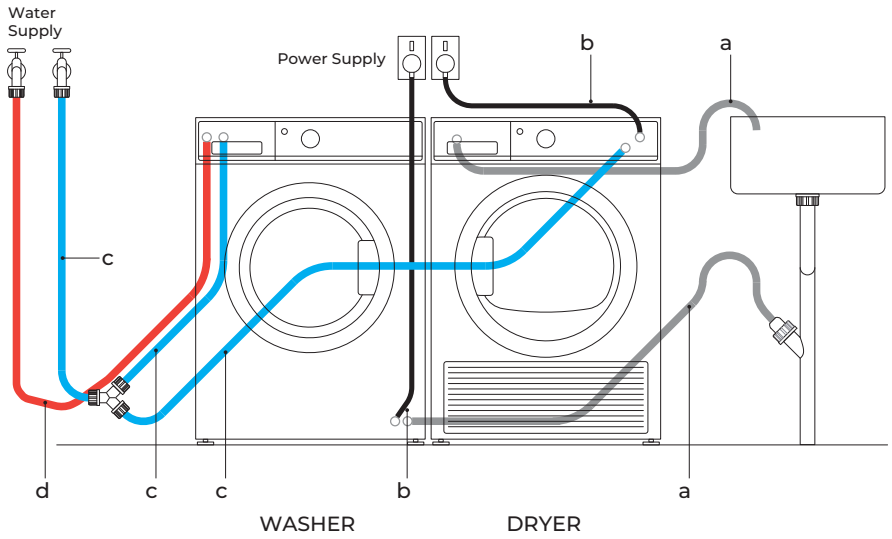

SERVICE DIMENSION	WASHER	DRYER
	MM	MM
A Length of drain hoses	1500	1300
B Length of power cord	1500	1500
C Length of cold water inlet hose1	1500	650*
D Length of hot water inlet hose2	1500	n/a

1 Only present for DH9060FS model dryers
2 Only present for WH8060
* Cold water inlet hoses can be interchanged between washer and dryer

SPECIFICATIONS

ELECTRICAL	
Supply	220 – 240 V, 50 Hz
Service	10 amp circuit

PLUMBING	
Pressure	max 1 MPa (150psi) min 30 kPa (4.5psi)
Flow rate at tap	Min. 6 litres/minute
Cold water temp	max 35°C
Hot water temp	max 65°C

Hot water inlet may not be an option for your washer model, refer to your washer installation guide.

WASHER DRAINAGE HEIGHTS

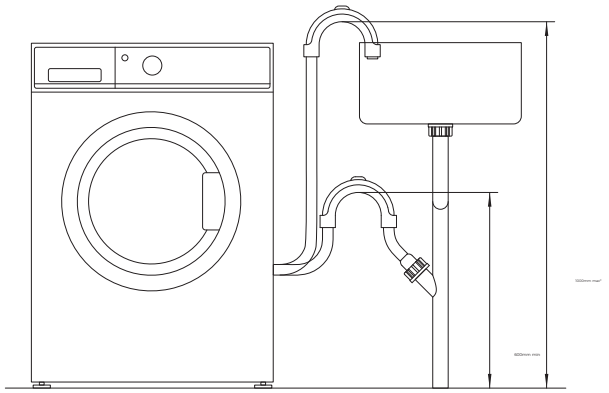

* Recommended standpipe height is 800mm

STACKED INSTALL – CLEARANCE & CAVITY DIMENSIONS

Front Loading Washer
WH1260, WH1160,
WH1060P1, WH1060S

Heat Pump Dryer
DH9060

Stacking kit
428159 (white)
& 99373 (graphite)

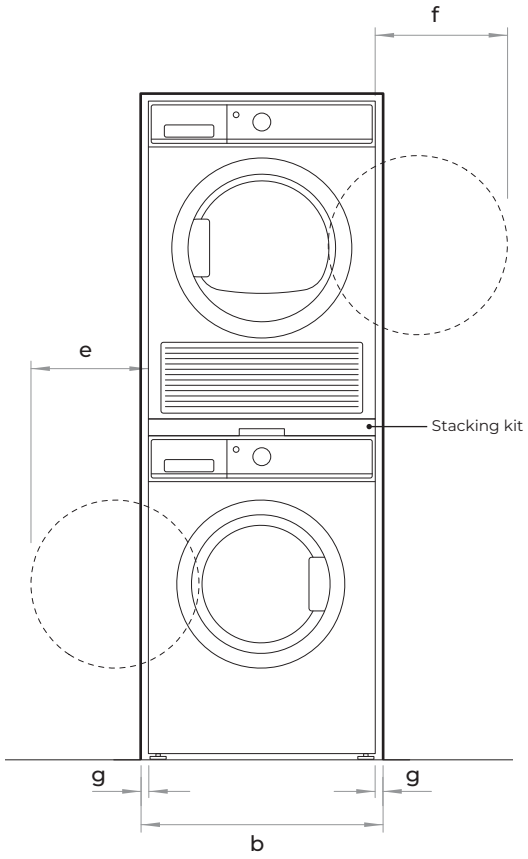

FRONT

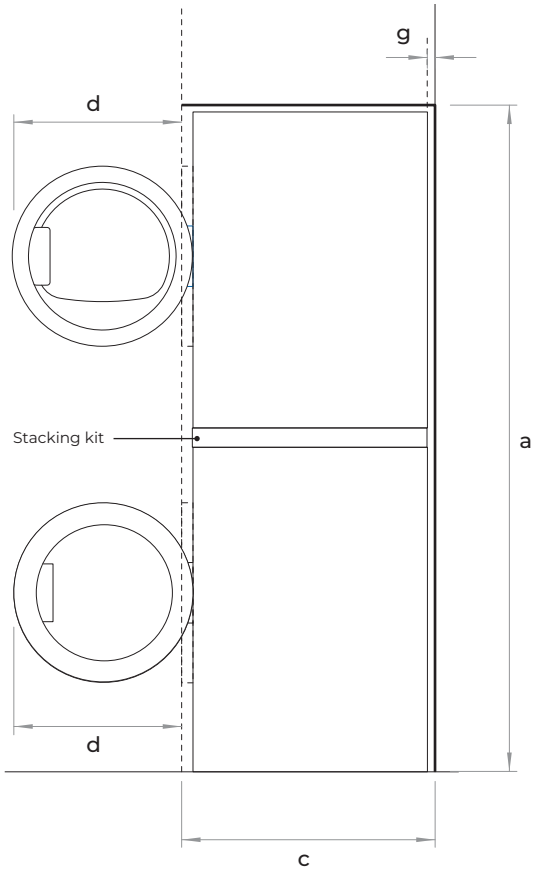

PROFILE

1 Front panel of the product

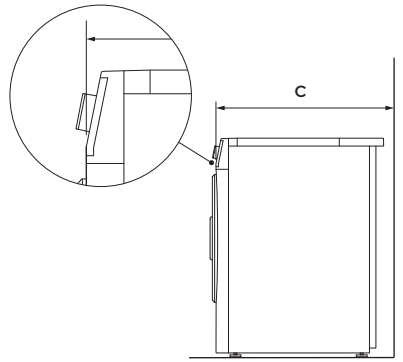

CAVITY DIMENSIONS	MM
A Minimum cavity height	1750
B Minimum cavity width	640
C Minimum cavity depth	
• Flush with front panel of the product1	655
• In cupboard	715

CLEARANCE DIMENSIONS	MM
D Depth of door (widest opening, deepest product)	450
E Minimum washer door clearance to adjacent wall	355
F Minimum dryer door clearance to adjacent wall	335
G Minimum gap clearance to adjacent product or cabinetry2	20

2 Applies to sides, top, rear and between products

STACKED INSTALL – PLUMBING & ELECTRICIAL

Front Loading Washer
WH1260, WH1160,
WH1060P1, WH1060S

Heat Pump Dryer
DH9060

Stacking kit
428159 (white)
& 99373 (graphite)

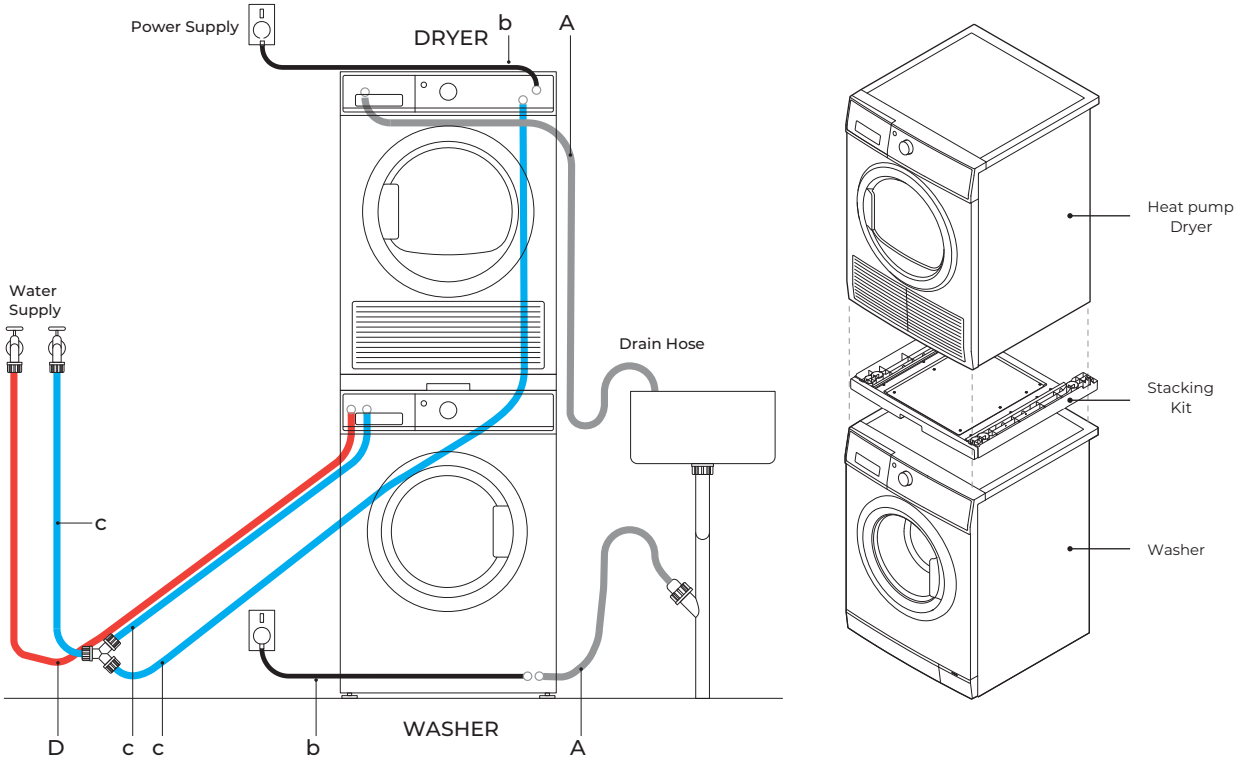

SERVICE DIMENSION	WASHER	DRYER
	MM	MM
A Length of drain hoses	1600	1300
B Length of power cord	2000	1500
C Length of cold water inlet hose1	1500	650*
D Length of hot water inlet hose	1500	n/a

1 Only present for DH9060FS model dryers
* Cold water inlet hoses can be interchanged between washer and dryer

SPECIFICATIONS

ELECTRICAL	
Supply	220 – 240 V, 50 Hz
Service	10 amp circuit

PLUMBING	
Pressure	max 1 MPa (150psi) min 30 kPa (4.5psi) min 50 kPa (7.3psi)1
Flow rate at tap	min. 6 litres/minute
Cold water temp	max 35°C
Hot water temp	max 65°C

Hot water inlet may not be an option for your washer model, refer to your washer installation guide.
1 WH1260F, WH1160F, WH1160S, WH1060S

WASHER DRAINAGE HEIGHTS

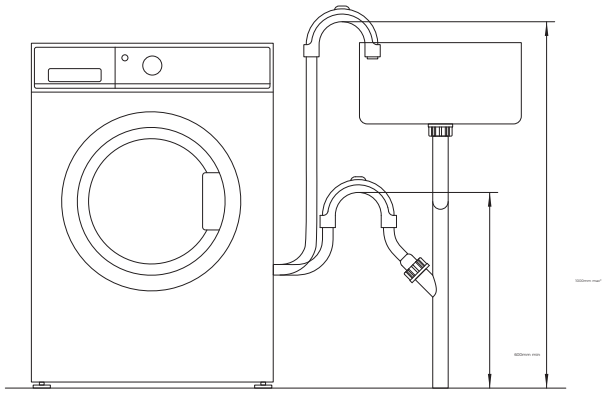

* Recommended standpipe height is 800mm

STACKED INSTALL – CLEARANCE & CAVITY DIMENSIONS

Front Loading Washer	**Heat pump Dryer**	Stacking kit
WH8060J, WH7560	DE8060, DH8060P	428122

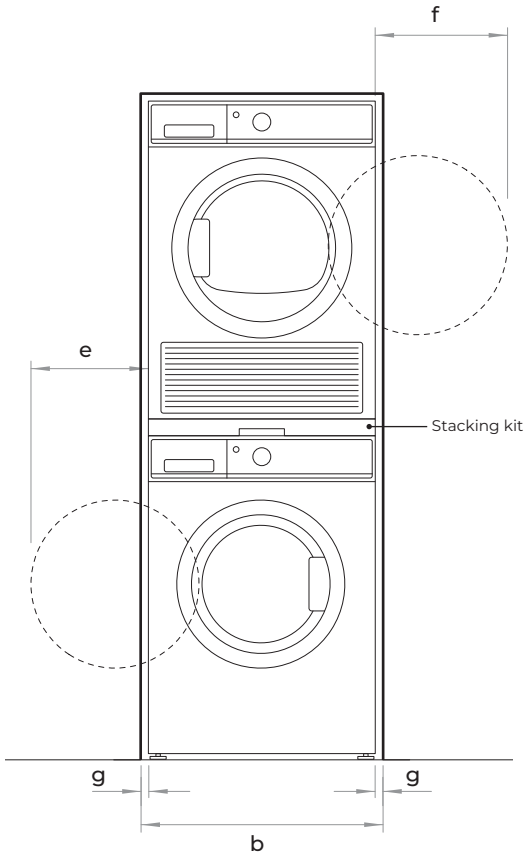

FRONT

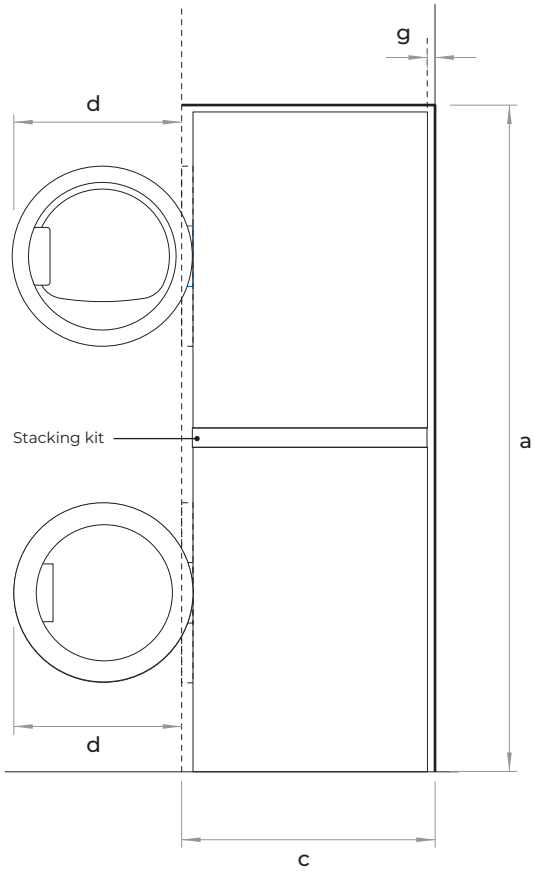

PROFILE

1 Front panel of the product

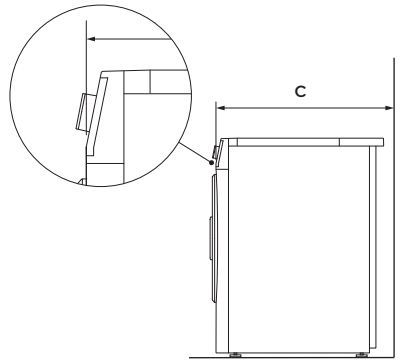

CAVITY DIMENSIONS	**MM**
A Minimum cavity height	1750
B Minimum cavity width	640
C Minimum cavity depth	
• Flush with front panel of the product1	635
• In cupboard	685

CLEARANCE DIMENSIONS	**MM**
D Depth of door (widest opening, deepest product)	450
E Minimum washer door clearance to adjacent wall	355
F Minimum dryer door clearance to adjacent wall	335
G Minimum gap clearance to adjacent product or cabinetry2	20

2 Applies to sides, top, rear and between products

STACKED INSTALL – PLUMBING & ELECTRICIAL

Front Loading Washer
WH8060J, WH7560

Heat pump Dryer
DE8060, DH8060P

Stacking kit
428122

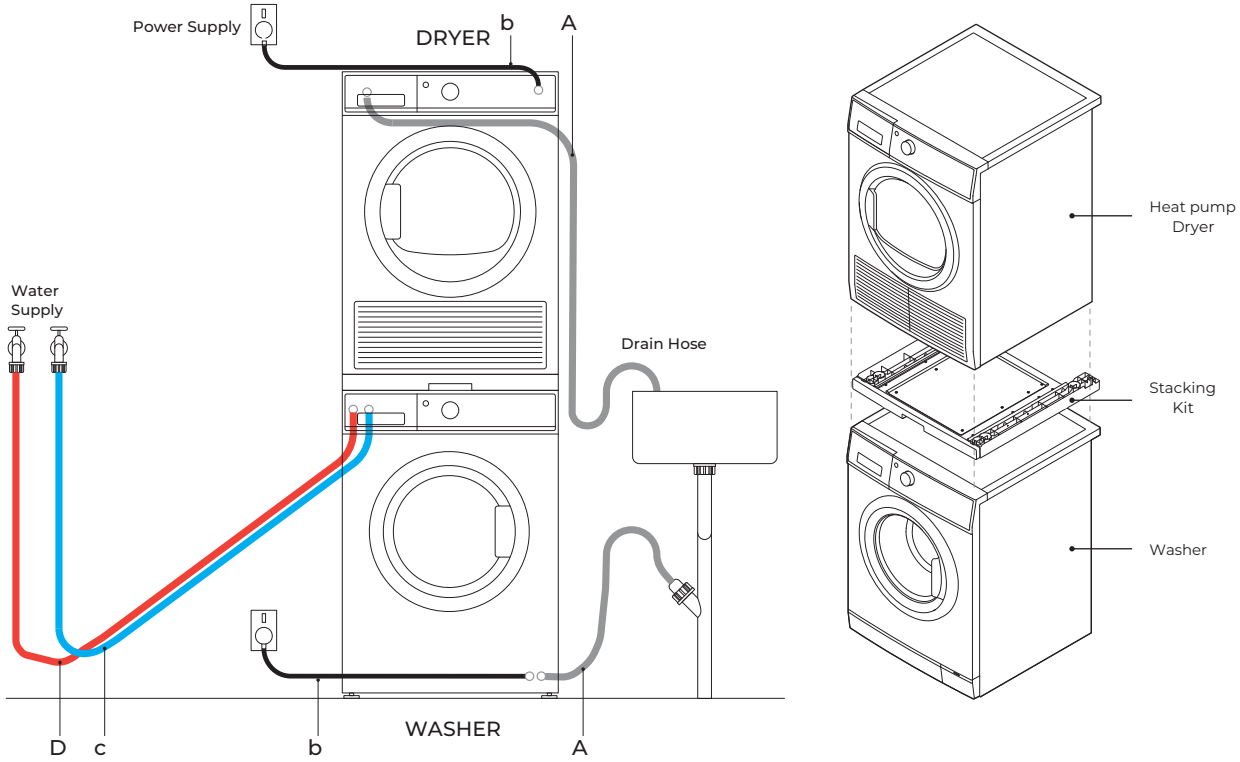

SERVICE DIMENSION	WASHER	DRYER
	MM	MM
A Length of drain hoses	1600	1300
B Length of power cord	1500	1500
C Length of cold water inlet hose1	1500	n/a
D Length of hot water inlet hose2	1500	n/a

1 Only present for DH9060FS model dryers
2 Only present for WH7560P2 model washers

SPECIFICATIONS

ELECTRICAL	
Supply	220 – 240 V, 50 Hz
Service	10 amp circuit

PLUMBING	
Pressure	max 1 MPa (150psi) min 30 kPa (4.5psi)
Flow rate at tap	min. 6 litres/minute
Cold water temp	max 35°C
Hot water temp	max 65°C

WASHER DRAINAGE HEIGHTS

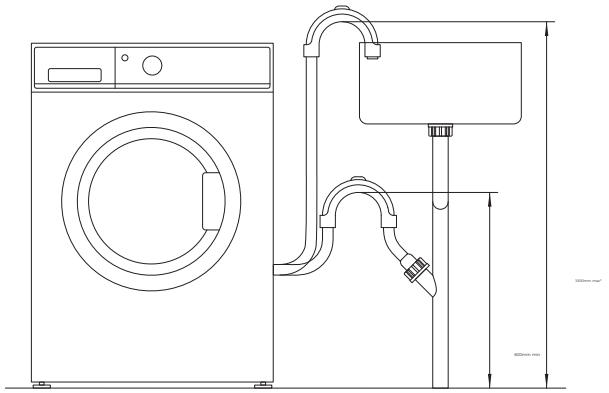

* Recommended standpipe height is 800mm

STACKED INSTALL – CLEARANCE & CAVITY DIMENSIONS

Front Loading Washer
WH1060P3, WH9060
WH8560, WH8060P

Heat Pump or Condensing Dryer
DE8060, DH8060P

Stacking kit
428122

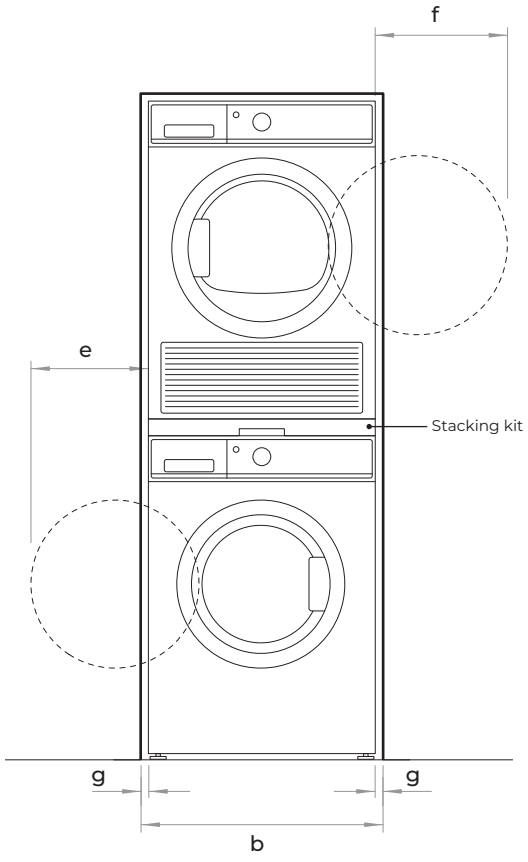

FRONT

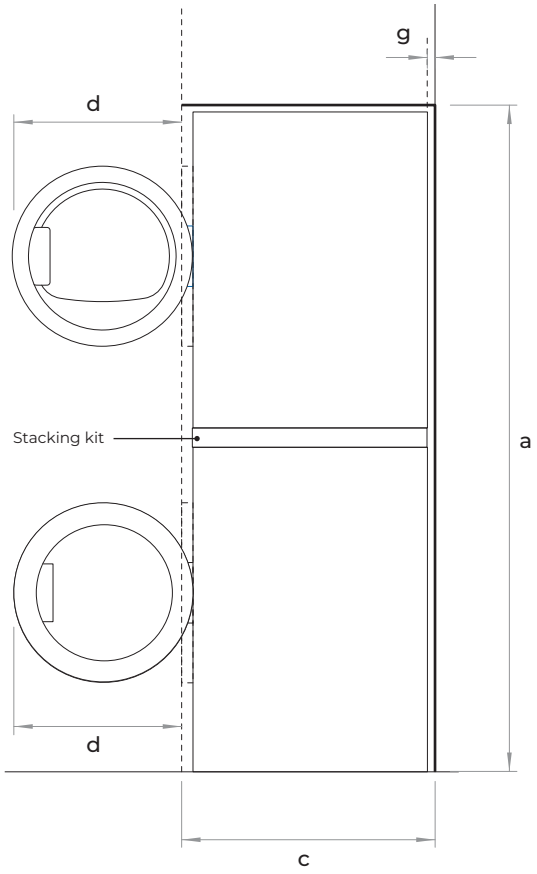

PROFILE

1 Front panel of the product

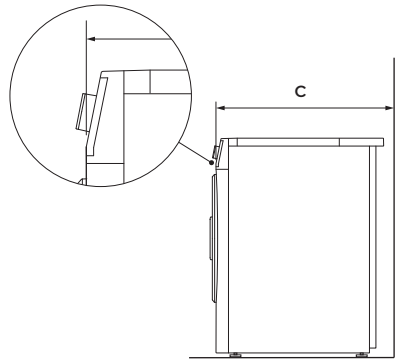

CAVITY DIMENSIONS	MM
A Minimum cavity height	1750
B Minimum cavity width	640
C Minimum cavity depth	
• Flush with front panel of the product1	650
• In cupboard	695

CLEARANCE DIMENSIONS	MM
D Depth of door (widest opening, deepest product)	450
E Minimum washer door clearance to adjacent wall	355
F Minimum dryer door clearance to adjacent wall	335
G Minimum gap clearance to adjacent product or cabinetry2	20

2 Applies to sides, top, rear and between products

STACKED INSTALL – PLUMBING & ELECTRICIAL

Front Loading Washer
WH1060P3, WH9060
WH8560, WH8060P

Heat Pump or Condensing Dryer
DE8060, DH8060P

Stacking kit
428122

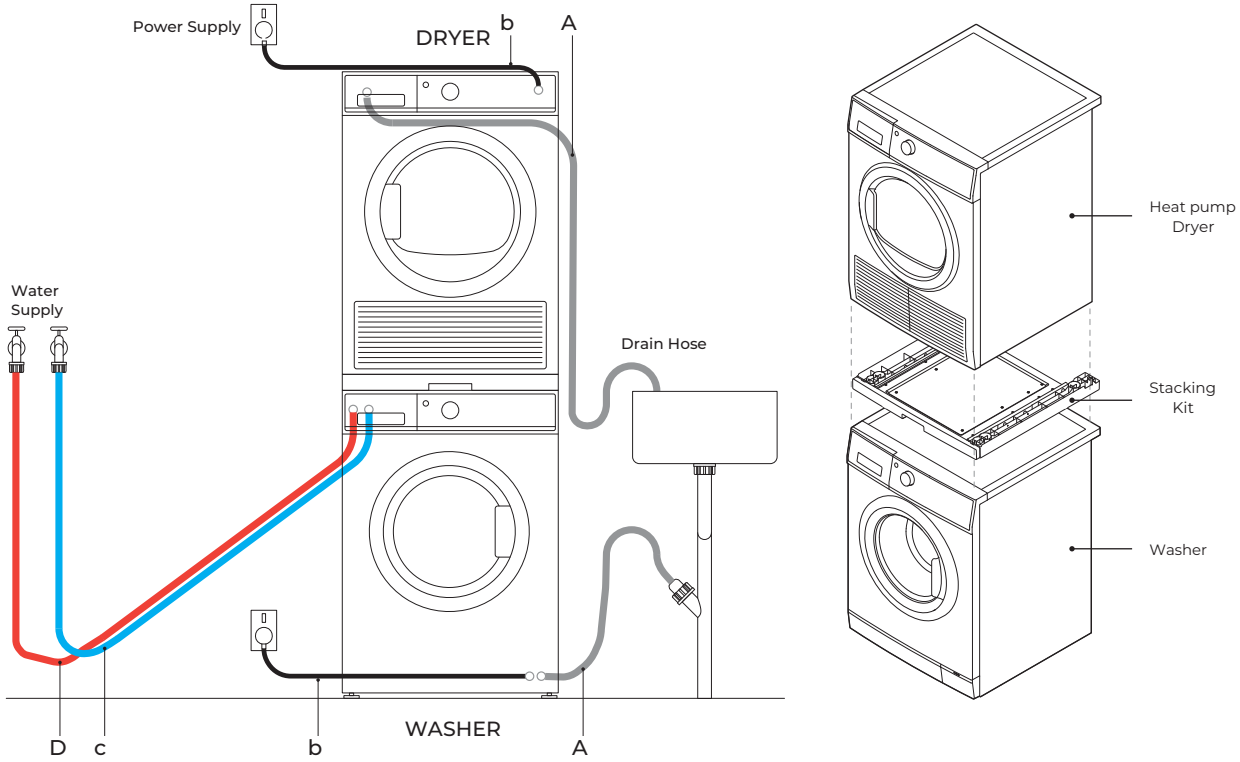

SERVICE DIMENSION	WASHER	DRYER
	MM	MM
A Length of drain hoses	1500	1300
B Length of power cord	1500	1500
C Length of cold water inlet hose1	1500	n/a
D Length of hot water inlet hose2	1500	n/a

1 Only present for DH9060FS model dryers
2 Some models of washer only

SPECIFICATIONS

ELECTRICAL	
Supply	220 -240 V, 50 Hz
Service	10 amp circuit

PLUMBING	
Pressure	max 1 MPa (150psi) min 30 kPa (4.5psi)
Flow rate at tap	min. 6 litres/minute
Cold water temp	max 35°C
Hot water temp	max 65°C

WASHER DRAINAGE HEIGHTS

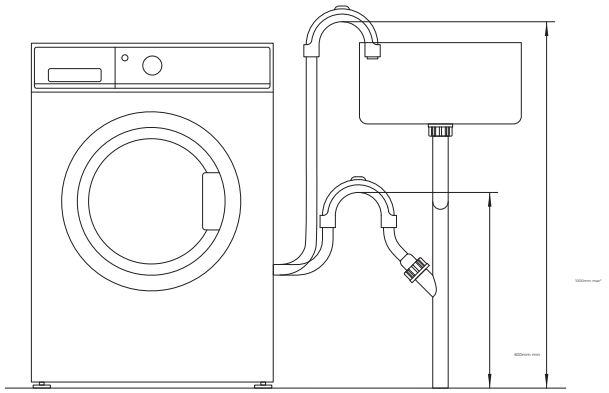

* Recommended standpipe height is 800mm

FISHERPAYKEL.COM

© Fisher & Paykel Appliances 2022. All rights reserved.

The models shown in this guide may not be available in all markets and are subject to change at any time.

The product specifications in this guide apply to the specific products and models described at the date of issue. Under our policy of continuous product improvement, these specifications may change at any time.

For current details about model and specification availability in your country, please go to our website or contact your local Fisher & Paykel dealer.