

INTEGRATED TALL SINGLE DISHDRAWER™

PLANNING GUIDE

SERIES 11 | DD24STX6I1 | DD24STX6HI1

INTRODUCTION

This comprehensive planning guide provides you with the framework and tools to achieve your desired design outcome with Fisher & Paykel appliances. In this guide, you will find a range of conceptual, detailed, and dimensional product information to bring your ideas to life and create spaces that truly reflect your vision.

SUPPORT

For additional design planning and installation support please contact the Fisher & Paykel design support team.
designsupport@fisherpaykel.com

NOTES


The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Refer to our website fisherpaykel.com for the latest document version. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Specific installation guidance will be available with the product on delivery and on our website.

CONTENTS

CONCEPT DESIGN	PAGE	DEVELOPED AND DETAILED DESIGN	PAGE	DEVELOPED AND DETAILED DESIGN	PAGE
Design choices	3	Data sheets	7	Custom door panel preparation	20
Single drawer	4	Dishwasher with custom door panel	8	Custom panel preparation	21
		Dishwasher with stainless steel door panel	9		
Specification guide	5	Dishwasher with recessed handle door panel	10	Venting specifications	22
DD24STX6I1, DD24STX6HI1	6			Ventilation cabinet options	23
		Accessories	11	Duct placement	24
		Handles	12		
		Stainless steel panels	13	Services	25
				Service placement options	26
		Planning considerations	14	Service specifications	27
		Cavity specifications	15	Electrical and plumbing specifications	28
		Over width cavity specifications	16		
		Custom panel specifications	17	Data sheets: Handles	29
		Dual installation	18	Contemporary square fine handle	30
		Cooldrawer™ and dishwasher side by side	19	Contemporary round handle	31
				Classic round handle	32
				Professional round flush handle	33

DESIGN CHOICES

SINGLE DRAWER INTEGRATED

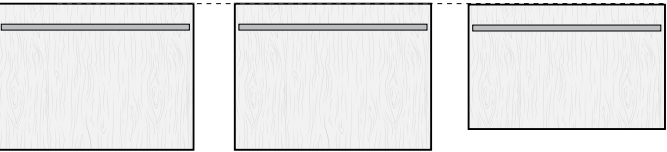


① Integrated Single DishDrawer™ Tall Series 11

② Integrated Single DishDrawer™ Tall Series 9

③ Integrated Single DishDrawer™ Series 9

SINGLE DRAWER PRE-FINISHED

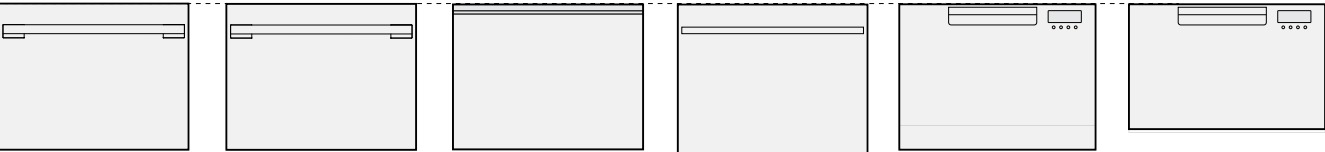

④ Professional Single DishDrawer™ Tall Series 11

⑤ Professional Single DishDrawer™ Tall Series 9

⑥ Contemporary Single DishDrawer™ Tall Series 9

⑦ Contemporary Single DishDrawer™ Tall Series 9

⑧ Contemporary Single DishDrawer™ Tall Series 7

⑨ Contemporary Single DishDrawer™ Series 7

STYLE				MODELS	PANEL OPTIONS	HANDLE STYLE	HEIGHT		WIDTH		DEPTH	
							in	mm	in	mm	in	mm
①	Integrated Single DishDrawer™	Tall	Series 11	DD24STX6I1 DD24STX6HI1	Custom panel, Brushed Stainless Steel, Recessed Handle in Brushed Stainless Steel or Black Stainless Steel	Contemporary, Professional and Classic	17 7/8	455	23 9/16	599	21 3/4	553
②	Integrated Single DishDrawer™	Tall	Series 9	DD24STI9 N DD24SHTI9 N	Custom panel, Brushed Stainless Steel, Recessed Handle in Brushed Stainless Steel or Black Stainless Steel	Contemporary, Professional and Classic	17 7/8	455	23 9/16	599	21 3/4	553
③	Integrated Single DishDrawer™		Series 9	DD24SI9 N	Custom panel, Brushed Stainless Steel	Contemporary, Professional and Classic	16 1/8	410	23 9/16	599	21 3/4	553
④	Professional Single DishDrawer™	Tall	Series 11	DD24STX6PX1	Stainless Steel	Professional stainless steel handle, internal control panel	17 7/8	454	23 9/16	599	22 9/16*	573*
⑤	Professional Single DishDrawer™	Tall	Series 9	DD24SV2T9 N	Stainless Steel	Professional stainless steel handle internal control panel	17 7/8	454	23 9/16	599	22 9/16*	573*
⑥	Contemporary Single DishDrawer™	Tall	Series 9	DD24ST4NX9	Stainless Steel	Recessed Handle, internal control panel	17 7/8	454	23 9/16	599	22 9/16*	573*
⑦	Contemporary Single DishDrawer™	Tall	Series 9	DD24SDFTX9 N	Stainless Steel	Proud Contemporary handle, internal control panel	18 13/16	478	23 9/16	599	22 9/16*	573*
⑧	Contemporary Single DishDrawer™	Tall	Series 7	DD24SCTX9 N	Stainless Steel	Pocket handle, external control panel	17 7/8	454	23 9/16	599	22 9/16*	573*
⑨	Contemporary Single DishDrawer™		Series 7	DD24SAX9 N	Stainless Steel	Pocket handle, external control panel	16 1/8	410	23 9/16	599	22 9/16*	573*

* Excludes handle

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

SPECIFICATION GUIDE



OVERVIEW

Install your DishDrawer™ Dishwasher into an existing kitchen space or integrate into kitchen cabinetry. The touch-sensitive control panel is located inside this Integrated model, leaving an uninterrupted exterior that blends seamlessly with surrounding cabinetry.

PRODUCTS

DD24STX6I1
Integrated Dishdrawer™, 24" wide

DD24STX6HI1
Integrated Dishdrawer™ with water softener, 24" wide

ACCESSORIES

PRE-FINISHED PANEL
Brushed stainless steel - ADDD24STPX

PRE-FINISHED PANELS WITH RECESSED HANDLES
Brushed stainless steel - ADDD24STNX
Matte black glass - ADDD24STZB


HANDLES
Handles are available for the Dishdrawer™ including Contemporary, Professional, and Classic styles. Options include brushed aluminium, black, and stainless steel finishes. Two handle kits are required for double drawer models.

FEATURES

- ① Eight wash programs including Auto, 60min and Glassware, while modifiers such as Sanitize, Dry+ and Quiet provide added wash flexibility. The Quiet wash modifier reduces the noise on some cycles while maintaining performance - perfect for late night washing.
- ② Drawer fits full-size dinner plates up to 12 3/16", with flexible racking for large cookware.
- ③ Wi-Fi capability and a SmartHQ™ app to see cycle status and notifications.
- ④ With the flexibility of ergonomic placement and function, single DishDrawer™ Dishwashers can be distributed throughout the kitchen to support patterns of use. The touch-sensitive control panel is located inside this Integrated model, leaving an uninterrupted exterior that blends seamlessly with surrounding cabinetry.
- ⑤ For ease-of-use, these DishDrawer™ Dishwashers have a knock to pause function. A knock on the front panel will pause the dishwasher, which can be restarted by using the start button.

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

DATA SHEETS

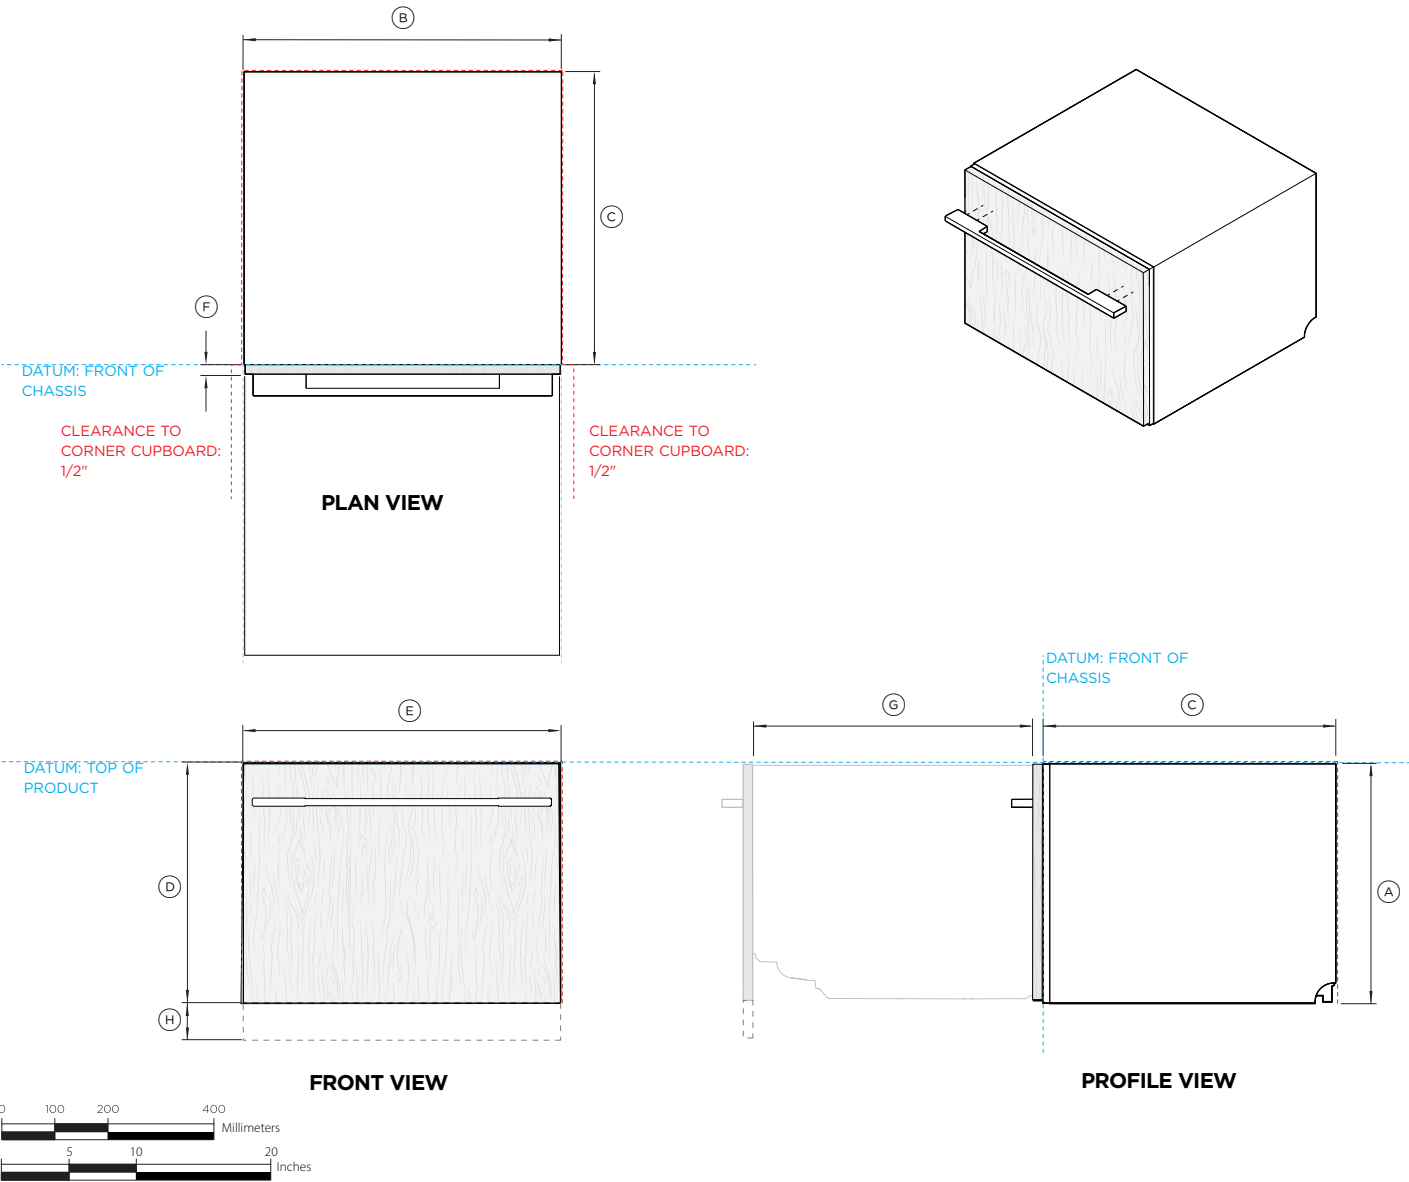

Model no:	
DD24STX6I1	Series 11, Integrated Tall Single DishDrawer™ Dishwasher
DD24STX6HI1	Series 11, Integrated Tall Single DishDrawer™ Dishwasher
Shown with:	
AHD5-OBDD-60SX	Contemporary Square Fine Handle


Product Dimensions		in	mm
A	Overall height of chassis	17 15/16	455
B	Overall width of chassis	23 9/16	599
C	Overall depth of chassis*	21 3/4	553
D	Minimum height of drawer panel	17 13/16	452
E	Minimum width of drawer panel	23 15/32	596
F	Drawer panel thickness	5/8 - 13/16	16-20
G	Maximum drawer opening	20 3/4	527
H	Maximum lower extension of drawer	2	50
	Minimum toe kick height***	3 15/16	100
	Minimum toe kick depth***	2 3/8	60
Minimum Clearances		mm	mm
	Minimum inside height of cavity	18	457
	Minimum inside width of cavity	23 5/8	600
	Minimum overall depth of cavity**	22 3/4	578
	Minimum clearance to corner cupboard	1/2	13
	Minimum clearance to adjacent cupboard door	1/16	2

*Excluding drawer panels.
**Assumes 3/4" drawer panels.
***A minimum toe kick height of 3 15/16" and depth of 2 3/8" is required if venting through toe kick.

- INDICATES CABINETRY / PRODUCT DATUM
- INDICATES CABINETRY CLEARANCES
- INDICATES CUTOUT

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

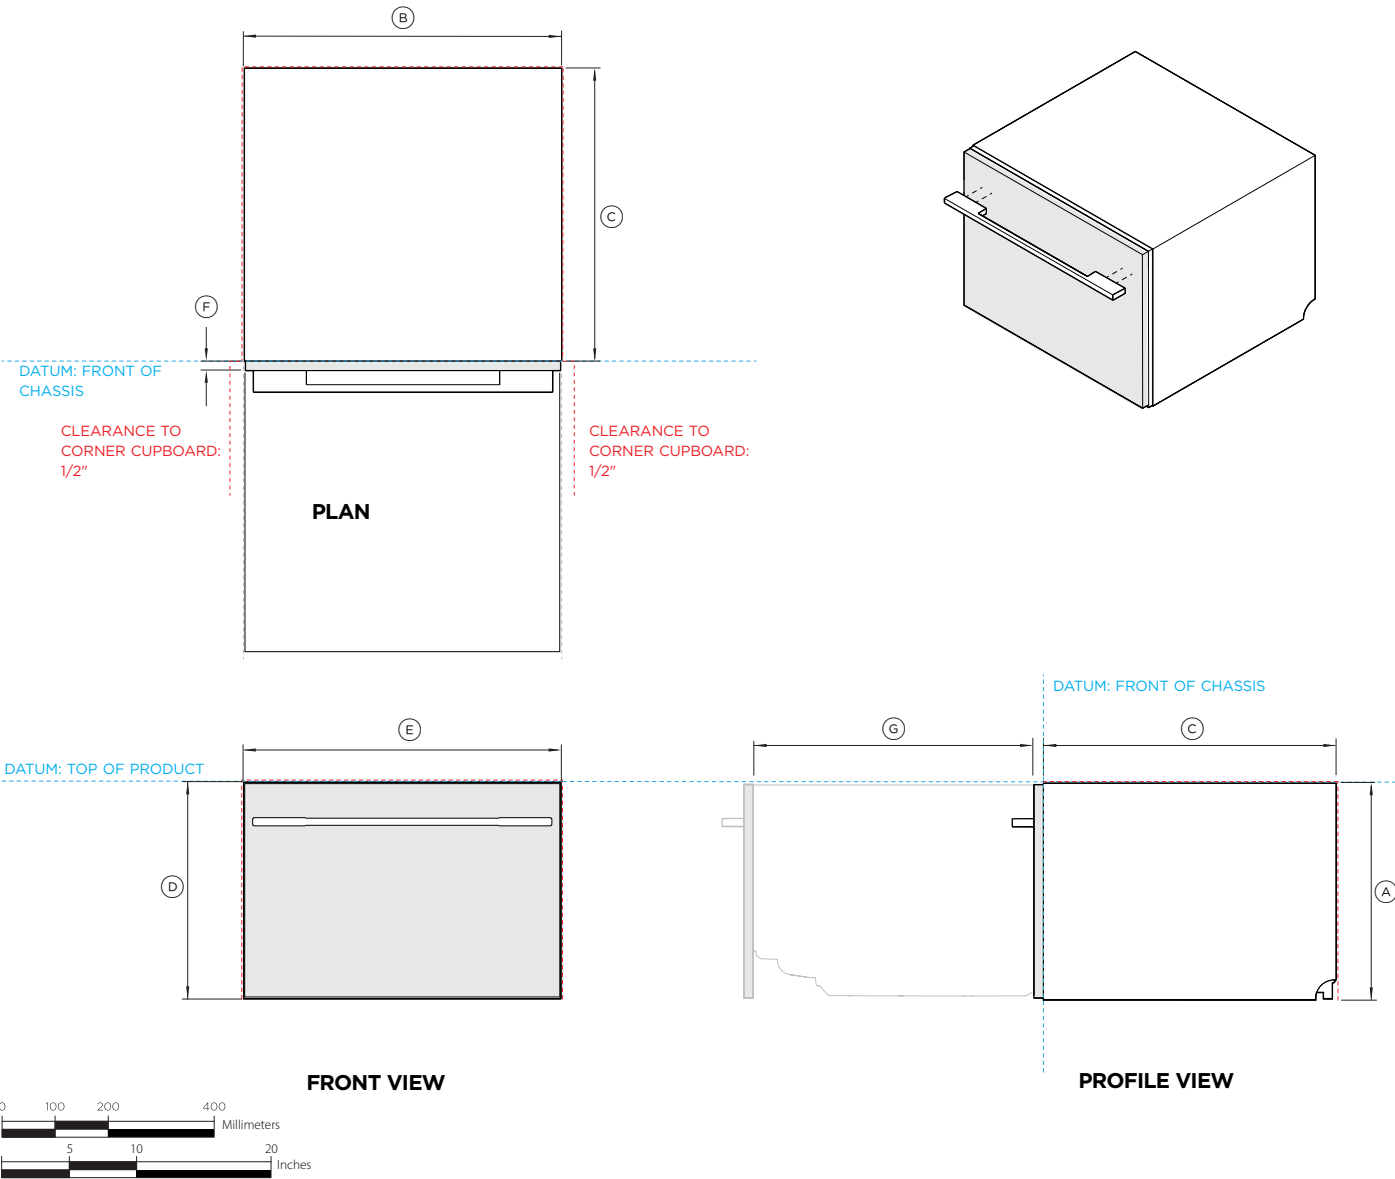

Model no:		
DD24STX6I1	Series 11, Integrated Tall Single DishDrawer™ Dishwasher	
DD24STX6HI1	Series 11, Integrated Tall Single DishDrawer™ Dishwasher	

Shown with:		
ADDD24STPX	Stainless Steel Drawer Panel	
AHD5-OBDD-60SX	Contemporary Square Fine Handle	


Product Dimensions		in	mm
Ⓐ	Overall height of product	17 15/16	455
Ⓑ	Overall width of chassis	23 9/16	599
Ⓒ	Overall depth of chassis*	21 3/4	553
Ⓓ	Height of drawer panel	17 5/8	447
Ⓔ	Width of drawer panel	23 7/16	595
Ⓕ	Depth of drawer panel	3/4	18
Ⓖ	Maximum drawer opening	20 3/4	527
	Minimum toe kick height**	3 15/16	100
	Minimum toe kick depth**	2 3/8	60
Minimum Clearances		in	mm
	Minimum inside height of cavity	18	457
	Minimum inside width of cavity	23 5/8	600
	Minimum overall depth of cavity	22 3/4	578
	Minimum clearance to corner cupboard	1/2	13
	Minimum clearance to adjacent cupboard door	1/16	2

*Excluding drawer panels.
**A minimum toe kick height of 3 15/16" and depth of 2 3/8" is required if venting through toe kick.

- INDICATES CABINETRY / PRODUCT DATUM
- INDICATES CABINETRY CLEARANCES
- INDICATES CUTOUT

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

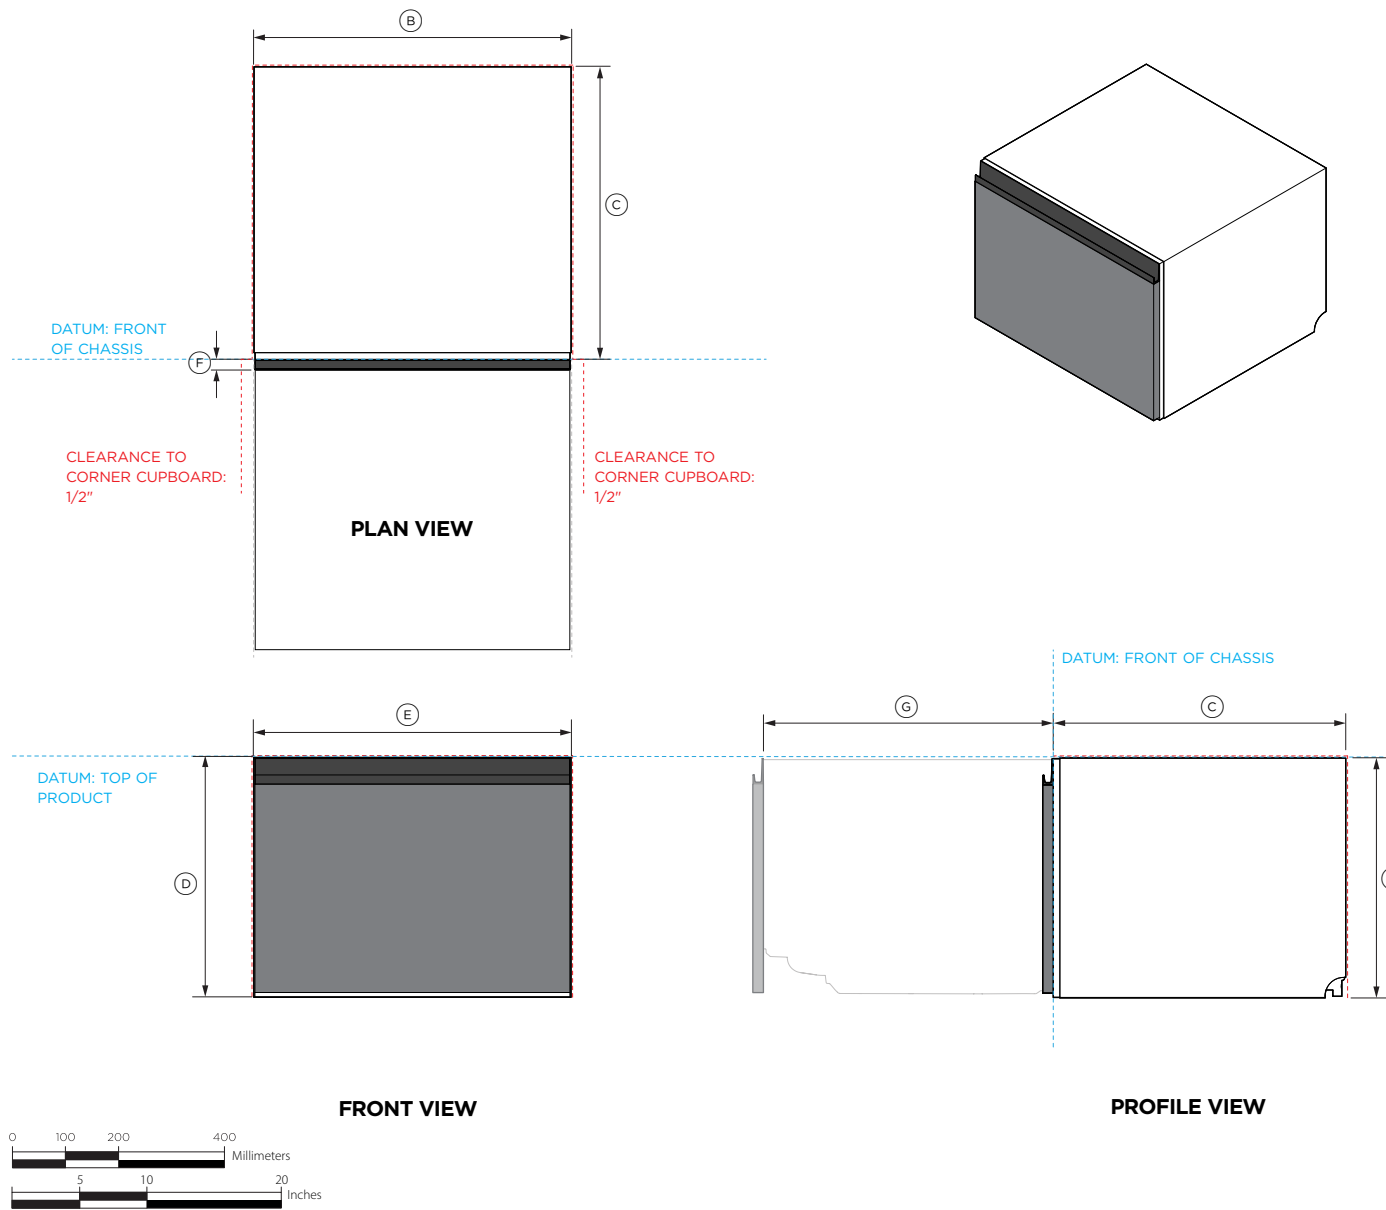

Model no:	
DD24STX6I1	Series 11, Integrated Tall Single DishDrawer™ Dishwasher
DD24STX6HI1	Series 11, Integrated Tall Single DishDrawer™ Dishwasher
Shown with:	
ADDD24STZB	Matte Black Glass Drawer Panel with Recessed handle

Product Dimensions	in	mm
(A) Overall height of product	17 15/16	455
(B) Overall width of product	23 9/16	599
(C) Overall depth of chassis*	21 3/4	553
(D) Height of drawer panel	17 13/32	442
(E) Width of drawer panel	23 7/16	595
(F) Depth of drawer panel	25/32	20
(G) Maximum drawer opening	20 3/4	527
Minimum toe kick height**	3 15/16	100
Minimum toe kick depth**	2 3/8	60

Minimum Clearances	in	mm
Minimum inside height of cavity	18	457
Minimum inside width of cavity	23 5/8	600
Minimum overall depth of cavity	22 3/4	578
Minimum clearance to corner cupboard	1/2	13
Minimum clearance to adjacent cupboard door	1/16	2


*Excluding drawer panels.
.**A minimum toe kick height of 3 15/16" and depth of 2 3/8" is required if venting through toe kick.

----- INDICATES CABINETRY / PRODUCT DATUM
----- INDICATES CABINETRY CLEARANCES
----- INDICATES CUTOUT

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

ACCESSORIES

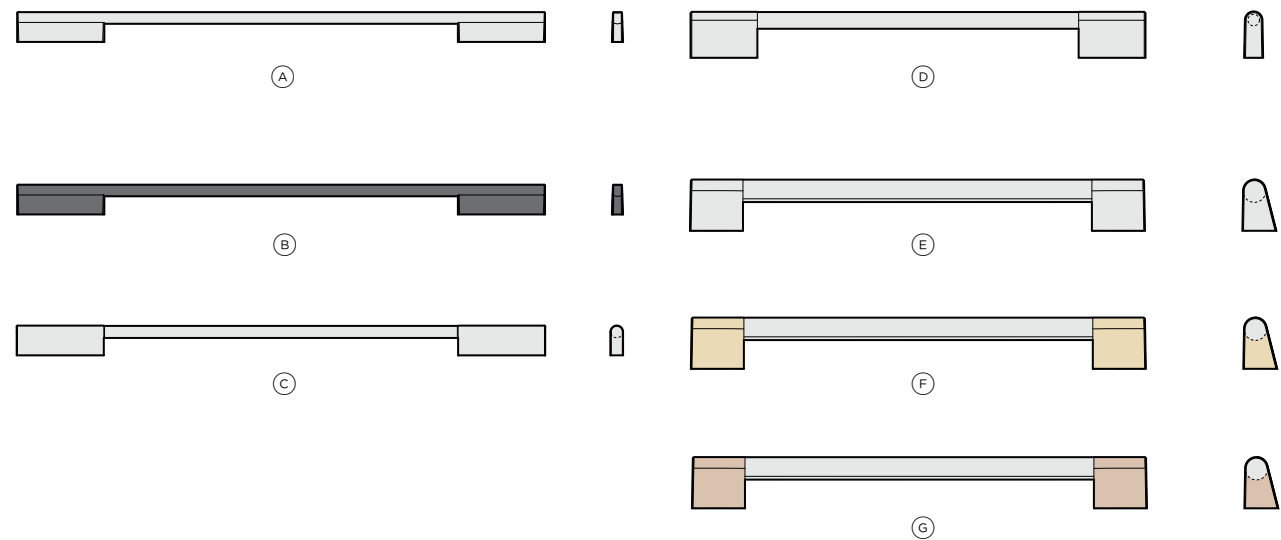

Handle kits		
Style	Model	Finish
A Contemporary square fine	AHD5-OBDD-60SX	Brushed aluminium
B Contemporary square fine black	AHD5-OBDD-60SB	Brushed black aluminium
C Contemporary round	AHS-OBDD-60S	Brushed aluminium
D Classic round	AHCL-DDDW-24X	Stainless steel
E Professional round flush	AHP3-DWDD-SX	Stainless steel
F Professional round flush	AHP3DDDW24BA	Stainless steel rail with brass off-stands
G Professional round flush	AHP3DDDW24DC	Stainless steel rail with dark copper off-stands

Note: Double Dishwasher requires two handle kits.

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

PRE-FINISHED PANELS

Drawer panel

Brushed Stainless Steel - ADDD24STPX


Drawer Panel with recessed handle

Matte black glass - ADDD24STZB

Brushed Stainless Steel - ADDD24STNX

Panel Dimensions	in	mm
Ⓐ Width of panels	23 1/2	596
Ⓑ Height of top drawer panel	17 3/8	442
Ⓒ Height of bottom drawer panel	12 1/4	311
Ⓓ Handle fixing point from top of panel	2 27/32	72
Ⓔ Handle fixing point from side of panel	3 7/32	81.5
Panel depth	23/32	18

Note: Custom toe kick panels can be installed alongside pre-finished panels using the recessed pre-finished toe kick as a mounting jig.

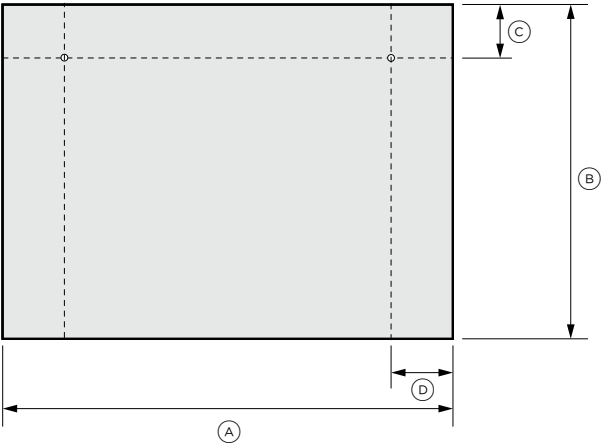

PRE-FINISHED PANEL ADDD24STPX
BRUSHED STAINLESS STEEL



PRE-FINISHED PANEL WITH RECESSED HANDLE ADDD24STZB
MATTE BLACK GLASS



PRE-FINISHED PANEL WITH RECESSED HANDLE ADDD24STNX
BRUSHED STAINLESS STEEL

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

PLANNING CONSIDERATIONS


CAVITY SPECIFICATIONS

The cavity height will vary according to your cabinetry design.

Cavity Dimensions	in	mm
A Cavity minimum height	18	457
B Cavity width	23 5/8	600
C Minimum cavity depth*	22 3/4	578
D Minimum toe kick height**	3 15/16	100
E Minimum toe kick depth**	2 3/8	60

*Assumes 3/4" door panels. Ensure there are no obstructions in the cavity if minimum cavity depth and width are specified.

**A minimum toe kick height of 3 15/16" and depth of 2 3/8" is required if venting through toe kick.

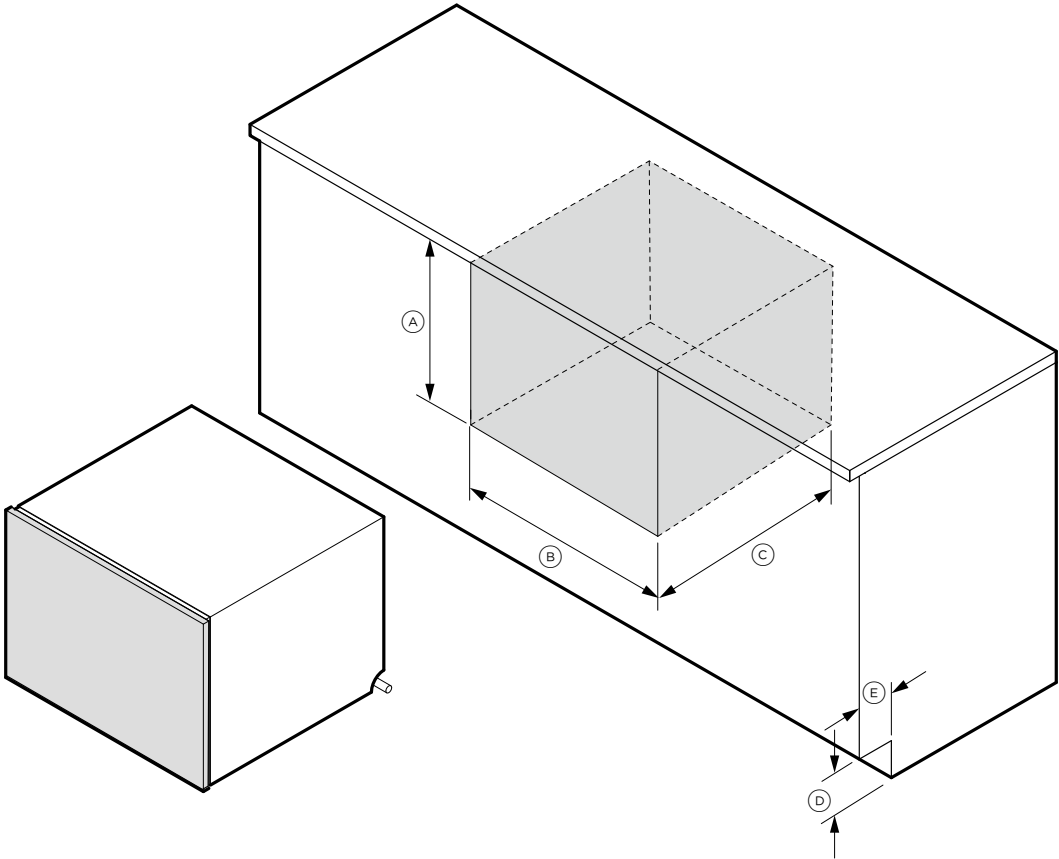


CAVITY PACKING PLACEMENT

The dishwasher must be secured through chassis and into the cabinet sides. If the cavity is over width, packers must be installed to avoid bowing the chassis.

Side and top brackets may be installed and fixed to the edge of the cabinet.

Dimensions	in	mm
Ⓐ Width between packers	23 5/8	600
Ⓑ Center of fixing points from top of chassis	13 3/8	340

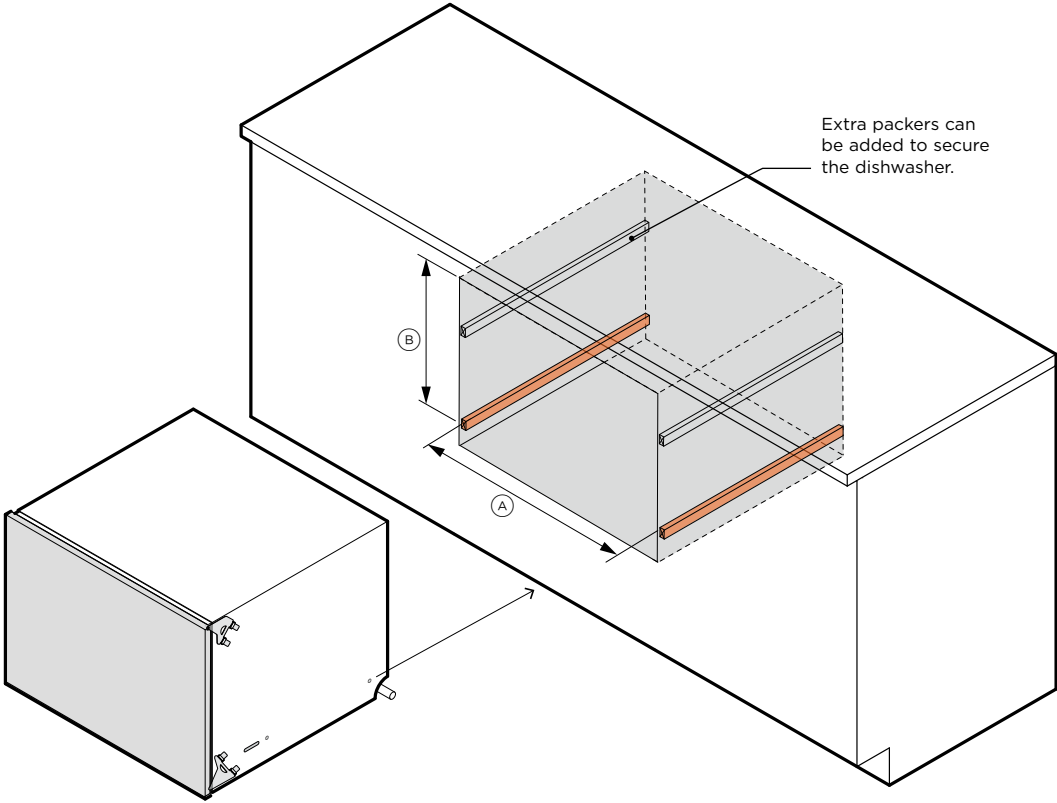


The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com


CUSTOM PANEL SPECIFICATIONS

Ensure that there are no obstructions under the counter top if the dishwasher is installed directly below.

Dimensions	mm	mm
Ⓐ Minimum panel width	23 15/32	596
Ⓑ Minimum panel height	17 13/16	452
Ⓒ Minimum clearance gap between drawers	1/16	2
Maximum lower panel extension	2	50

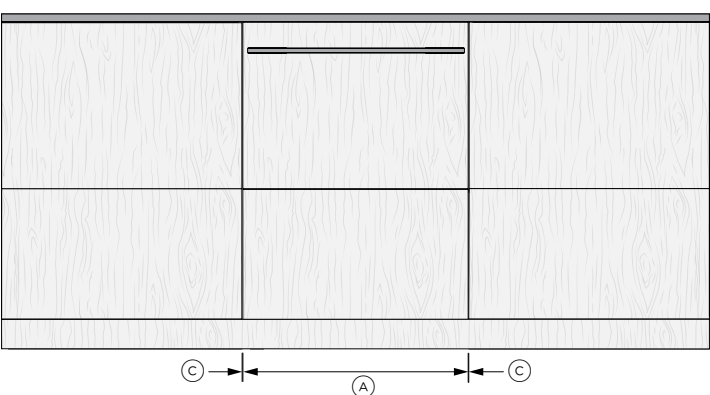

FRONT VIEW
MINIMUM CAVITY HEIGHT WITH EXTENDED PANEL

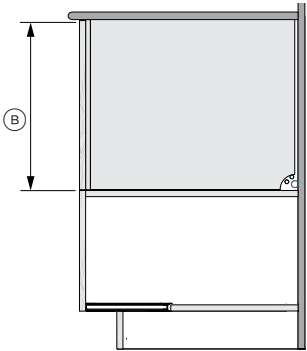

SECTION VIEW


EXTENDING CUSTOM PANELS

Custom panels may need to extend to cover cabinet side walls or frames, or to create recessed handles.


Make sure the dishwasher drawer can always close securely against the seals on the chassis.

The dishwasher drawers must seal properly when closed to prevent humidity escape and condensation, which can damage the custom panel.


If the custom drawer panel contacts any cabinetry, the seal may be compromised, allowing humidity to escape and damage the drawer panels or cabinetry.

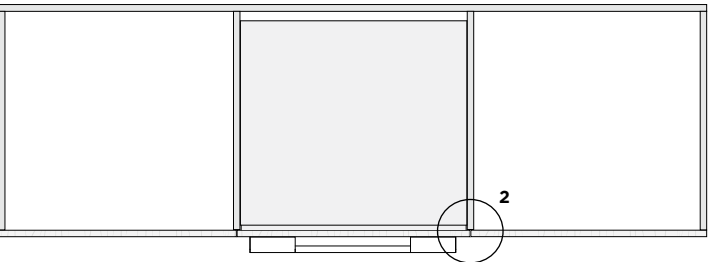


PLAN VIEW

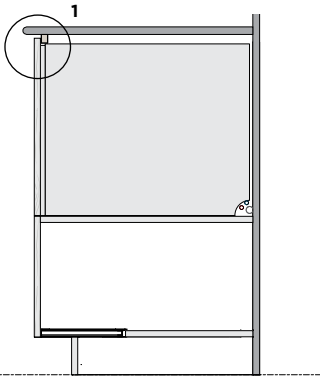

SECTION VIEW



DETAIL 1



DETAIL 2

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website fisherpaykel.com

PLANNING CONSIDERATIONS | **DUAL INSTALLATION**


SIDE BY SIDE

The chassis is screwed to the cabinet side and requires a dividing panel between the dishwashers. Shorter screws may be required.


Dimensions	in	mm
Ⓐ Cavity width	23 5/8	600
Ⓑ Minimum custom panel width*	23 15/32	596
Ⓒ Pre-finished panel width	23 7/16	595

*Panel width depends on your cabinetry style, which may be overlay, framed, or standard.


Ensure that there is a small gap between the custom panel and any cabinetry behind it to allow a good seal.

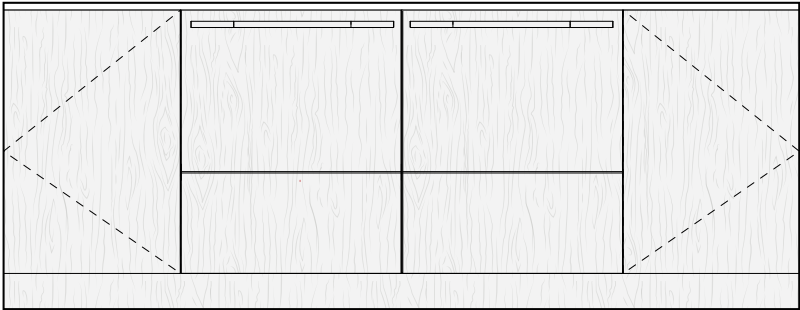


FRONT VIEW
SIDE BY SIDE INSTALLATION

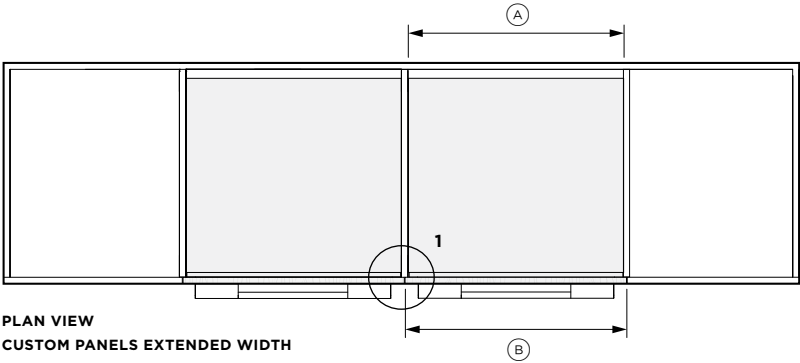


PLAN VIEW
CUSTOM PANELS EXTENDED WIDTH



DETAIL 1
PANEL EXTENDED TO CENTER OF
CABINET DIVIDER

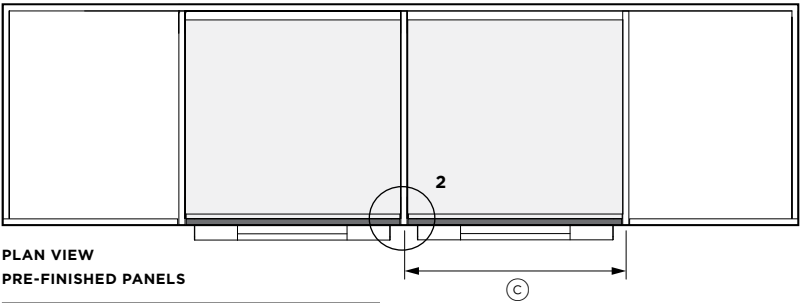

PLAN VIEW
PRE-FINISHED PANELS



DETAIL 2
SIDE BY SIDE CONFIGURATON
WITH PRE-FINISHED PANELS

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

PLANNING CONSIDERATIONS | COOLDRAWER™ AND DISHWASHER SIDE BY SIDE INSTALLATION


SIDE BY SIDE

For detailed Cooldrawer™ information refer to the Cooldrawer™ Planning Guide at fisherpaykel.com
Classic handle kit shown for Cooldrawer (AHCLRD36S) and dishwasher (AHCL-DDDW-60X).

Other compatible handles:
Square fine aluminium
Cooldrawer AHD5RD36S and
Dishwasher AHD5-OBDD-60SX
Square fine black
Cooldrawer AHD5RD36SB
Dishwasher AHD5-OBDD-60SB

Cooldrawer™ Dimensions	in	mm
A Cooldrawer™ minimum cavity height	26 3/16 - 30 1/16	665 - 764
B Cooldrawer™ cavity width	34	864
C Cooldrawer™ minimum panel height	min 18 3/4	min 476
D Cooldrawer™ minimum panel width	35 5/16	896
E Cooldrawer™ false panel height	5 15/16 - 7 1/8	150 - 180

Note: Custom door panel and toe kicks to be manufactured and fitted by cabinetmaker.

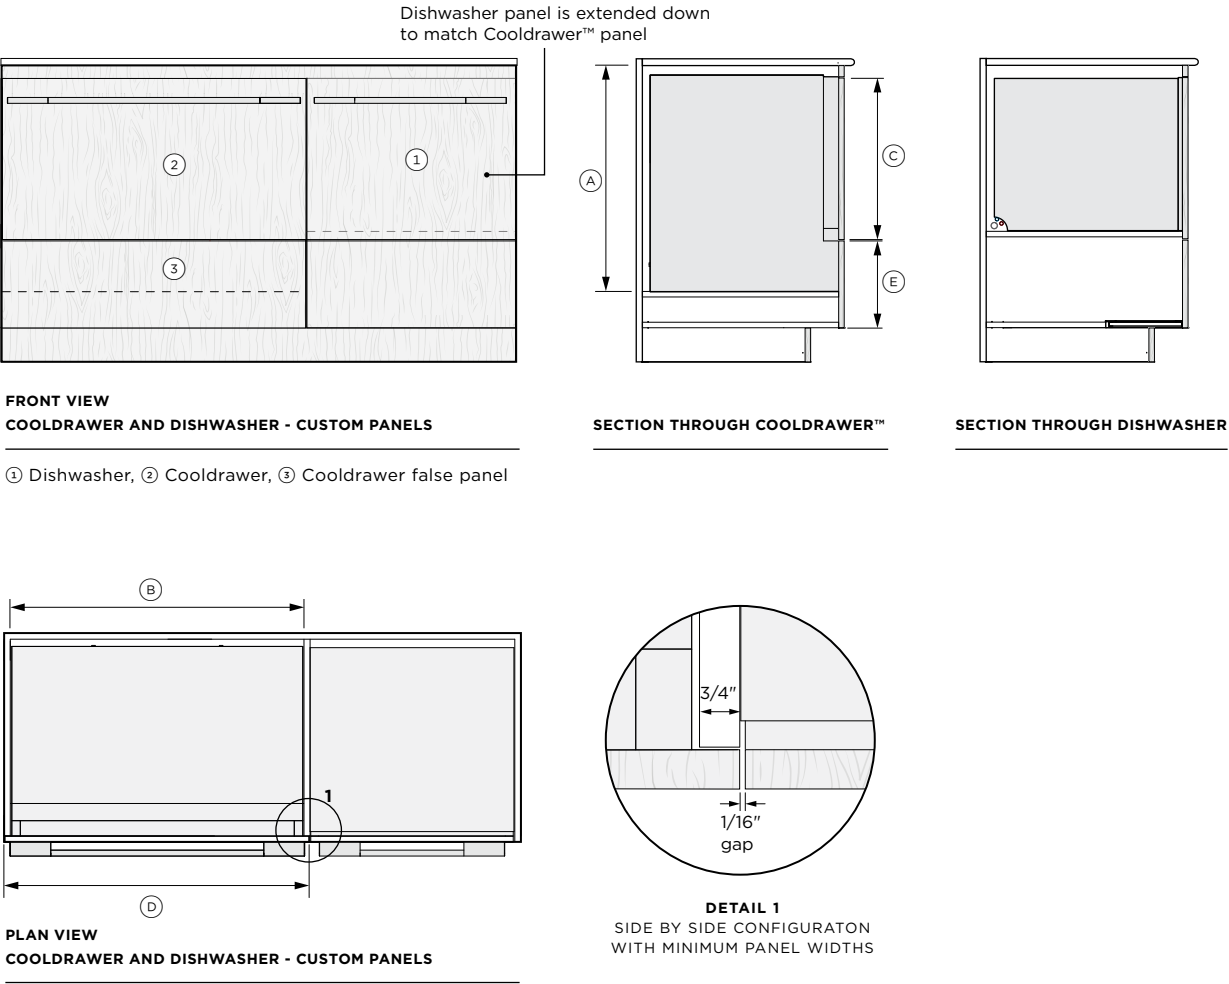

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com


CUSTOM DRAWER PANEL PREPARATION

CUSTOM PANEL SPECIFICATIONS

Panel width will vary according to your cabinet specifications.

Custom drawer panel and toe kicks should be manufactured and fitted by a cabinetmaker.

Panel Dimensions	in	mm
(A) Minimum panel width	23 15/32	596
(B) Minimum panel height	17 13/16	452
(C) Maximum panel extension at bottom	2	50
Maximum panel weight of drawer panel including handle	20lb	9kg

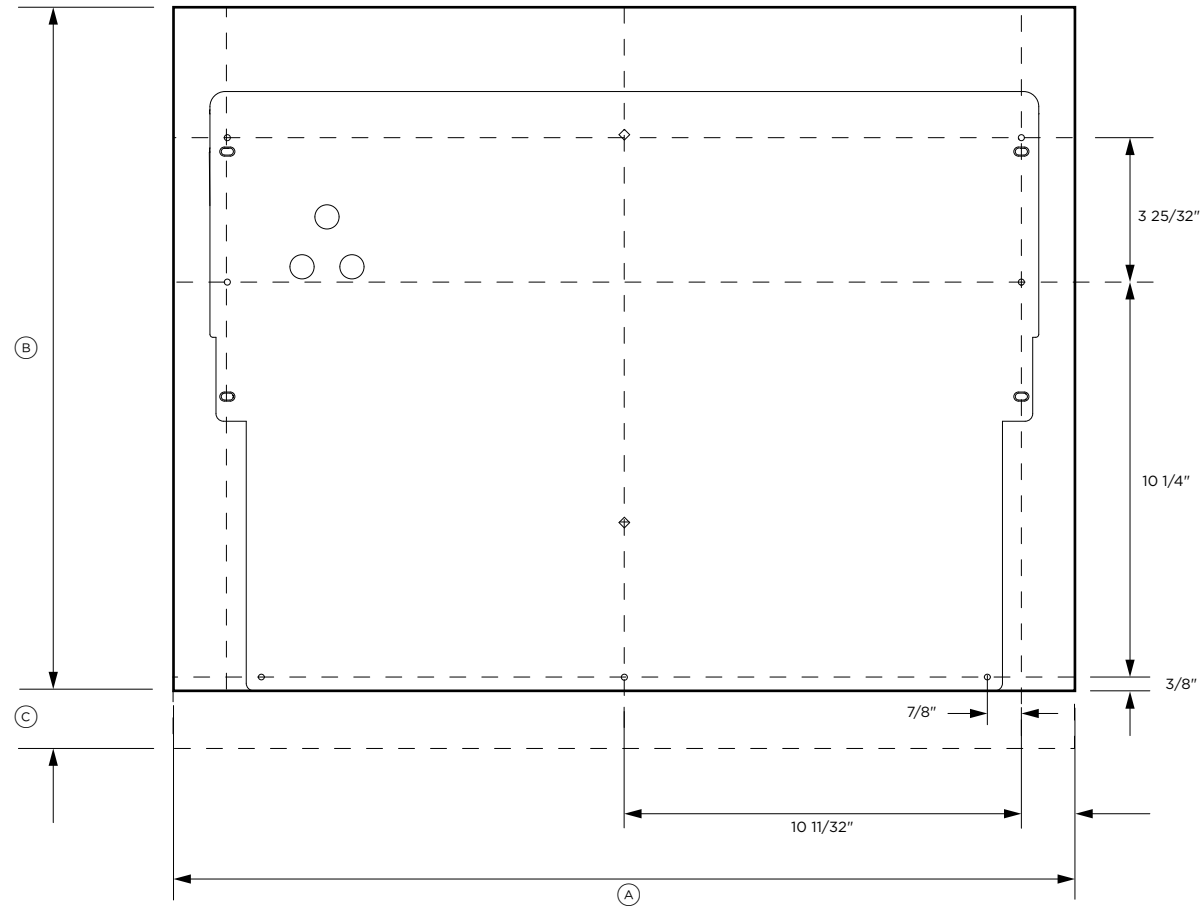

PANEL - BACK VIEW

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com


VENTING SPECIFICATIONS

PLANNING CONSIDERATIONS | VENTILATION OPTIONS


VENT HOSE

The vent hose may be coiled in the toe kick space, but ensure that there are no sharp bends or kinks.


The minimum service hole size is 2 1/4" in diameter.
The service hole closest to the dishwasher must be 21 3/16" from the front of the DishDrawer, excluding panels, to avoid constricting or damaging the vent hose.

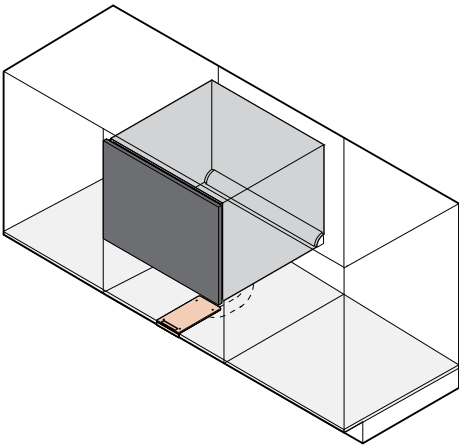


ISOMETRIC VIEW
VENT UNDER DISHWASHER

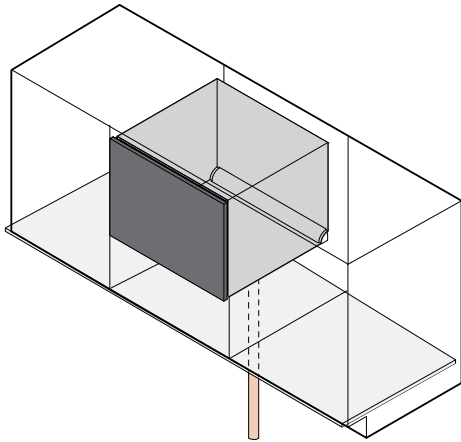

ISOMETRIC VIEW
VENTING UNDER FLOOR

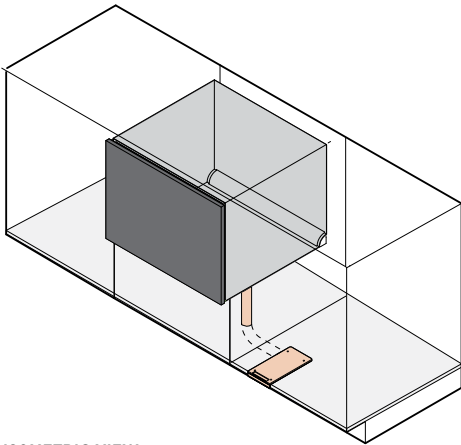

ISOMETRIC VIEW
VENTING TO ADJACENT CABINET

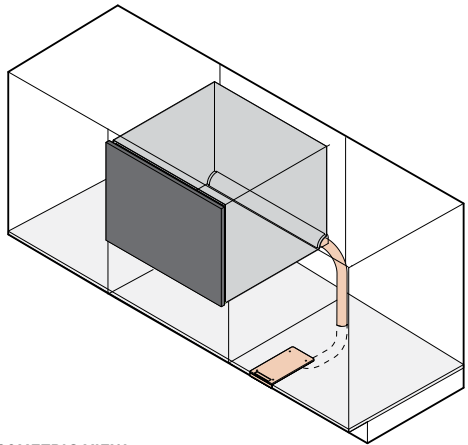

ISOMETRIC VIEW
VENTING TO ADJACENT CABINET

VENT UNDER DISHWASHER

Route the vent hose below the dishwasher cavity. The duct can be installed under a drawer, provided there is a 2 3/8" gap behind the drawer.

VENT HOSE UNDER FLOOR

The vent hose can be installed below the dishwasher cavity and through the floor into an open and ventilated area. The duct will not be required.

VENTING TO ADJACENT CABINET

Route the vent hose under the dishwasher and into the toe kick space. The hose can then be routed through the toe kick space and into the adjacent left or right toe kick.

VENTING TO ADJACENT CABINET



Route the vent hose through the side wall and into the toe kick space. To avoid constricting the vent hose, place the water inlet, drainage hose, and power in a separate cabinet space.

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

PLANNING CONSIDERATIONS | DUCT PLACEMENT



DUCT INSTALLATION AT SHELF EDGE

Dimensions	in	mm
A Duct cut out width	3 15/16	100
B Duct cut out length	8 5/8	220
C Minimum toe kick height	3 15/16	100
D Minimum toe kick depth	2 3/8	60

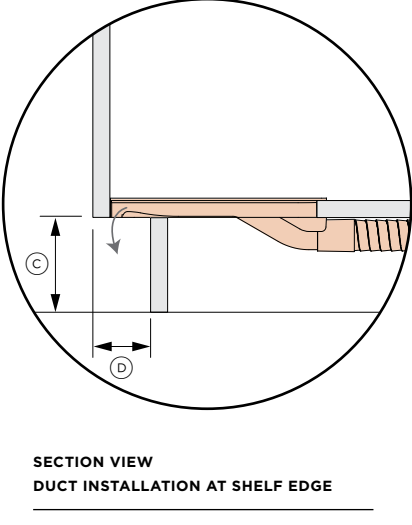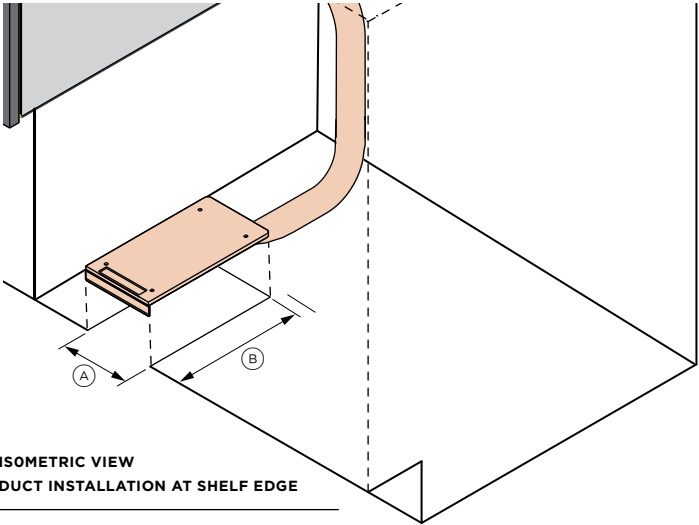


DUCT INSTALLATION INSIDE SHELF

Dimensions	in	mm
A Duct cut out width	3 15/16	100
B Duct cut out length	8 5/8	220
C Minimum toe kick height	3 15/16	100
D Minimum toe kick depth	2 3/8	60
E Optimal distance to frame	1	25

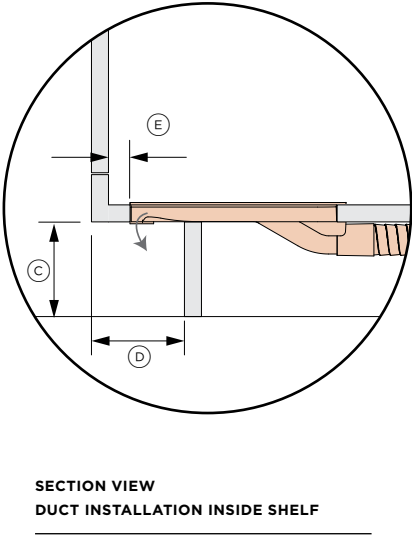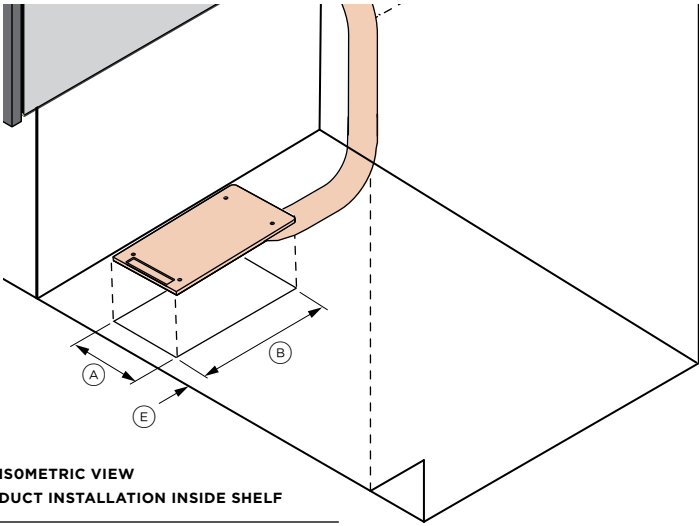


The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

SERVICES

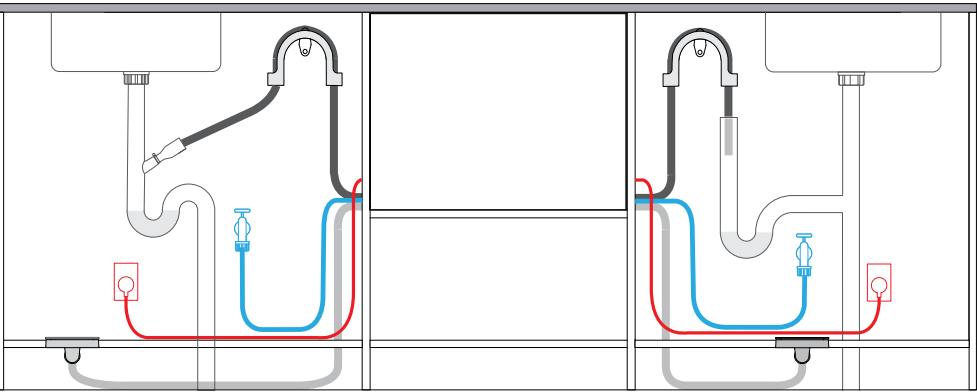

FRONT SECTION VIEW - VENT DUCT THROUGH TOE KICK

Services can be routed left or right into the adjacent cabinet. Drainage can be routed to a spigot or stand pipe.

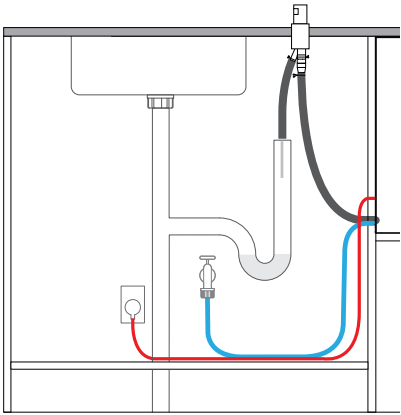

SINGLE AIR GAP INSTALLATION

Drainage can be routed to a single air gap fitting. See the installation guide for details

SERVICE REQUIREMENTS

The power cable must be routed through a service hole separate from the water and drainage.


The drain hose support should be placed as close to the underside of the counter top as possible.

Drain hoses must be installed higher than standing water with an air gap between to avoid drainage issues. Hoses can be shortened to achieve the air gap.

Hoses must not extend into a standpipe more than 120mm


Ensure that cabinet supports or other obstructions are not placed inside the cavity if the depth is minimum 578mm.

If the drain hoses supplied are not long enough to reach your services, a Fisher & Paykel drain hose extension kit is available which will extend the drain hoses by 3.6m (part number 525798).

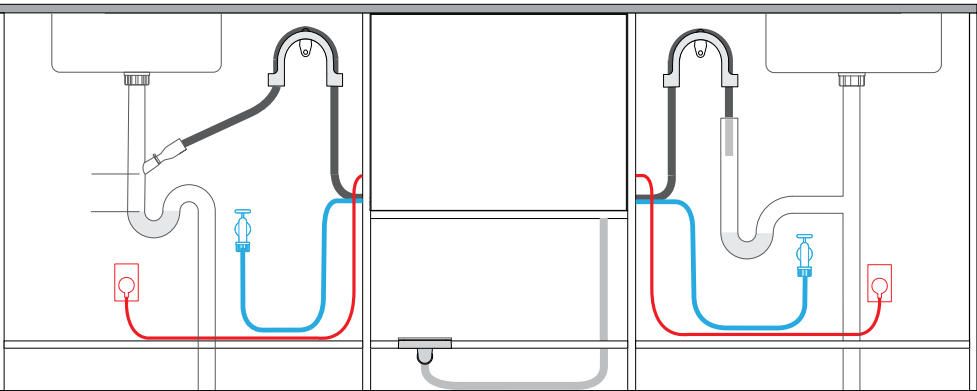


FRONT SECTION VIEW - VENT DUCT UNDER DISHWASHER

If venting under the dishwasher, the hose service hole must be large enough to rotate the vent pipe when the dishwasher is installed.

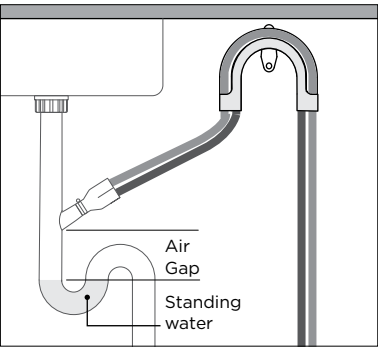

DETAIL VIEW - SPIGOT INSTALL




Spigot must be installed above the standing water with an air gap in between.

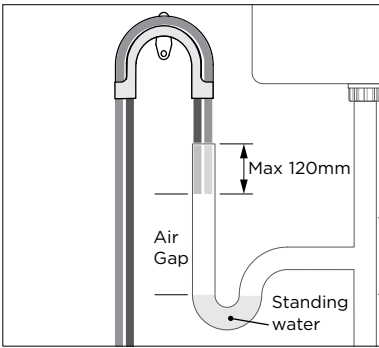

DETAIL VIEW - STAND PIPE INSTALL

Drain must be installed no more than 120mm into the stand pipe with an air gap between drain ends and standing water.

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website fisherpaykel.com

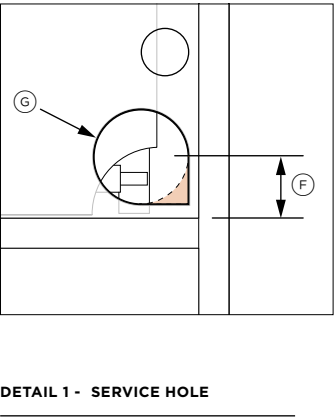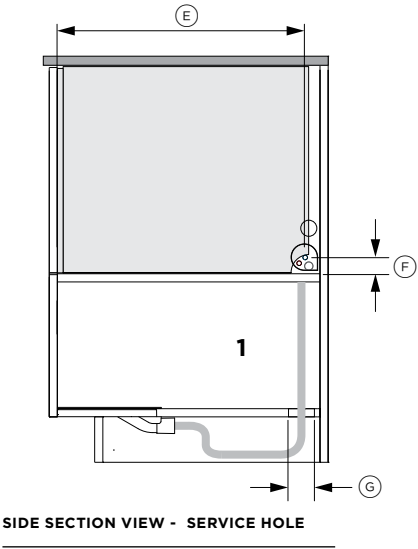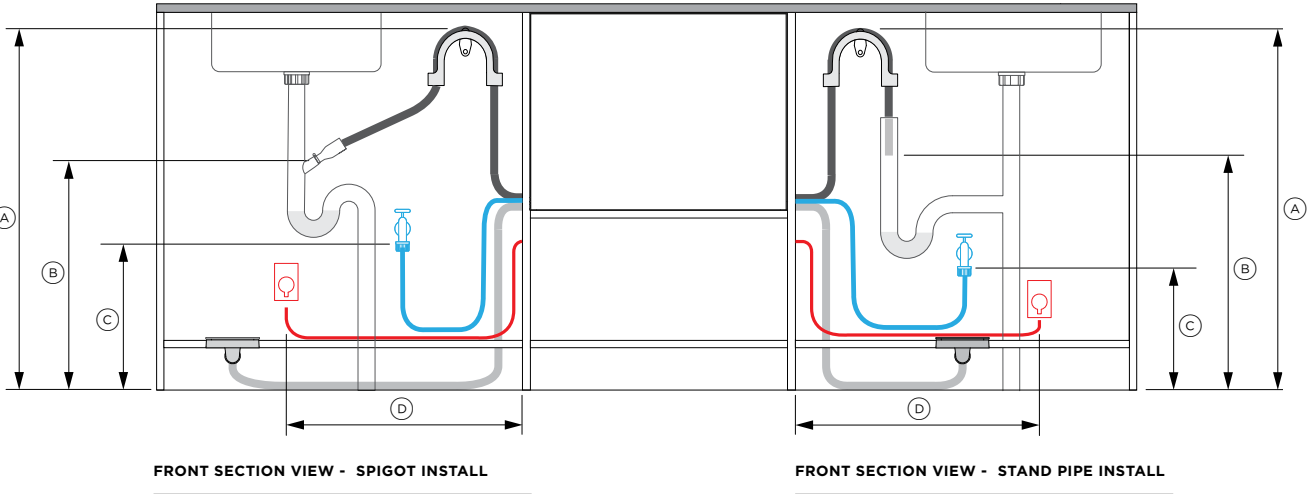


Service dimensions		in	mm
Ⓐ	Minimum distance from floor to top of hose support	29 9/16	750
Ⓑ	Minimum distance from floor to end of drain hoses*	19 11/16	500
Ⓒ	Minimum distance from floor to inlet hose connection	7 7/8	200
Ⓓ	Maximum distance from cabinetry to the centre of electrical outlet	17 3/4	450

*Distances are the same for standpipe and waste tee installation.

Minimum service hole dimensions		in	mm
Ⓔ	Minimum distance between front of product* and center of service hole	21 3/16	538
Ⓕ	Maximum distance between floor and center of service hole	1 1/2	38
Ⓖ	Minimum diameter of all service holes	2 1/4	57

*Not including dishwasher panels

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website fisherpaykel.com

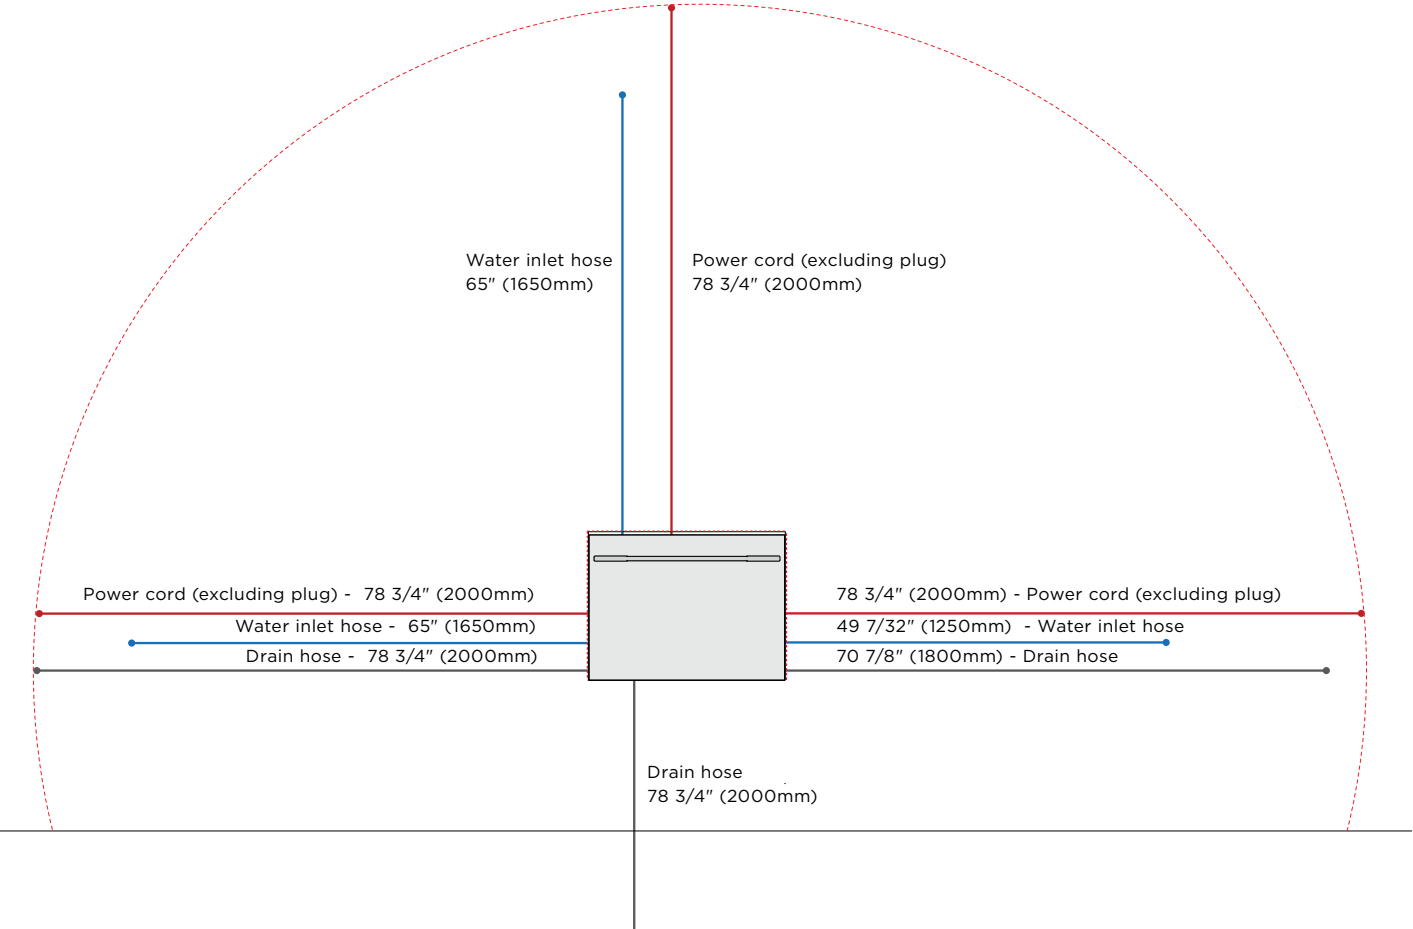

Electrical and plumbing specifications

DD24STX6I1, DD24STX6HI1

Electrical

Supply	120V, 60Hz
Service	Min 5A

Plumbing

Supply	3/8" (9 mm) male compression fitting
Pressure	
Water softener model (DD24STX6HI1)	Min. 0.1 MPa (14.5 psi) Max. 1 MPa (145 psi)
Non water softener model (DD24STX6I1)	Min. 0.03 MPa (4.3 psi) Max. 1 MPa (145 psi)
Recommended temperature	Hot (max 140°F/60°C)

Hose and cord lengths

	mm
Drain hoses*	2000
Water inlet	1650
Power	2000




*The Fisher & Paykel 11ft 9" drain hose extension kit (part number 525798) is available for purchase from fisherpaykel.com

----- INDICATES CABINETRY / PRODUCT DATUM
----- INDICATES CABINETRY CLEARANCES
----- INDICATES CUTOUT

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

DATA SHEETS: HANDLES

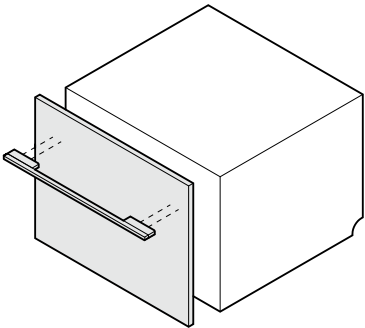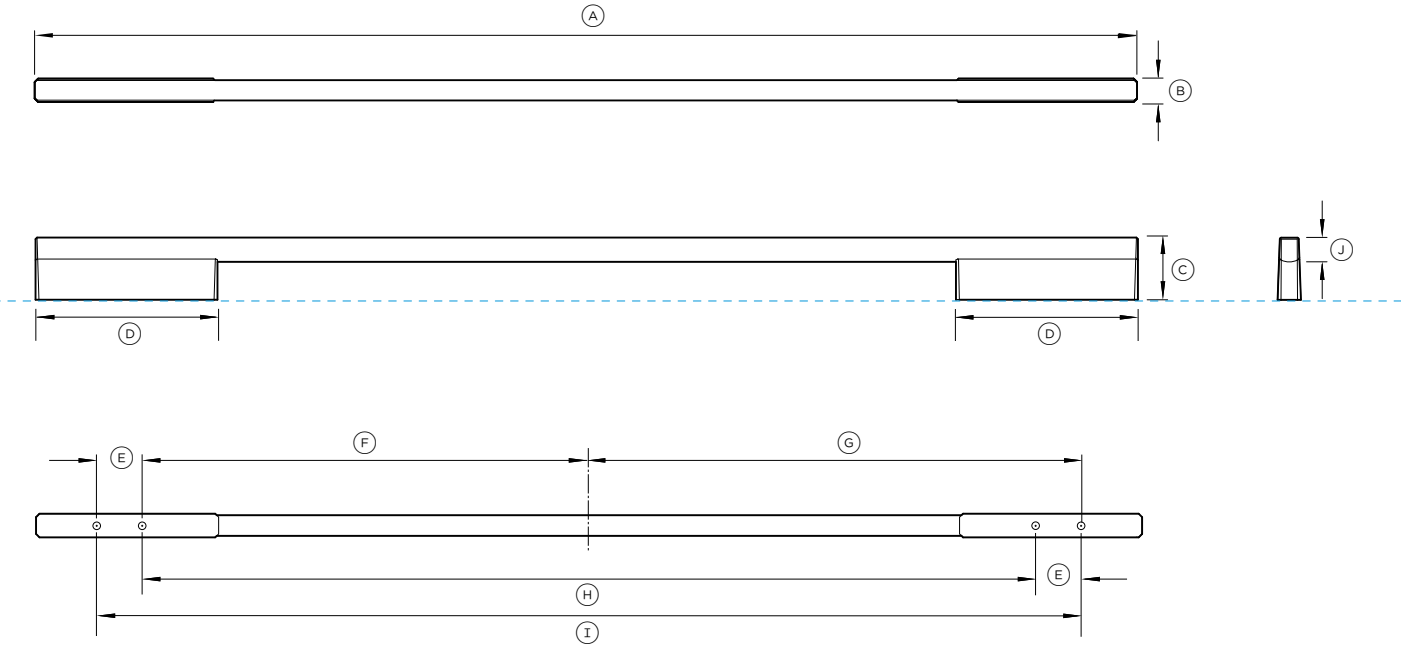

M6 X 25mm Pan Head Socket Screw (2 per handle)

Model no:
Square Fine Handle AHD5-OBDD-60SX
Black Square Fine Handle AHD5-OBDD-60SB
For Models:
DD24STX6H11 DD24STX6I1



Compatible with drawer panel kits:
Square Fine Handle for drawer Panel Kit ADDD24STPX
Custom drawer panels

Handle Dimensions	in	mm
A Overall length of handle	22 1/4	565
B Overall depth of handle	19/32	15
C Overall height of handle	1 5/8	41
D Length of off-stand	13 15/16	100
E Distance between attachment holes	1 1/4	32
F Distance from centreline to inner attachment holes	8 1/2	216
G Distance from centreline to outer attachment holes	9 25/32	248.5
H Distance between inner attachment holes	17	432
I Distance between outer attachment holes	19 9/16	497
J Thickness of handle rail	5/8	16

*Suits standard 3/4" drawer panel. Thicker drawer panels may require counter boring or longer screws.

Note: Single Dishwasher requires one handle kit. Double Dishwasher requires two handle kits.

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the Installation Guide for detailed information on installing the product. For full installation instructions visit fisherpaykel.com

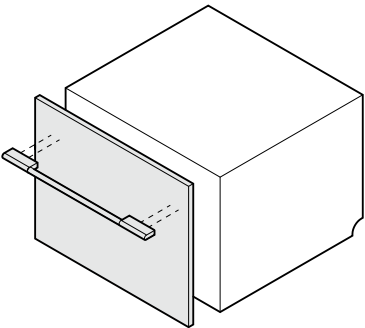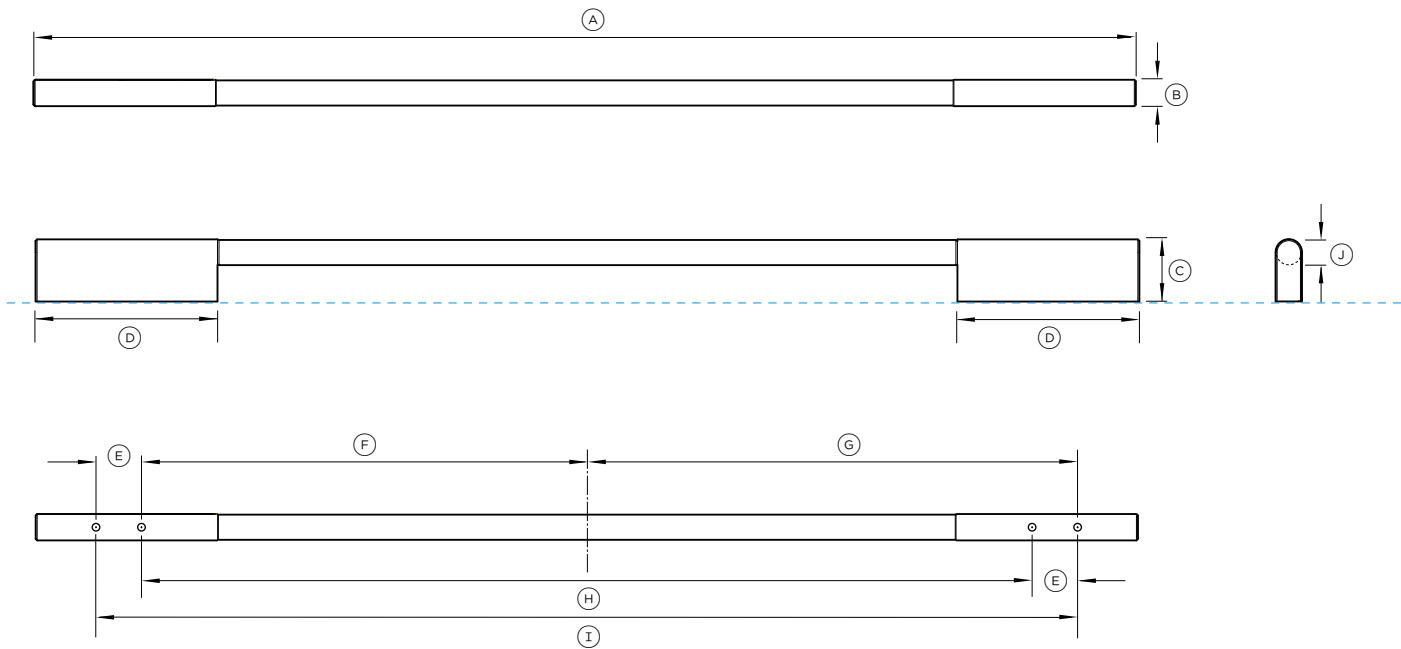

M6 X 25mm Pan Head Socket Screw (2 per handle)

Model no:
Round Handle AHS-OBDD-60S

For Models:
DD24STX6H11 DD24STX6I1



Compatible with drawer panel kits:
Square Fine Handle for drawer Panel Kit ADDD24STPX
Custom drawer panels

Handle Dimensions	in	mm
A Overall length of handle	22 1/4	565
B Overall depth of handle	11/16	17
C Overall height of handle	1 5/8	41
D Length of off-stand	13 15/16	100
E Distance between attachment holes	1 1/4	32
F Distance from centreline to inner attachment holes	8 1/2	216
G Distance from centreline to outer attachment holes	9 25/32	248.5
H Distance between inner attachment holes	17	432
I Distance between outer attachment holes	19 9/16	497
J Thickness of handle rail	5/8	16

*Suits standard 3/4" drawer panel. Thicker drawer panels may require counter boring or longer screws.

Note: Single Dishwasher requires one handle kit. Double Dishwasher requires two handle kits.

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the Installation Guide for detailed information on installing the product. For full installation instructions visit fisherpaykel.com

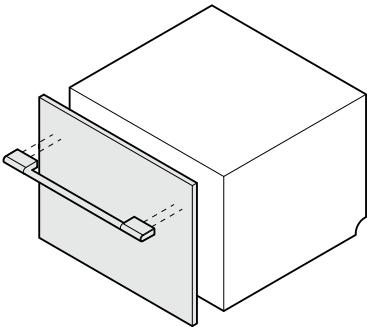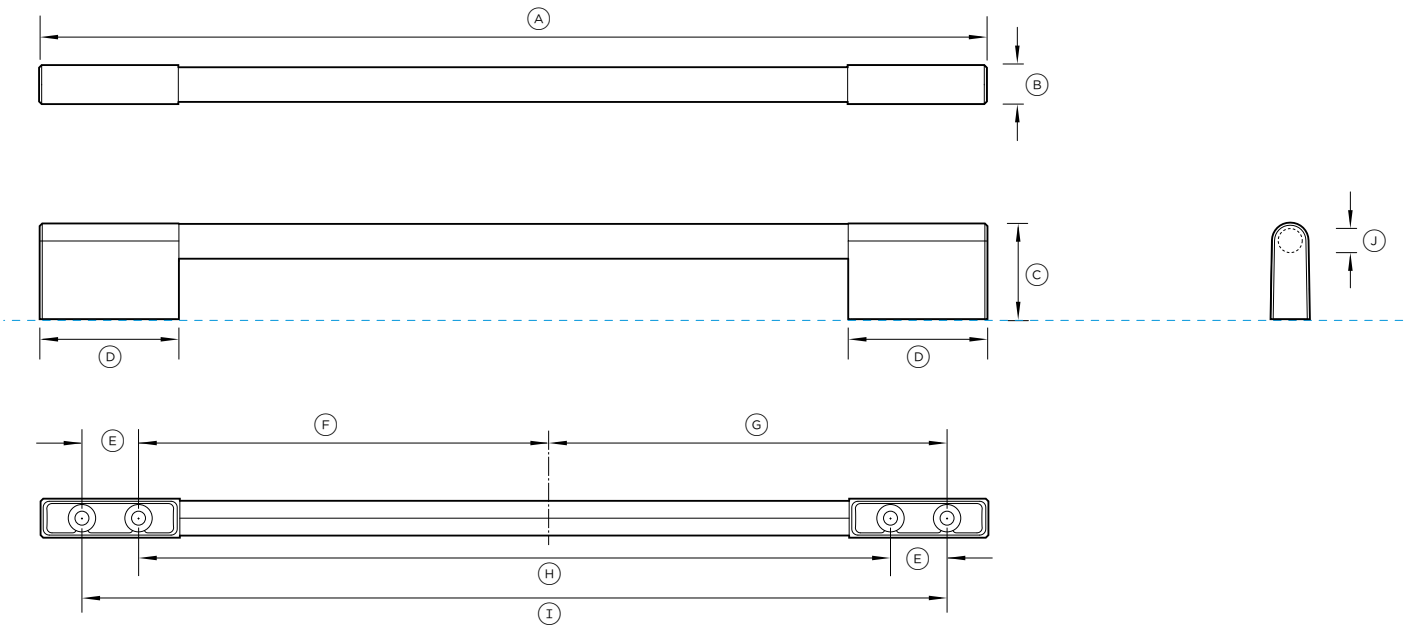

M6 X 25mm Pan Head Socket Screw (2 per handle)

Model no:
Classic Round Handle AHCL-DDDW-24X

For Models:
DD24STX6H11 DD24STX611




Compatible with drawer panel kits:
Square Fine Handle for drawer Panel Kit ADDD24STPX
Custom drawer panels

Handle Dimensions	in	mm
A Overall length of handle	21 13/32	544
B Overall depth of handle	7/8	22
C Overall height of handle	2 5/32	55
D Length of off-stand	3 5/32	80
E Distance between attachment holes	1 1/4	32
F Distance from centreline to inner attachment holes	8 1/2	216
G Distance from centreline to outer attachment holes	9 25/32	248.5
H Distance between inner attachment holes	17	432
I Distance between outer attachment holes	19 9/16	497
J Diameter of handle rail	25/32	20

*Suits standard 19mm drawer panel. Thicker drawer panels may require counter boring or longer screws.

Note: Single Dishwasher requires one handle kit. Double Dishwasher requires two handle kits.

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the Installation Guide for detailed information on installing the product. For full installation instructions visit fisherpaykel.com

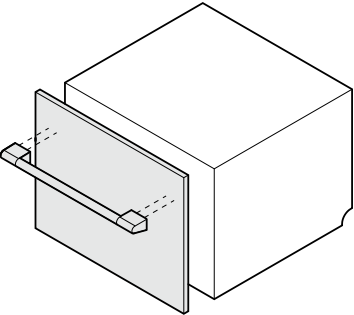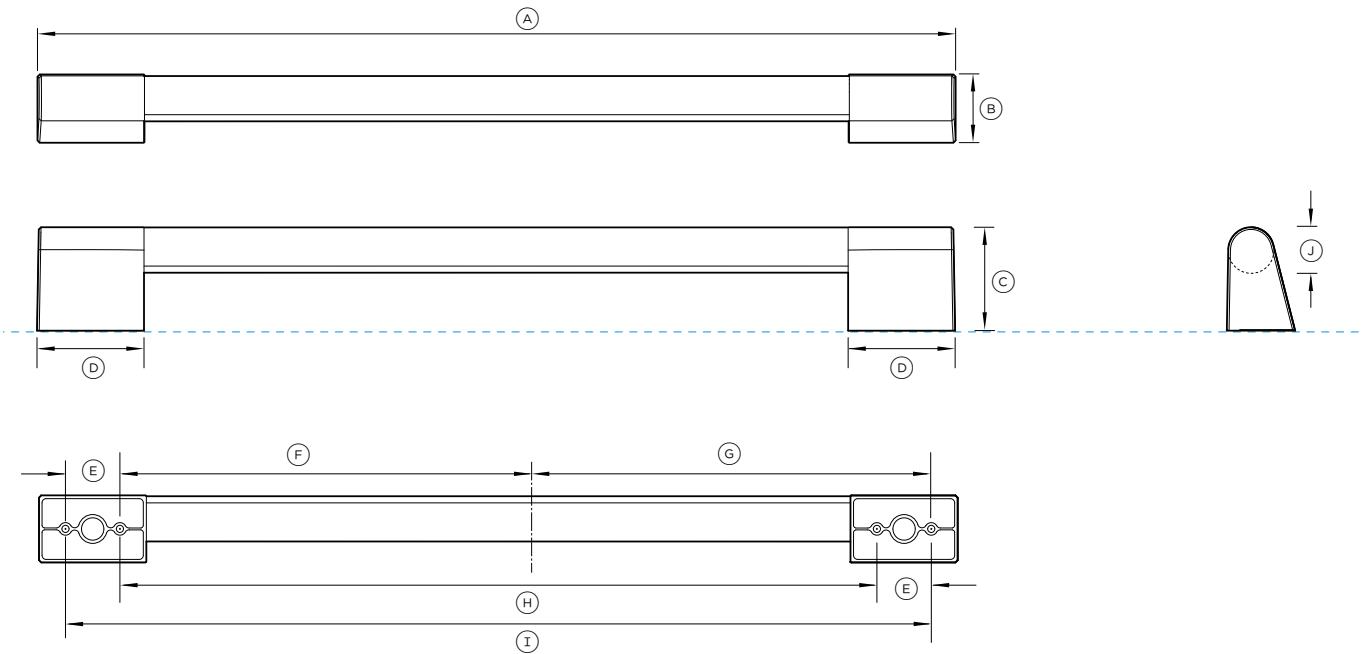

M6 X 25mm Pan Head Socket Screw (2 per handle)

Model no:
Stainless steel AHP3-DWDD-SX
Stainless steel rail with brass off-stands AHP3DDDW24BA
Stainless steel rail with dark copper off-stands AHP3DDDW24DC

For Models:
DD24STX6HI DD24STX6II

Compatible with drawer panel kits:
Square Fine Handle for drawer Panel Kit ADDD24STPX
Custom drawer panels

Handle Dimensions	in	mm
Ⓐ Overall length of handle	20 9/32	515
Ⓑ Overall depth of handle	1 1/2	38
Ⓒ Overall height of handle	2 9/32	58
Ⓓ Length of off-stand	2 3/8	60
Ⓔ Distance between attachment holes	1 1/4	32
Ⓕ Distance from centreline to inner attachment holes	8 1/2	216
Ⓖ Distance from centreline to outer attachment holes	9 25/32	248.5
Ⓖ Distance between inner attachment holes	17	432
Ⓖ Distance between outer attachment holes	19 9/16	497
Ⓙ Diameter of handle rail	5/8	25

*Suits standard 19mm drawer panel. Thicker drawer panels may require counter boring or longer screws.

Note: Single Dishwasher requires one handle kit. Double Dishwasher requires two handle kits.

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the Installation Guide for detailed information on installing the product. For full installation instructions visit fisherpaykel.com

