
COMBI-MICROWAVE OVEN INSTALLATION CONSIDERATIONS

Accessing your product specifications

3

Electrical connection

6

FISHER & PAYKEL

NZ AU UK IE

MINIMAL

OM76NMUB3, OM76NMUG3, OM76NMUNB3, OM76NMUNG3,
OM60NMUNB5, OM60NMUNG5, OM60NMTB5, OM60NMTG5,
OM60NMUB5, OM60NMUG5

CONTEMPORARY

OM76NCUDX3, OM60NCUDX5, OM60NCTDX5

PROFESSIONAL

OM76NPUX3



ACCESSING YOUR PRODUCT SPECIFICATIONS



For full product, cabinetry and service specifications, refer to the Planning Guide. To access the Planning Guide, scan the QR code or visit fisherpaykel.com/specify. Search by appliance type, product name or model code.

OM76N MINIMAL AND CONTEMPORARY MODELS

OM76NMUB3, OM76NMUG3, OM76NMUNB3, OM76NMUNG3, OM76NCUDX3

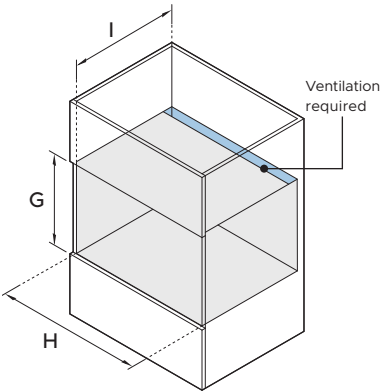

PRODUCT DIMENSIONS		mm
A	Overall height	458
B	Overall width	758
C	Chassis height	435
D	Chassis width	720
E	Chassis depth	545
F	Control panel thickness	20
	Depth with door fully open*	320

*Measured from front of control panel.

CAVITY DIMENSIONS		mm
A	Minimum inside height of cavity	440
B	Minimum inside width of cavity	724
C	Minimum inside depth of cavity*	550**
	Recommended cabinet height	460
	Recommended cabinet width	762



*Excluding control panel thickness.

**Requires ventilation at the rear of the cavity.



For full product, cabinetry and service specifications, refer to the Planning Guide. To access the Planning Guide, scan the QR code or visit fisherpaykel.com/specify. Search by appliance type, product name or model code.

OM76N PROFESSIONAL MODELS
OM76NPUX3

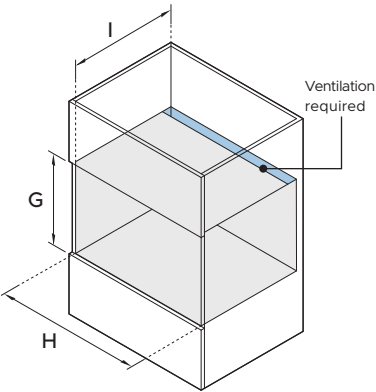

PRODUCT DIMENSIONS		mm
A	Overall height	458
B	Overall width	758
C	Chassis height	435
D	Chassis width	720
E	Chassis depth	545
F	Control panel thickness	24
	Depth with door fully open*	320

*Measured from front of control panel.

CAVITY DIMENSIONS		mm
A	Minimum inside height of cavity	440
B	Minimum inside width of cavity	724
C	Minimum inside depth of cavity*	550**
	Recommended cabinet height	460
	Recommended cabinet width	762

*Excluding control panel thickness.



**Requires ventilation at the rear of the cavity.



For full product, cabinetry and service specifications, refer to the Planning Guide. To access the Planning Guide, scan the QR code or visit fisherpaykel.com/specify. Search by appliance type, product name or model code.

OM60N MINIMAL AND CONTEMPORARY MODELS

OM60NMUNB5, OM60NMUNG5, OM60NMTB5, OM60NMTG5, OM60NMUB5, OM60NMUG5, OM60NCUDX5, OM60NCTDX5

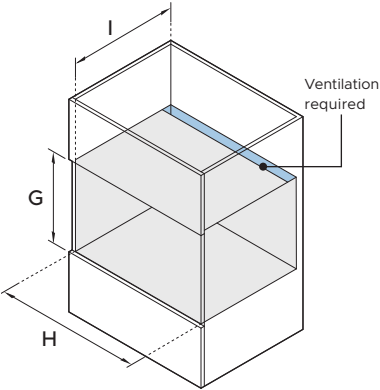

PRODUCT DIMENSIONS		mm
A	Overall height	458
B	Overall width	596
C	Chassis height	435
D	Chassis width	556
E	Chassis depth	545
F	Control panel thickness	20
	Depth with door fully open*	324

*Measured from front of control panel.

CAVITY DIMENSIONS		mm
A	Minimum inside height of cavity	440
B	Minimum inside width of cavity	560
C	Minimum inside depth of cavity*	550**
	Recommended cabinet height	460
	Recommended cabinet width	600

*Excluding control panel thickness.

**Requires ventilation at the rear of the cavity.

ELECTRICAL CONNECTION

SPECIFICATIONS	OM76 OM60 MODELS
RATED POWER (W)	3800
Hz	50
VOLTAGE (V)	220 – 240V
MICROWAVE RATED INPUT (W)	2000
MICROWAVE RATED OUTPUT (W)	900
MICROWAVE FREQUENCY (MHz)	2450

