

## MODULAR HOBS

---

# PLANNING GUIDE

---

**39CM PRIMARY INDUCTION HOB** | CI392DTTB1, CI392DTTG1

**60CM PRIMARY INDUCTION HOB** | CI604DTTB1, CI604DTTG1

**76CM PRIMARY INDUCTION HOB** | CI764DTTB1, CI764DTTG1

**90CM PRIMARY INDUCTION HOB** | CI905DTTB1, CI905DTTG1

**30CM AUXILIARY INDUCTION HOB** | CI302DB1, CI302DG1

**39CM AUXILIARY INDUCTION HOB** | CI392DB1, CI392DG1

**30CM AUXILIARY TEPPANYAKI HOB** | CIT302DX1

**39CM AUXILIARY TEPPANYAKI HOB** | CIT392DX1

**13CM MODULAR AUXILIARY DOWNDRAFT EXTRACTOR** | CD13DB1, CD13DG1, CD13DB2, CD13DG2

INTRODUCTION

This comprehensive planning guide provides you with the framework and tools to achieve your desired design outcome with Fisher & Paykel appliances. In this guide, you will find a range of conceptual, detailed, and dimensional product information to bring your ideas to life and create spaces that truly reflect your vision.

CONTENTS

| CONCEPT DESIGN      | PAGE |
|---------------------|------|
| Specification Guide | 3    |
| System Overview     | 4    |
| Primary Modules     | 6    |
| Auxiliary Modules   | 7    |

IMPORTANT NOTE

DO NOT install the hob directly above a dishwasher, fridge, freezer, washing machine or clothes dryer, as the humidity may damage the Hob electronics.

SUPPORT

For additional design planning and installation support please contact the Fisher & Paykel design support team. [designsupport@fisherpaykel.com](mailto:designsupport@fisherpaykel.com)

NOTES

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Refer to our website [fisherpaykel.com](https://fisherpaykel.com) for the latest document version. Product specifications may vary from those shown.

This Planning Guide should not be used as installation guidance for any product. Specific installation guidance will be available with the product on delivery and on our website.

| DEVELOPED AND DETAILED DESIGN              | PAGE |
|--------------------------------------------|------|
| Data Sheets                                | 9    |
| 39cm Primary Induction Hob                 | 10   |
| 60cm Primary Induction Hob                 | 11   |
| 76cm Primary Induction Hob                 | 12   |
| 90cm Primary Induction Hob                 | 13   |
| 30cm Auxiliary Induction Hob               | 14   |
| 30cm Auxiliary Teppanyaki Hob              | 15   |
| 39cm Auxiliary Induction Hob               | 16   |
| 39cm Auxiliary Teppanyaki Hob              | 17   |
| 13cm Auxiliary Downdraft Overview          | 18   |
| 13cm Auxiliary Downdraft CD13DB1, CD13DG1  | 19   |
| Supplied Ducting CD13DB1, CD13DG1          | 21   |
| 13cm Auxiliary Downdraft CD13DB2, CD13DG2  | 22   |
| Supplied Ducting CD13DB2, CD13DG2          | 24   |
| Auxiliary Downdraft - Recirculation Kit    | 25   |
| Auxiliary Downdraft - Optional Accessories | 27   |

| DEVELOPED AND DETAILED DESIGN                    | PAGE |
|--------------------------------------------------|------|
| Product Decisions                                | 28   |
| Modular System Capabilities                      | 29   |
| Modular Ventilation Capabilities                 | 30   |
| Pairing Overview                                 | 31   |
| Planning Considerations                          | 32   |
| Installation Overview                            | 33   |
| Installation Planning                            | 34   |
| Typical Configurations with Auxiliary Downdraft  | 35   |
| Typical Configurations with Overhead Ventilation | 36   |
| Benchtop Details                                 | 37   |
| Clamping Locations                               | 38   |
| Cabinetry Ventilation                            | 39   |
| Auxiliary Downdraft Components                   | 40   |
| Auxiliary Downdraft Ducting                      | 41   |
| Auxiliary Downdraft System Dimensions            | 42   |
| Auxiliary Downdraft Venting                      | 43   |
| Electrical Services                              | 44   |
| Modular Connections                              | 46   |

## SPECIFICATION GUIDE



OVERVIEW

Create the ultimate culinary solution with our Series 9 and 11 modular hobs. Using the different induction, teppan and ventilation modules, you can customise the cooking area at the scale and format best suited to architectural plan and user needs. Fusing precise induction technology with innovative design, these modules are crafted to seamlessly work together for perfect results

FEATURES

- ① Tailor the cooking space by pairing primary induction Hob modules with complementary auxiliary Hobs, downdraft ventilation and teppan modules.
- ② Control the complete modular suite from the primary Hob using a large intuitive touchscreen.
- ③ Each module is designed to fit flush or raised with the countertop for complete design freedom.
- ④ Choose from a Minimal-style, sleek black glass or subtle grey glass finish to suit your kitchen design.
- ⑤ SmartHQ™ app connectivity to monitor cook status and product.
- ⑥ Wireless Temperature Sensor precisely monitors and controls cooking in real time, for complete control.\*
- ⑦ Poach, Sous Vide and other Cook by Method functions are available on product, when using the Wireless Temperature Sensor.

\* Selected models only.

PRODUCT OVERVIEW

PRIMARY MODULAR INDUCTION HOBS

With touchscreen user interface

- CI392DTTB1 (Black), CI392DTTG1 (Grey)  
39cm Primary Induction Hob, 2 Zones with SmartZone
- CI604DTTB1 (Black), CI604DTTG1 (Grey)  
60cm Primary Induction Hob, 4 Zones with SmartZone
- CI764DTTB1 (Black), CI764DTTG1 (Grey)  
76cm Primary Induction Hob, 4 Zones with SmartZone
- CI905DTTB1 (Black), CI905DTTG1 (Grey)  
90cm Primary Induction Hob, 5 Zones with SmartZone

AUXILIARY MODULAR HOBS

No user interface. Controlled via paired primary hob.

- CI302DB1 (Black), CI302DG1 (Grey)  
30cm Auxiliary Induction Hob, 2 Zones with SmartZone
- CI392DB1 (Black), CI392DG1 (Grey)  
39cm Auxiliary Induction Hob, 2 Zones with SmartZone
- CIT302DX1  
30cm Auxiliary Teppanyaki Hob, 2 Zones
- CIT392DX1  
39cm Auxiliary Teppanyaki Hob, 2 Zones

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://fisherpaykel.com)

PRODUCT OVERVIEW CONTINUED

AUXILIARY MODULAR VENTILATION

No user interface. Controlled via paired primary hob.

CD13DB1 (Black), CD13DG1 (Grey)\*

13cm Modular Auxiliary Downdraft Extractor, 300x70

CD13DB2 (Black), CD13DG2 (Grey)\*

13cm Modular Auxiliary Downdraft Extractor, 222x89

\* Please contact the Fisher & Paykel design support team [designsupport@fisherpaykel.com](mailto:designsupport@fisherpaykel.com) for Modular Auxiliary Downdraft product availability.

ACCESSORIES

WTSC1

Wireless Temperature Sensor (1x included per Primary Induction Cob. Also available to purchase separately).



KRCID834

Recirculation Kit

Ducting

A full range of ducting components are available (1x set included per Modular Auxiliary Downdraft, see data sheet for component list. Also available to purchase separately)

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://fisherpaykel.com)





39CM PRIMARY INDUCTION HOB, 2 ZONES WITH SMARTZONE

Model no:  
**CI392DTTB1** Black  
**CI392DTTG1** Grey

| Dimensions    | W x D x H       |
|---------------|-----------------|
| Product       | 385 x 530 x 62  |
| Glass         | 385 x 530 x 6   |
| Cutout, proud | 347 x 507       |
| Cutout, flush | 347 x 509       |
| Recess, flush | 389 x 534 x 6.5 |

| Power Requirements |                                |
|--------------------|--------------------------------|
| Supply             | 220-240 V, 50 Hz / 60 Hz       |
| Service            | 16 A                           |
| Connection         | Power cord, stripped ends, 1 N |
| Power Cable        | 1700 mm                        |

|        |      |
|--------|------|
| Weight | 8 kg |
|--------|------|

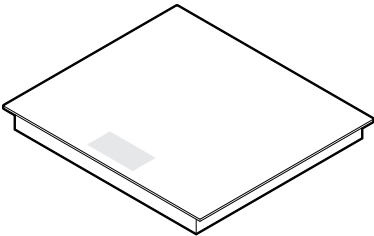



60CM PRIMARY INDUCTION HOB, 4 ZONES WITH SMARTZONE

Model no:  
**CI604DTTB1** Black  
**CI604DTTG1** Grey

| Dimensions    | W x D x H       |
|---------------|-----------------|
| Product       | 600 x 530 x 62  |
| Glass         | 600 x 530 x 6   |
| Cutout, proud | 562 x 507       |
| Cutout, flush | 562 x 509       |
| Recess, flush | 604 x 534 x 6.5 |

| Power Requirements |                            |
|--------------------|----------------------------|
| Supply             | 220-240 V, 50 Hz / 60 Hz   |
| Service            | 32 A                       |
| Connection         | Terminal block, 1 N or 2 N |
| Power Cable        | not supplied               |

|        |       |
|--------|-------|
| Weight | 14 kg |
|--------|-------|

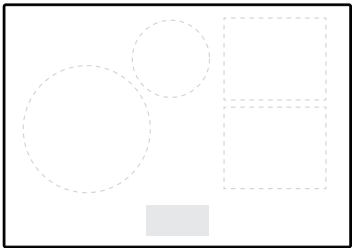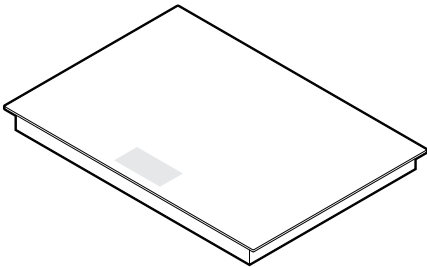



76CM PRIMARY INDUCTION HOB, 4 ZONES WITH SMARTZONE

Model no:  
**CI764DTTB1** Black  
**CI764DTTG1** Grey

| Dimensions    | W x D x H       |
|---------------|-----------------|
| Product       | 760 x 530 x 62  |
| Glass         | 760 x 530 x 6   |
| Cutout, proud | 722 x 507       |
| Cutout, flush | 722 x 509       |
| Recess, flush | 764 x 534 x 6.5 |

| Power Requirements |                            |
|--------------------|----------------------------|
| Supply             | 220-240 V, 50 Hz / 60 Hz   |
| Service            | 32 A                       |
| Connection         | Terminal block, 1 N or 2 N |
| Power Cable        | not supplied               |

|        |       |
|--------|-------|
| Weight | 16 kg |
|--------|-------|

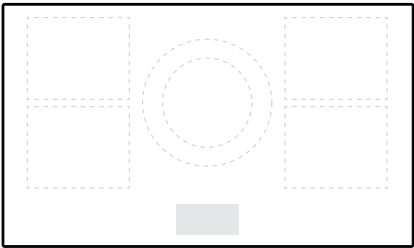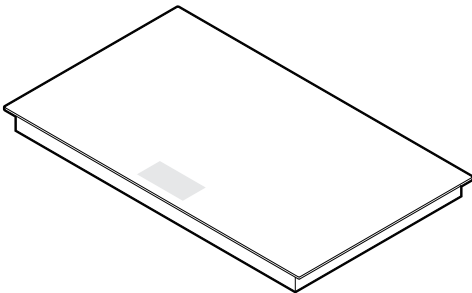

90CM PRIMARY INDUCTION HOB, 5 ZONES WITH SMARTZONE



Model no:  
**CI905DTTB1** Black  
**CI905DTTG1** Grey

| Dimensions    | W x D x H       |
|---------------|-----------------|
| Product       | 900 x 530 x 62  |
| Glass         | 900 x 530 x 6   |
| Cutout, proud | 862 x 507       |
| Cutout, flush | 862 x 509       |
| Recess, flush | 904 x 534 x 6.5 |

| Power Requirements |                            |
|--------------------|----------------------------|
| Supply             | 220-240 V, 50 Hz / 60 Hz   |
| Service            | 48 A                       |
| Connection         | Terminal block, 1 N or 3 N |
| Power Cable        | not supplied               |

|        |       |
|--------|-------|
| Weight | 20 kg |
|--------|-------|

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com



30CM AUXILIARY INDUCTION HOB, 2 ZONES WITH SMARTZONE



Model no:  
**CI302DB1** Black  
**CI302DG1** Grey



| Dimensions    | W x D x H       |
|---------------|-----------------|
| Product       | 300 x 530 x 62  |
| Glass         | 300 x 530 x 6   |
| Cutout, proud | 262 x 507       |
| Cutout, flush | 262 x 509       |
| Recess, flush | 304 x 534 x 6.5 |

| Power Requirements |                                |
|--------------------|--------------------------------|
| Supply             | 220-240 V, 50 Hz / 60 Hz       |
| Service            | 16 A                           |
| Connection         | Power cord, stripped ends, 1 N |
| Power Cable        | 1700 mm                        |

|        |      |
|--------|------|
| Weight | 7 kg |
|--------|------|



30CM AUXILIARY TEPPANYAKI HOB, 2 ZONES



Model no:  
**CIT302DX1**



| Dimensions    | W x D x H       |
|---------------|-----------------|
| Product       | 300 x 530 x 74  |
| Plate         | 300 x 530 x 6   |
| Cutout, proud | 262 x 507       |
| Cutout, flush | 262 x 509       |
| Recess, flush | 304 x 534 x 6.5 |

| Power Requirements |                                |
|--------------------|--------------------------------|
| Supply             | 220-240 V, 50 Hz / 60 Hz       |
| Service            | 12 A                           |
| Connection         | Power cord, stripped ends, 1 N |
| Power Cable        | 1700 mm                        |

|        |       |
|--------|-------|
| Weight | 12 kg |
|--------|-------|



39CM AUXILIARY INDUCTION HOB, 2 ZONES WITH SMARTZONE



Model no:  
**CI392DB1** Black  
**CI392DG1** Grey



| Dimensions    | W x D x H       |
|---------------|-----------------|
| Product       | 385 x 530 x 62  |
| Glass         | 385 x 530 x 6   |
| Cutout, proud | 347 x 507       |
| Cutout, flush | 347 x 509       |
| Recess, flush | 389 x 534 x 6.5 |

| Power Requirements |                                |
|--------------------|--------------------------------|
| Supply             | 220-240 V, 50 Hz / 60 Hz       |
| Service            | 16 A                           |
| Connection         | Power cord, stripped ends, 1 N |
| Power Cable        | 1700 mm                        |

|        |      |
|--------|------|
| Weight | 8 kg |
|--------|------|



39CM AUXILIARY TEPPANYAKI HOB 2 ZONES

Model no:  
**CIT392DX1**




| Dimensions    | W x D x H       |
|---------------|-----------------|
| Product       | 385 x 530 x 74  |
| Plate         | 385 x 530 x 6   |
| Cutout, proud | 347 x 507       |
| Cutout, flush | 347 x 509       |
| Recess, flush | 389 x 534 x 6.5 |

| Power Requirements |                                |
|--------------------|--------------------------------|
| Supply             | 220-240 V, 50 Hz / 60 Hz       |
| Service            | 12 A                           |
| Connection         | Power cord, stripped ends, 1 N |
| Power Cable        | 1700 mm                        |

|        |       |
|--------|-------|
| Weight | 15 kg |
|--------|-------|

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://fisherpaykel.com)



CHECK  
AVAILABILITY

13CM MODULAR AUXILIARY DOWNDRAFT EXTRACTOR, 300X70

Model no:

CD13DB1 Black

CD13DG1 Grey



| Dimensions      | W x D x H       |
|-----------------|-----------------|
| Product         | 130 x 530 x 186 |
| Glass           | 130 x 530 x 6   |
| Cutout, proud** | 98 x 507        |
| Cutout, flush** | 98 x 509        |
| Recess, flush** | 134 x 534 x 6.5 |



Power Requirements

|             |                  |
|-------------|------------------|
| Supply      | 220-240 V, 50 Hz |
| Service     | 5 A              |
| Connection  | Power cord, plug |
| Power Cable | 3000 mm          |

|        |     |
|--------|-----|
| Weight | 3kg |
|--------|-----|

|         |          |
|---------|----------|
| Ducting | 300 x 70 |
|---------|----------|

\*\* Must be installed in combined cutout with Hob



CHECK  
AVAILABILITY

13CM MODULAR AUXILIARY DOWNDRAFT EXTRACTOR, 222X89

Model no:

CD13DB2 Black

CD13DG2 Grey



| Dimensions      | W x D x H       |
|-----------------|-----------------|
| Product         | 130 x 530 x 186 |
| Glass           | 130 x 530 x 6   |
| Cutout, proud** | 98 x 507        |
| Cutout, flush** | 98 x 509        |
| Recess, flush** | 134 x 534 x 6.5 |

Power Requirements

|             |                  |
|-------------|------------------|
| Supply      | 220-240 V, 50 Hz |
| Service     | 5 A              |
| Connection  | Power cord, plug |
| Power Cable | 3000 mm          |

|        |     |
|--------|-----|
| Weight | 3kg |
|--------|-----|

|         |          |
|---------|----------|
| Ducting | 222 x 89 |
|---------|----------|

\*\* Must be installed in combined cutout with Hob

ELECTRICAL SERVICE FOR MULTIPLE  
PRODUCT INSTALLS


Where multiple products are being installed together, it is possible to use a smaller local distribution board, rather than running multiple separate lines. For example, 2 x 15A modules can be connected via a single 30A breaker. These cooktops must only be connected to the mains power supply by a suitably qualified person.

PRODUCT AVAILABILITY

Please contact the Fisher & Paykel design support team  
[designsupport@fisherpaykel.com](mailto:designsupport@fisherpaykel.com)  
for Auxiliary Modular Downdraft Extractor model availability.

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](http://fisherpaykel.com)

## DATA SHEETS

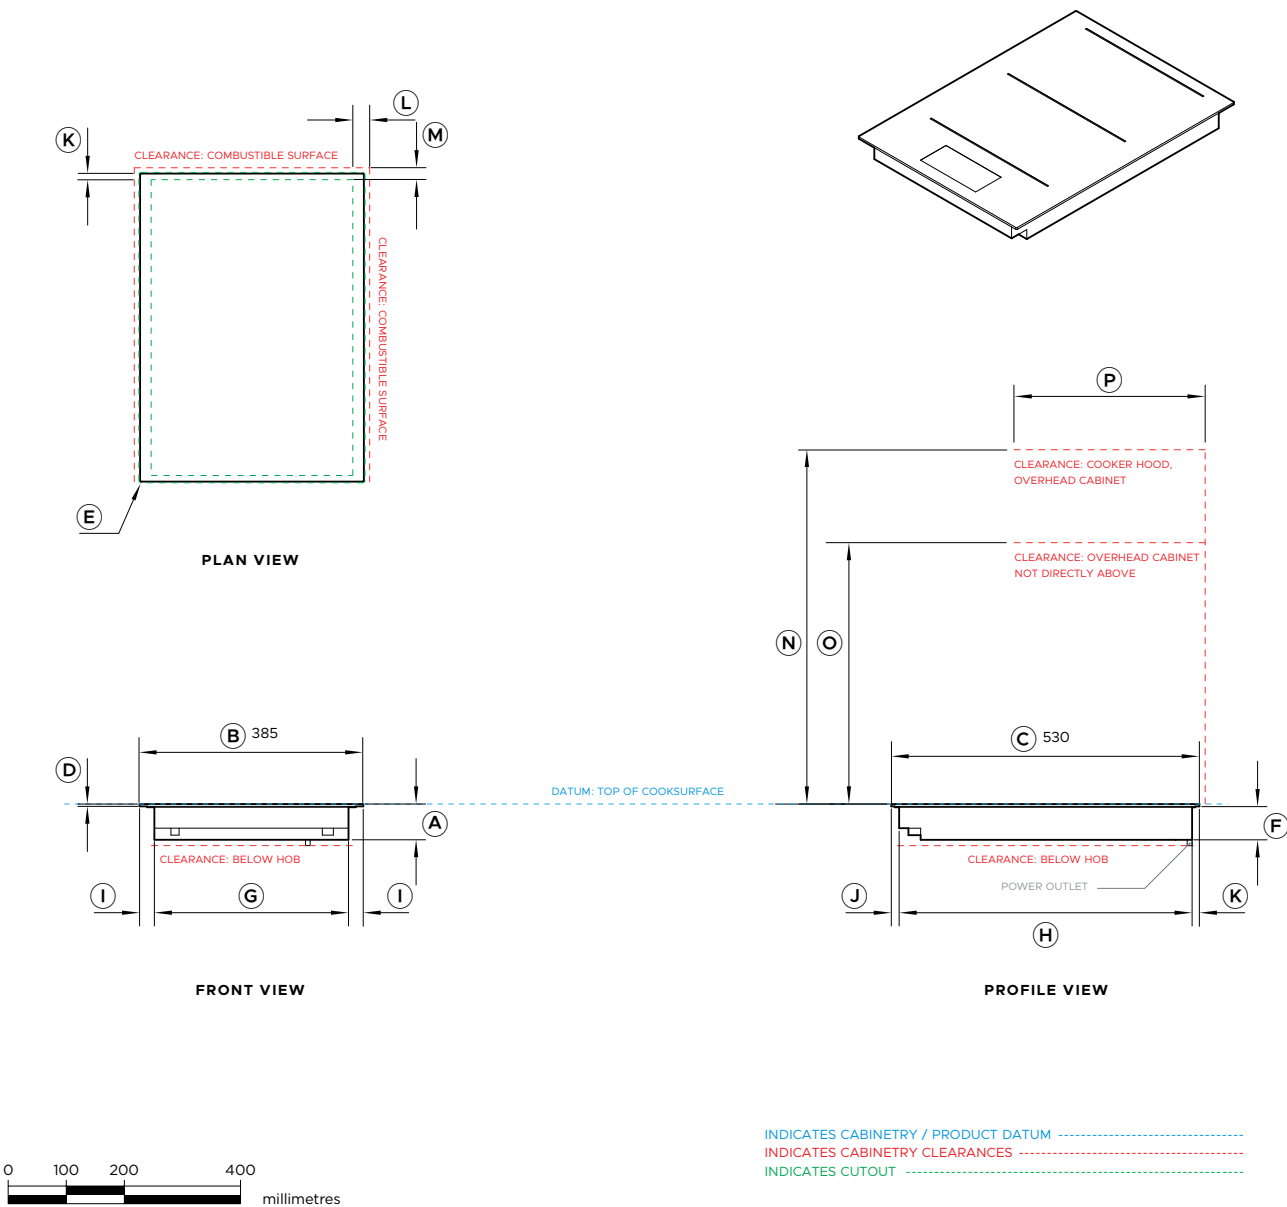

**Model no:**  
39cm Primary Induction Hob, 2 Zones with SmartZone, Black - CI392DTTB1,  
39cm Primary Induction Hob, 2 Zones with SmartZone, Grey - CI392DTTG1

| Product Dimensions |                                                | mm   |
|--------------------|------------------------------------------------|------|
| A                  | Overall height of Hob                          | 62   |
| B                  | Overall width of Hob                           | 385  |
| C                  | Overall depth of Hob                           | 530  |
| D                  | Height of Hob glass (includes flange and tape) | 6    |
| E                  | Corner radius of glass                         | 2    |
| F                  | Height of chassis                              | 56   |
| G                  | Width of chassis                               | 334  |
| H                  | Depth of chassis                               | 504  |
| I                  | Width from side edges of Hob to chassis        | 25.5 |
| J                  | Depth from front edge of Hob to chassis        | 13.5 |
| K                  | Depth from back edge of Hob to chassis         | 12.5 |


| Product Clearances                                                                                       |                                                                                | mm  |
|----------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------|-----|
| L                                                                                                        | Minimum clearance from side edges of cutout to nearest combustable surface     | 29  |
| M                                                                                                        | Minimum clearance from rear edge of cutout to nearest combustable surface      | 21  |
| N                                                                                                        | Minimum clearance from cook surface to cooker hood or overhead cabinet         | 610 |
| O                                                                                                        | Minimum clearance from cook surface to overhead cabinet not directly above Hob | 450 |
| P                                                                                                        | Maximum depth of overhead cabinetry                                            | 330 |
| Minimum ventilation gap between bottom of benchtop and top of cabinetry fronts (not shown)               |                                                                                | 4   |
| Minimum clearance from cook surface to top of any appliances, companion product or obstruction below Hob |                                                                                | 72  |

NOTE: The oven installed below the Hob MUST have a cooling fan. It is important that the induction Hob receives adequate air supply. For ventilation requirements please refer to the installation manual.


| Cutout Dimensions*       | Proud mm | Flush mm |
|--------------------------|----------|----------|
| Overall width of cutout  | 347      | 347      |
| Overall depth of cutout  | 507      | 509      |
| Overall width of recess  | -        | 389      |
| Overall depth of recess  | -        | 534      |
| Overall height of recess | -        | 6.5      |
| Recess corner radius     | -        | 4        |

\*Note cutout position is centred to the Hob.


IMPORTANT NOTE: Throughout this guide, dimensions may vary by  $\pm 2\text{mm}$  (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit [fisherpaykel.com](https://fisherpaykel.com)

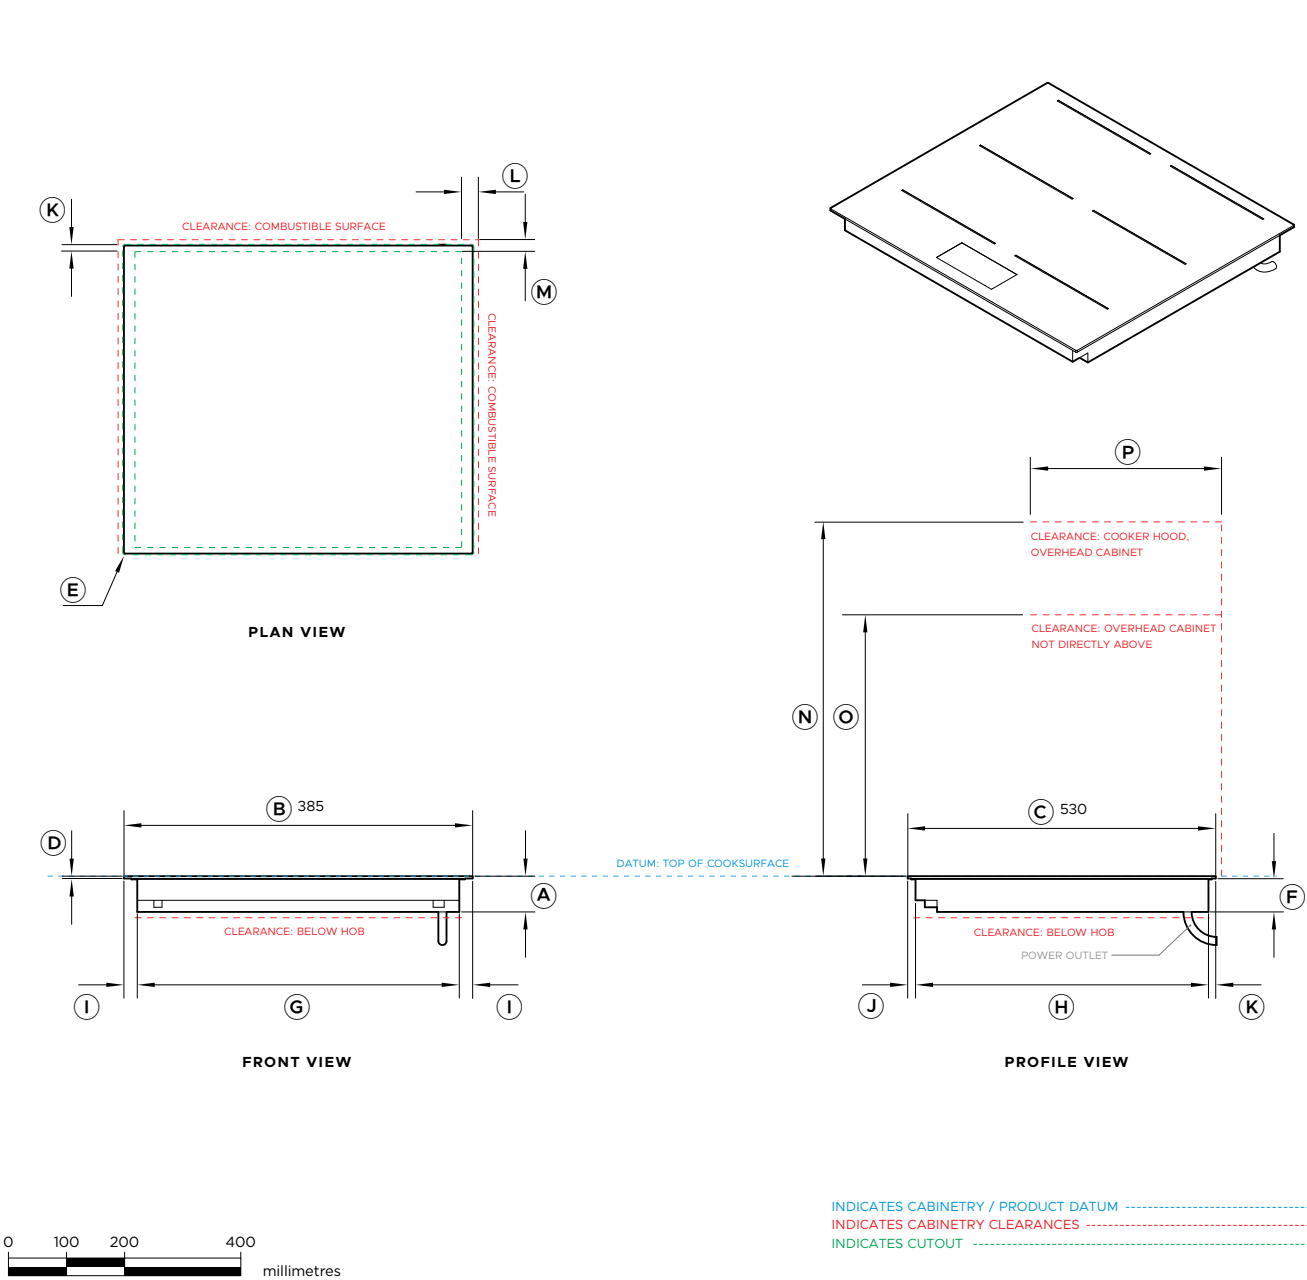


|                                                                                                                                                                                                                                                                                       |                                                                                |                 |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------|-----------------|
| <b>Model no:</b><br>60cm Primary Induction Hob, 4 Zones with SmartZone, Black - CI604DTTB1,<br>60cm Primary Induction Hob, 4 Zones with SmartZone, Grey - CI604DTTG1                                                                                                                  |                                                                                |                 |
| <b>Product Dimensions</b>                                                                                                                                                                                                                                                             |                                                                                |                 |
|                                                                                                                                                                                                                                                                                       |                                                                                | <b>mm</b>       |
| <b>A</b>                                                                                                                                                                                                                                                                              | Overall height of Hob                                                          | 62              |
| <b>B</b>                                                                                                                                                                                                                                                                              | Overall width of Hob                                                           | 600             |
| <b>C</b>                                                                                                                                                                                                                                                                              | Overall depth of Hob                                                           | 530             |
| <b>D</b>                                                                                                                                                                                                                                                                              | Height of Hob glass (includes flange and tape)                                 | 6               |
| <b>E</b>                                                                                                                                                                                                                                                                              | Corner radius of glass                                                         | 2               |
| <b>F</b>                                                                                                                                                                                                                                                                              | Height of chassis                                                              | 56              |
| <b>G</b>                                                                                                                                                                                                                                                                              | Width of chassis                                                               | 554             |
| <b>H</b>                                                                                                                                                                                                                                                                              | Depth of chassis                                                               | 504             |
| <b>I</b>                                                                                                                                                                                                                                                                              | Width from side edges of Hob to chassis                                        | 23              |
| <b>J</b>                                                                                                                                                                                                                                                                              | Depth from front edge of Hob to chassis                                        | 13.5            |
| <b>K</b>                                                                                                                                                                                                                                                                              | Depth from back edge of Hob to chassis                                         | 12.5            |
| <b>Product Clearances</b>                                                                                                                                                                                                                                                             |                                                                                |                 |
|                                                                                                                                                                                                                                                                                       |                                                                                | <b>mm</b>       |
| <b>L</b>                                                                                                                                                                                                                                                                              | Minimum clearance from side edges of cutout to nearest combustible surface     | 29              |
| <b>M</b>                                                                                                                                                                                                                                                                              | Minimum clearance from rear edge of cutout to nearest combustible surface      | 21              |
| <b>N</b>                                                                                                                                                                                                                                                                              | Minimum clearance from cook surface to cooker hood or overhead cabinet         | 610             |
| <b>O</b>                                                                                                                                                                                                                                                                              | Minimum clearance from cook surface to overhead cabinet not directly above Hob | 450             |
| <b>P</b>                                                                                                                                                                                                                                                                              | Maximum depth of overhead cabinetry                                            | 330             |
| Minimum ventilation gap between bottom of benchtop and top of cabinetry fronts (not shown)                                                                                                                                                                                            |                                                                                | 4               |
| Minimum clearance from cook surface to top of any appliances, companion product or obstruction below Hob                                                                                                                                                                              |                                                                                | 72              |
| NOTE: The oven installed below the Hob MUST have a cooling fan. It is important that the induction Hob receives adequate air supply. For ventilation requirements please refer to the installation manual.                                                                            |                                                                                |                 |
| <b>Cutout Dimensions*</b>                                                                                                                                                                                                                                                             |                                                                                |                 |
|                                                                                                                                                                                                                                                                                       |                                                                                | <b>Proud mm</b> |
|                                                                                                                                                                                                                                                                                       |                                                                                | <b>Flush mm</b> |
| Overall width of cutout                                                                                                                                                                                                                                                               |                                                                                | 562             |
| Overall depth of cutout                                                                                                                                                                                                                                                               |                                                                                | 507             |
| Overall width of recess                                                                                                                                                                                                                                                               |                                                                                | -               |
| Overall depth of recess                                                                                                                                                                                                                                                               |                                                                                | -               |
| Overall height of recess                                                                                                                                                                                                                                                              |                                                                                | -               |
| Recess corner radius                                                                                                                                                                                                                                                                  |                                                                                | -               |
| *Note cutout position is centred to the Hob.                                                                                                                                                                                                                                          |                                                                                |                 |
| IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit <a href="https://fisherpaykel.com">fisherpaykel.com</a> |                                                                                |                 |

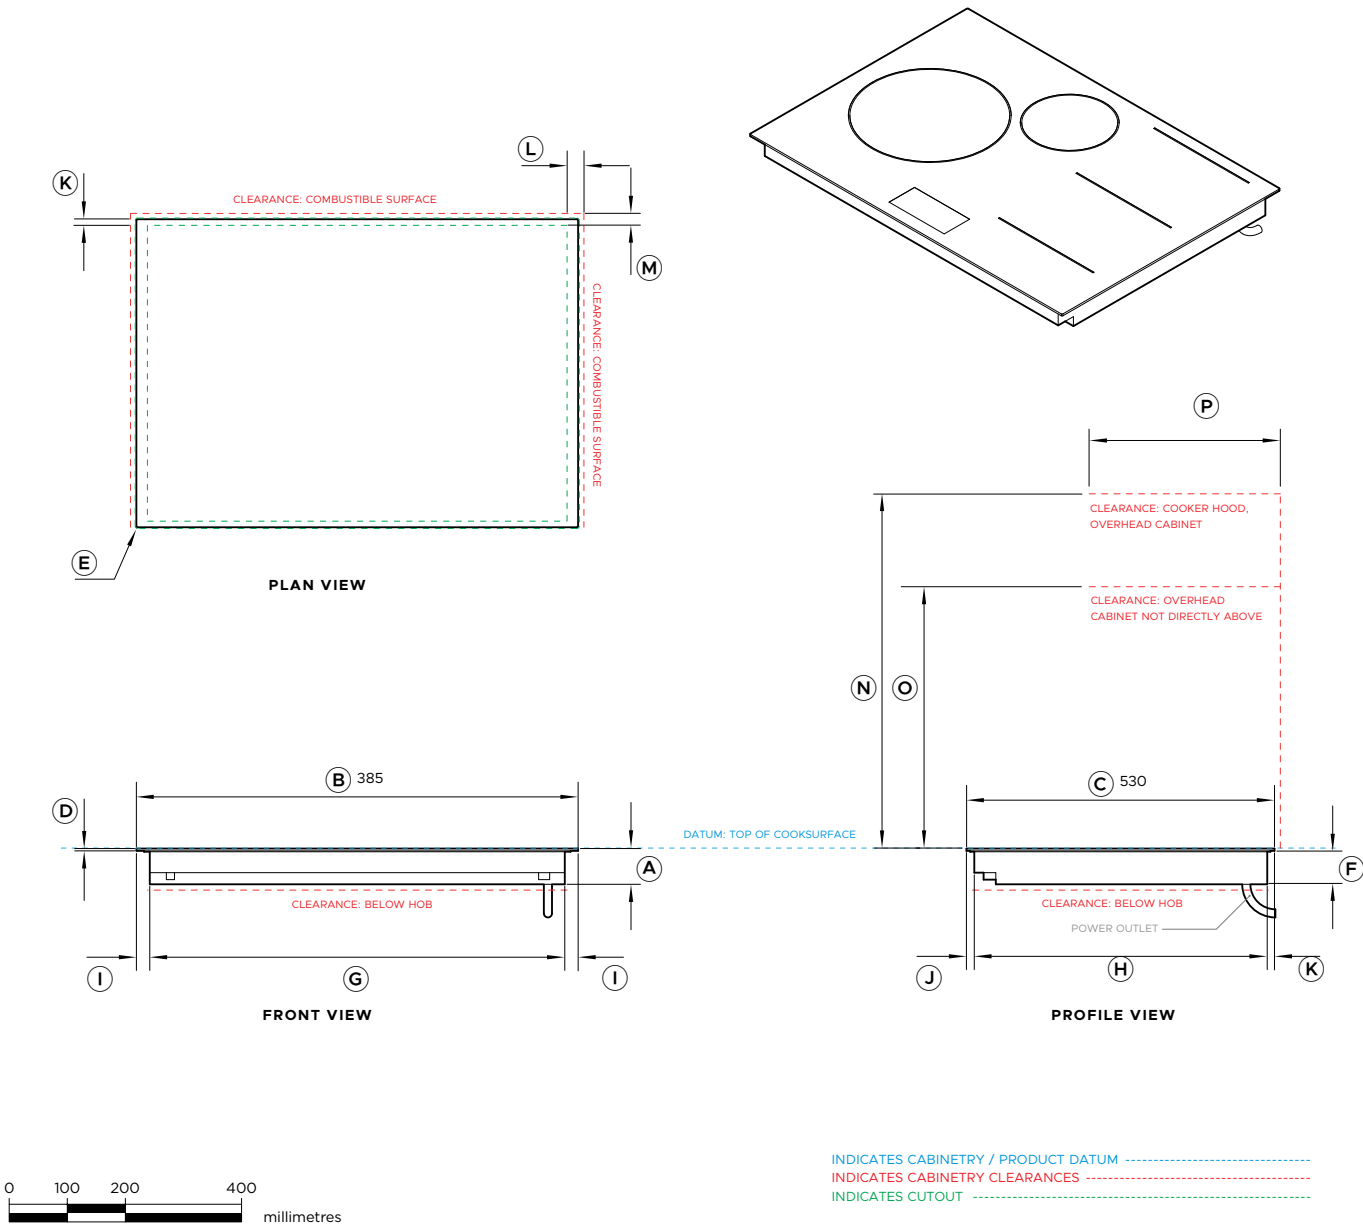


|                                                                                                                                                                                                                                                                                       |                                                                                |                                 |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------|---------------------------------|
| <b>Model no:</b><br>76cm Primary Induction Hob, 4 Zones with SmartZone, Black - CI764DTTB1,<br>76cm Primary Induction Hob, 4 Zones with SmartZone, Grey - CI764DTTG1                                                                                                                  |                                                                                |                                 |
| <b>Product Dimensions</b>                                                                                                                                                                                                                                                             |                                                                                |                                 |
| <b>A</b>                                                                                                                                                                                                                                                                              | Overall height of Hob                                                          | 62                              |
| <b>B</b>                                                                                                                                                                                                                                                                              | Overall width of Hob                                                           | 760                             |
| <b>C</b>                                                                                                                                                                                                                                                                              | Overall depth of Hob                                                           | 530                             |
| <b>D</b>                                                                                                                                                                                                                                                                              | Height of Hob glass (includes flange and tape)                                 | 6                               |
| <b>E</b>                                                                                                                                                                                                                                                                              | Corner radius of glass                                                         | 2                               |
| <b>F</b>                                                                                                                                                                                                                                                                              | Height of chassis                                                              | 56                              |
| <b>G</b>                                                                                                                                                                                                                                                                              | Width of chassis                                                               | 714                             |
| <b>H</b>                                                                                                                                                                                                                                                                              | Depth of chassis                                                               | 504                             |
| <b>I</b>                                                                                                                                                                                                                                                                              | Width from side edges of Hob to chassis                                        | 23                              |
| <b>J</b>                                                                                                                                                                                                                                                                              | Depth from front edge of Hob to chassis                                        | 13.5                            |
| <b>K</b>                                                                                                                                                                                                                                                                              | Depth from back edge of Hob to chassis                                         | 12.5                            |
| <b>Product Clearances</b>                                                                                                                                                                                                                                                             |                                                                                |                                 |
| <b>L</b>                                                                                                                                                                                                                                                                              | Minimum clearance from side edges of cutout to nearest combustible surface     | 29                              |
| <b>M</b>                                                                                                                                                                                                                                                                              | Minimum clearance from rear edge of cutout to nearest combustible surface      | 21                              |
| <b>N</b>                                                                                                                                                                                                                                                                              | Minimum clearance from cook surface to cooker hood or overhead cabinet         | 610                             |
| <b>O</b>                                                                                                                                                                                                                                                                              | Minimum clearance from cook surface to overhead cabinet not directly above Hob | 450                             |
| <b>P</b>                                                                                                                                                                                                                                                                              | Maximum depth of overhead cabinetry                                            | 330                             |
| Minimum ventilation gap between bottom of benchtop and top of cabinetry fronts (not shown)                                                                                                                                                                                            |                                                                                |                                 |
|                                                                                                                                                                                                                                                                                       |                                                                                | 4                               |
| Minimum clearance from cook surface to top of any appliances, companion product or obstruction below Hob                                                                                                                                                                              |                                                                                |                                 |
|                                                                                                                                                                                                                                                                                       |                                                                                | 72                              |
| NOTE: The oven installed below the Hob MUST have a cooling fan. It is important that the induction Hob receives adequate air supply. For ventilation requirements please refer to the installation manual.                                                                            |                                                                                |                                 |
| <b>Cutout Dimensions*</b>                                                                                                                                                                                                                                                             |                                                                                |                                 |
|                                                                                                                                                                                                                                                                                       |                                                                                | <b>Proud mm</b> <b>Flush mm</b> |
| Overall width of cutout                                                                                                                                                                                                                                                               |                                                                                | 722      722                    |
| Overall depth of cutout                                                                                                                                                                                                                                                               |                                                                                | 507      509                    |
| Overall width of recess                                                                                                                                                                                                                                                               |                                                                                | -      764                      |
| Overall depth of recess                                                                                                                                                                                                                                                               |                                                                                | -      534                      |
| Overall height of recess                                                                                                                                                                                                                                                              |                                                                                | -      6.5                      |
| Recess corner radius                                                                                                                                                                                                                                                                  |                                                                                | -      4                        |
| *Note cutout position is centred to the Hob.                                                                                                                                                                                                                                          |                                                                                |                                 |
| IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit <a href="https://fisherpaykel.com">fisherpaykel.com</a> |                                                                                |                                 |

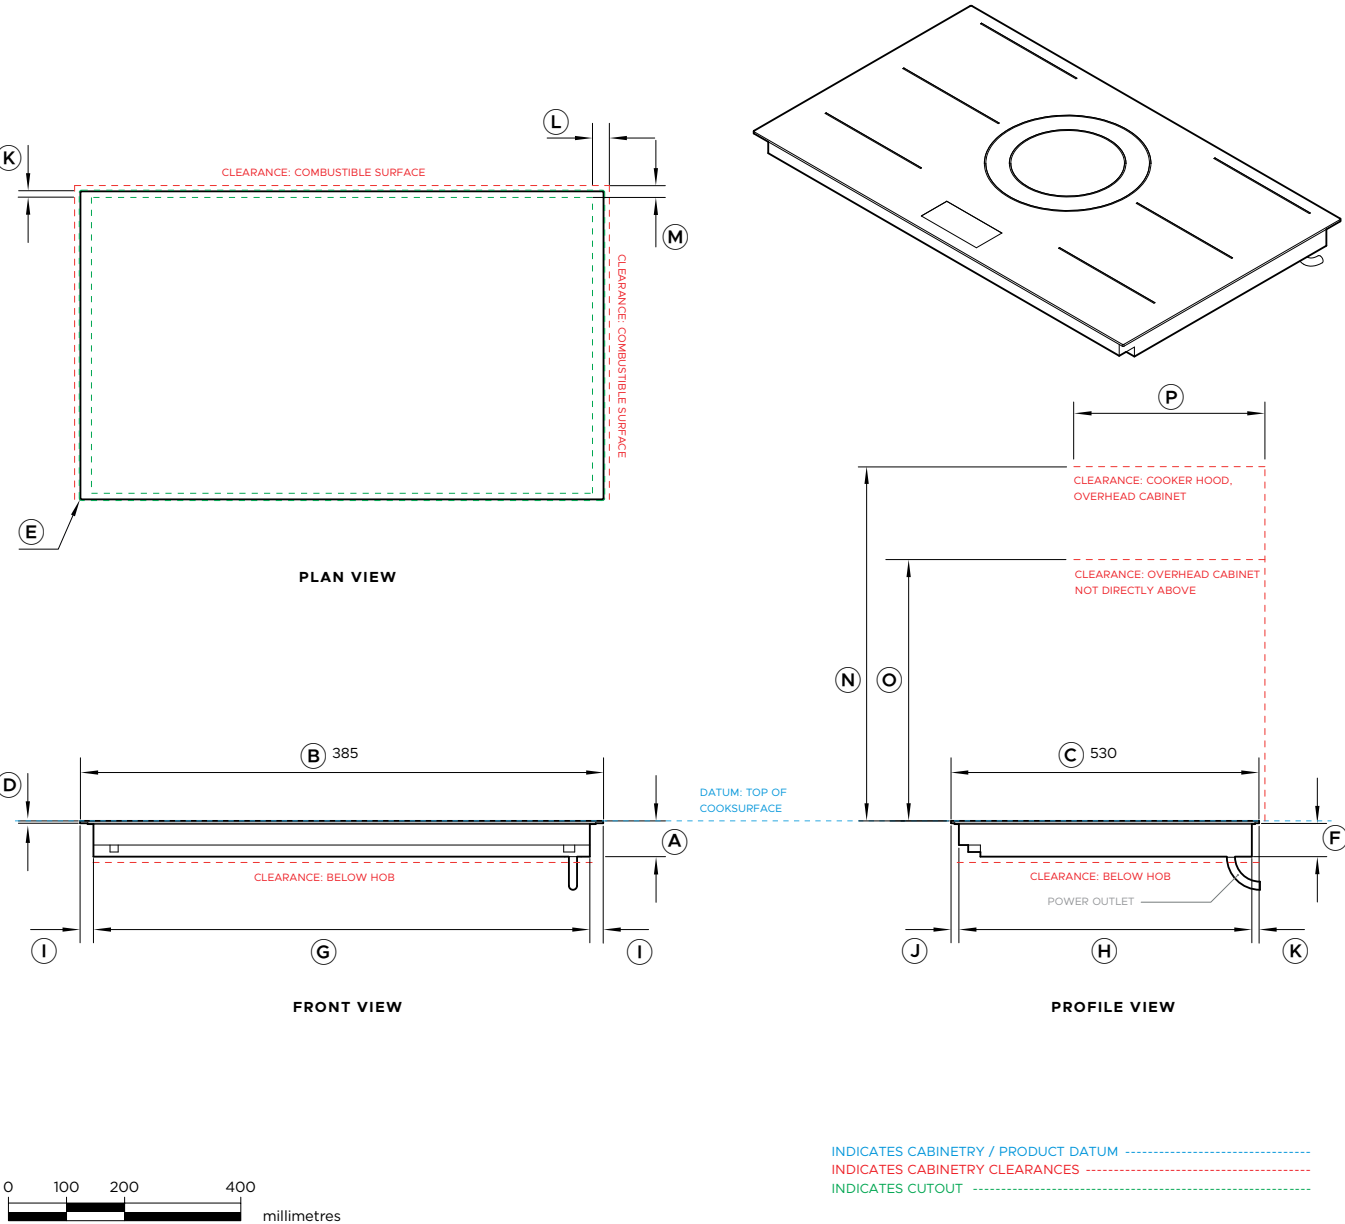



|                                                                                                                                                                                                                                                                                       |                                                                                |                                 |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------|---------------------------------|
| <b>Model no:</b>                                                                                                                                                                                                                                                                      |                                                                                |                                 |
| 90cm Primary Induction Hob, 5 Zones with SmartZone, Black - CI905DTTB1                                                                                                                                                                                                                |                                                                                |                                 |
| 90cm Primary Induction Hob, 5 Zones with SmartZone, Grey - CI905DTTG1                                                                                                                                                                                                                 |                                                                                |                                 |
| <b>Product Dimensions</b>                                                                                                                                                                                                                                                             |                                                                                |                                 |
|                                                                                                                                                                                                                                                                                       |                                                                                | <b>mm</b>                       |
| <b>A</b>                                                                                                                                                                                                                                                                              | Overall height of Hob                                                          | 62                              |
| <b>B</b>                                                                                                                                                                                                                                                                              | Overall width of Hob                                                           | 900                             |
| <b>C</b>                                                                                                                                                                                                                                                                              | Overall depth of Hob                                                           | 530                             |
| <b>D</b>                                                                                                                                                                                                                                                                              | Height of Hob glass (includes flange and tape)                                 | 6                               |
| <b>E</b>                                                                                                                                                                                                                                                                              | Corner radius of glass                                                         | 2                               |
| <b>F</b>                                                                                                                                                                                                                                                                              | Height of chassis                                                              | 56                              |
| <b>G</b>                                                                                                                                                                                                                                                                              | Width of chassis                                                               | 854                             |
| <b>H</b>                                                                                                                                                                                                                                                                              | Depth of chassis                                                               | 504                             |
| <b>I</b>                                                                                                                                                                                                                                                                              | Width from side edges of Hob to chassis                                        | 23                              |
| <b>J</b>                                                                                                                                                                                                                                                                              | Depth from front edge of Hob to chassis                                        | 13.5                            |
| <b>K</b>                                                                                                                                                                                                                                                                              | Depth from back edge of Hob to chassis                                         | 12.5                            |
| <b>Product Clearances</b>                                                                                                                                                                                                                                                             |                                                                                |                                 |
|                                                                                                                                                                                                                                                                                       |                                                                                | <b>mm</b>                       |
| <b>L</b>                                                                                                                                                                                                                                                                              | Minimum clearance from side edges of cutout to nearest combustible surface     | 29                              |
| <b>M</b>                                                                                                                                                                                                                                                                              | Minimum clearance from rear edge of cutout to nearest combustible surface      | 21                              |
| <b>N</b>                                                                                                                                                                                                                                                                              | Minimum clearance from cook surface to cooker hood or overhead cabinet         | 610                             |
| <b>O</b>                                                                                                                                                                                                                                                                              | Minimum clearance from cook surface to overhead cabinet not directly above Hob | 450                             |
| <b>P</b>                                                                                                                                                                                                                                                                              | Maximum depth of overhead cabinetry                                            | 330                             |
| Minimum ventilation gap between bottom of benchtop and top of cabinetry fronts (not shown)                                                                                                                                                                                            |                                                                                | 4                               |
| Minimum clearance from cook surface to top of any appliances, companion product or obstruction below Hob                                                                                                                                                                              |                                                                                | 72                              |
| NOTE: The oven installed below the Hob MUST have a cooling fan. It is important that the induction Hob receives adequate air supply. For ventilation requirements please refer to the installation manual.                                                                            |                                                                                |                                 |
| <b>Cutout Dimensions*</b>                                                                                                                                                                                                                                                             |                                                                                |                                 |
|                                                                                                                                                                                                                                                                                       |                                                                                | <b>Proud mm</b> <b>Flush mm</b> |
| Overall width of cutout                                                                                                                                                                                                                                                               |                                                                                | 862      862                    |
| Overall depth of cutout                                                                                                                                                                                                                                                               |                                                                                | 507      509                    |
| Overall width of recess                                                                                                                                                                                                                                                               |                                                                                | -      904                      |
| Overall depth of recess                                                                                                                                                                                                                                                               |                                                                                | -      534                      |
| Overall height of recess                                                                                                                                                                                                                                                              |                                                                                | -      6.5                      |
| Recess corner radius                                                                                                                                                                                                                                                                  |                                                                                | -      4                        |
| *Note cutout position is centred to the Hob.                                                                                                                                                                                                                                          |                                                                                |                                 |
| IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit <a href="https://fisherpaykel.com">fisherpaykel.com</a> |                                                                                |                                 |

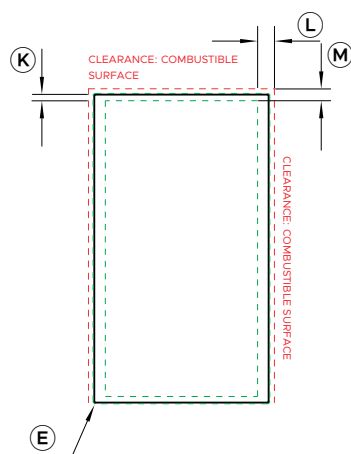

### PLAN VIEW

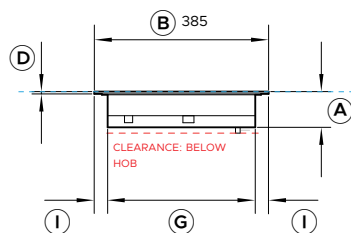

**FRONT VIEW**

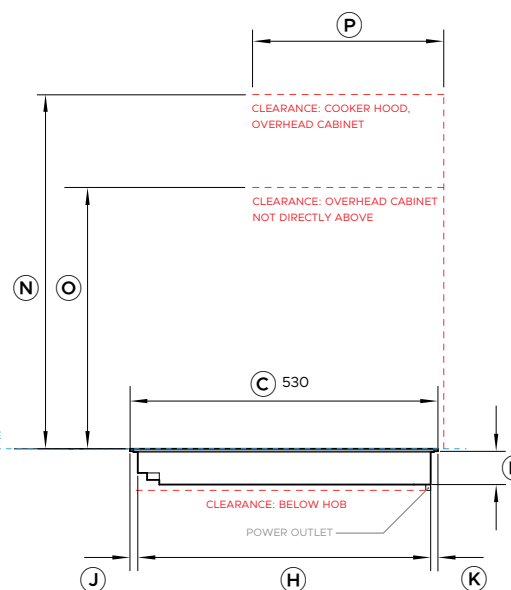

### PROFILE VIEW



INDICATES CABINETRY / PRODUCT DATUM -----

INDICATES CABINETRY CLEARANCES -----

INDICATES CUTOUT

## Model no:

30cm Auxiliary Induction Hob, 2 Zones with SmartZone, Black - CI302DB1

30cm Auxiliary Induction Hob, 2 Zones with SmartZone, Grey - CI302DG1

| Product Dimensions |                                                | mm   |
|--------------------|------------------------------------------------|------|
| <b>A</b>           | Overall height of Hob                          | 62   |
| <b>B</b>           | Overall width of Hob                           | 300  |
| <b>C</b>           | Overall depth of Hob                           | 530  |
| <b>D</b>           | Height of Hob glass (includes flange and tape) | 6    |
| <b>E</b>           | Corner radius of glass                         | 2    |
| <b>F</b>           | Height of chassis                              | 56   |
| <b>G</b>           | Width of chassis                               | 254  |
| <b>H</b>           | Depth of chassis                               | 504  |
| <b>I</b>           | Width from side edges of Hob to chassis        | 23   |
| <b>J</b>           | Depth from front edge of Hob to chassis        | 13.5 |
| <b>K</b>           | Depth from back edge of Hob to chassis         | 12.5 |


| Product Clearances                                                                                       | mm  |
|----------------------------------------------------------------------------------------------------------|-----|
| <b>L</b> Minimum clearance from side edges of cutout to nearest combustible surface                      | 29  |
| <b>M</b> Minimum clearance from rear edge of cutout to nearest combustible surface                       | 21  |
| <b>N</b> Minimum clearance from cook surface to cooker hood or overhead cabinet                          | 610 |
| <b>O</b> Minimum clearance from cook surface to overhead cabinet not directly above Hob                  | 450 |
| <b>P</b> Maximum depth of overhead cabinetry                                                             | 330 |
| Minimum ventilation gap between bottom of benchtop and top of cabinetry fronts (not shown)               | 4   |
| Minimum clearance from cook surface to top of any appliances, companion product or obstruction below Hob | 72  |

NOTE: The oven installed below the Hob MUST have a cooling fan. It is important that the induction Hob receives adequate air supply. For ventilation requirements please refer to the installation manual.

| Cutout Dimensions*       | Proud mm | Flush mm |
|--------------------------|----------|----------|
| Overall width of cutout  | 262      | 262      |
| Overall depth of cutout  | 507      | 509      |
| Overall width of recess  | -        | 304      |
| Overall depth of recess  | -        | 534      |
| Overall height of recess | -        | 6.5      |
| Recess corner radius     | -        | 4        |

\*Note cutout position is centred to the Hob.

**IMPORTANT NOTE:** Throughout this guide, dimensions may vary by  $\pm 2\text{mm}$  (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit [fisherpaykel.com](http://fisherpaykel.com)

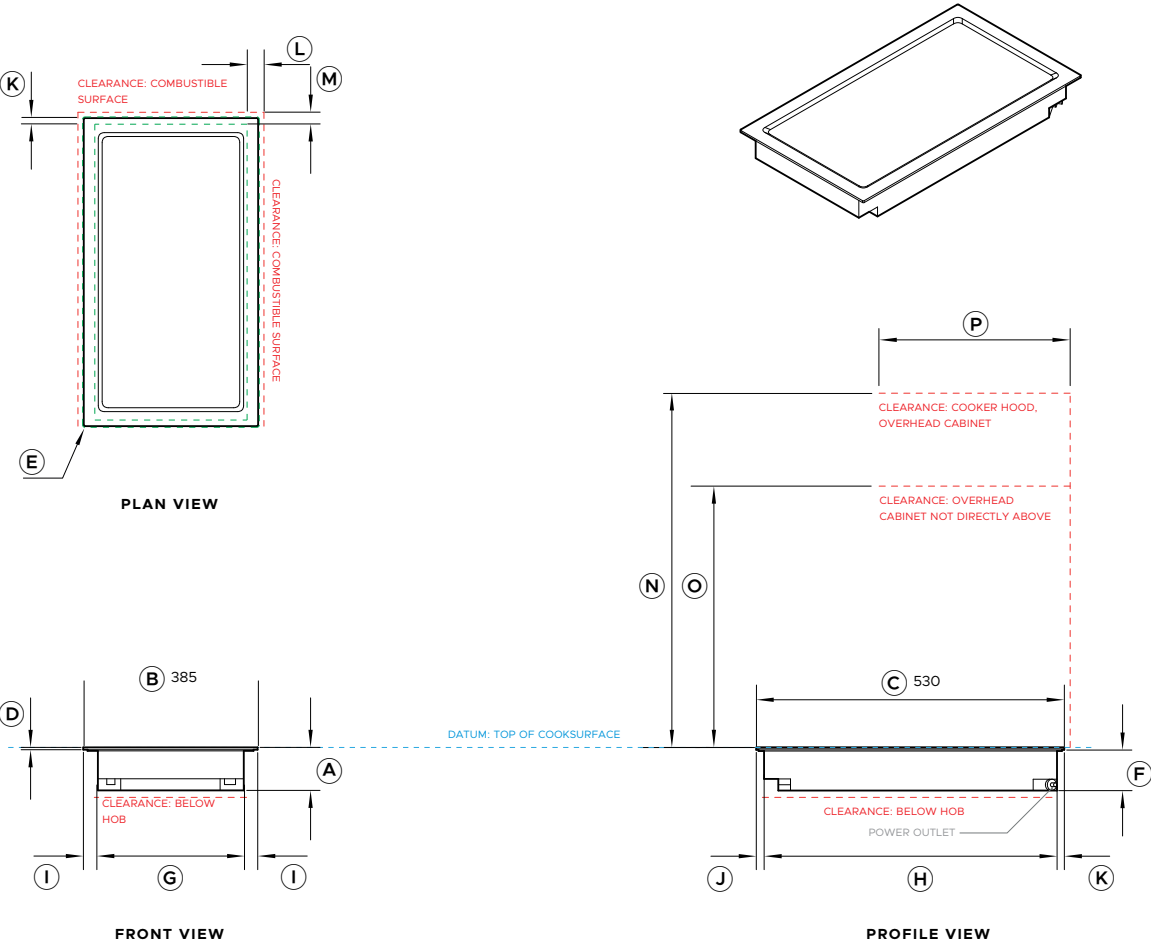

**Model no:**  
30cm Auxiliary Teppanyaki Hob, 2 Zones - CIT302DX1

| Product Dimensions                                                       | mm   |
|--------------------------------------------------------------------------|------|
| <b>A</b> Overall height of Hob                                           | 74   |
| <b>B</b> Overall width of Hob                                            | 300  |
| <b>C</b> Overall depth of Hob                                            | 530  |
| <b>D</b> Height of stainless steel cook plate (includes flange and tape) | 6    |
| <b>E</b> Corner radius of Hob surface                                    | 2    |
| <b>F</b> Height of chassis                                               | 68   |
| <b>G</b> Width of chassis                                                | 251  |
| <b>H</b> Depth of chassis                                                | 504  |
| <b>I</b> Width from side edges of Hob to chassis                         | 24.5 |
| <b>J</b> Depth from front edge of Hob to chassis                         | 13.5 |
| <b>K</b> Depth from back edge of Hob to chassis                          | 12.5 |


| Product Clearances                                                                                       | mm  |
|----------------------------------------------------------------------------------------------------------|-----|
| <b>L</b> Minimum clearance from side edges of cutout to nearest combustible surface                      | 29  |
| <b>M</b> Minimum clearance from rear edge of cutout to nearest combustible surface                       | 21  |
| <b>N</b> Minimum clearance from cook surface to cooker hood or overhead cabinet                          | 610 |
| <b>O</b> Minimum clearance from cook surface to overhead cabinet not directly above Hob                  | 450 |
| <b>P</b> Maximum depth of overhead cabinetry                                                             | 330 |
| Minimum ventilation gap between bottom of benchtop and top of cabinetry fronts (not shown)               | 4   |
| Minimum clearance from cook surface to top of any appliances, companion product or obstruction below Hob | 86  |

NOTE: The oven installed below the Hob MUST have a cooling fan. It is important that the induction Hob receives adequate air supply. For ventilation requirements please refer to the installation manual.


| Cutout Dimensions*       | Proud mm | Flush mm |
|--------------------------|----------|----------|
| Overall width of cutout  | 262      | 262      |
| Overall depth of cutout  | 507      | 509      |
| Overall width of recess  | -        | 304      |
| Overall depth of recess  | -        | 534      |
| Overall height of recess | -        | 6.5      |
| Recess corner radius     | -        | 4        |

\*Note cutout position is centred to the Hob.



IMPORTANT NOTE: Throughout this guide, dimensions may vary by  $\pm 2\text{mm}$  (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit [fisherpaykel.com](https://fisherpaykel.com)

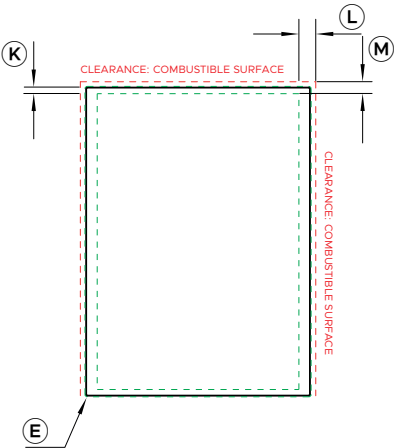

PLAN VIEW

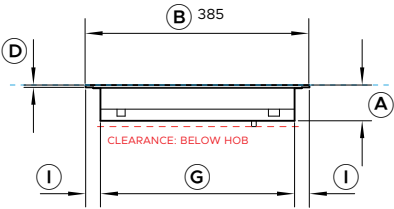

FRONT VIEW

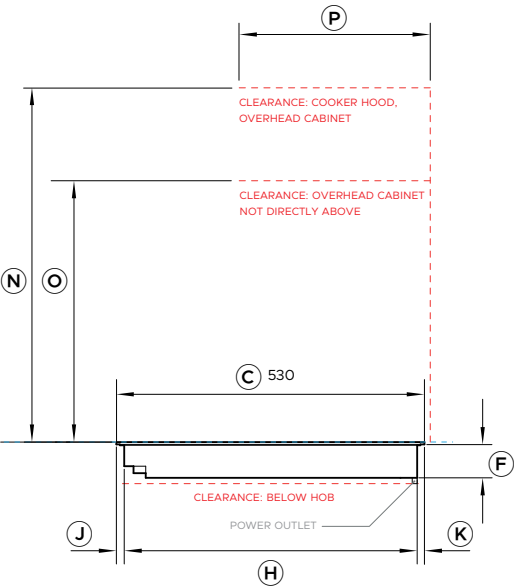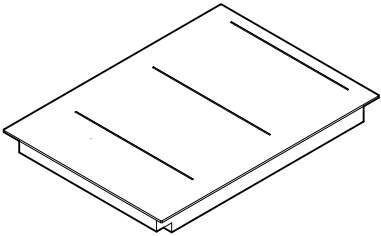

PROFILE VIEW



INDICATES CABINETRY / PRODUCT DATUM  
INDICATES CABINETRY CLEARANCES  
INDICATES CUTOUT

Model no:

39cm Auxiliary Induction Hob, 2 Zones with SmartZone, Black - CI392DB1  
39cm Auxiliary Induction Hob, 2 Zones with SmartZone, Grey - CI392DG1

| Product Dimensions                               | mm   |
|--------------------------------------------------|------|
| A Overall height of Hob                          | 62   |
| B Overall width of Hob                           | 385  |
| C Overall depth of Hob                           | 530  |
| D Height of Hob glass (includes flange and tape) | 6    |
| E Corner radius of glass                         | 2    |
| F Height of chassis                              | 56   |
| G Width of chassis                               | 334  |
| H Depth of chassis                               | 504  |
| I Width from side edges of Hob to chassis        | 25.5 |
| J Depth from front edge of Hob to chassis        | 13.5 |
| K Depth from back edge of Hob to chassis         | 12.5 |


| Product Clearances                                                                                       | mm  |
|----------------------------------------------------------------------------------------------------------|-----|
| L Minimum clearance from side edges of cutout to nearest combustible surface                             | 29  |
| M Minimum clearance from rear edge of cutout to nearest combustible surface                              | 21  |
| N Minimum clearance from cook surface to cooker hood or overhead cabinet                                 | 610 |
| O Minimum clearance from cook surface to overhead cabinet not directly above Hob                         | 450 |
| P Maximum depth of overhead cabinetry                                                                    | 330 |
| Minimum ventilation gap between bottom of benchtop and top of cabinetry fronts (not shown)               | 4   |
| Minimum clearance from cook surface to top of any appliances, companion product or obstruction below Hob | 72  |

NOTE: The oven installed below the Hob MUST have a cooling fan. It is important that the induction Hob receives adequate air supply. For ventilation requirements please refer to the installation manual.

| Cutout Dimensions*       | Proud mm | Flush mm |
|--------------------------|----------|----------|
| Overall width of cutout  | 347      | 347      |
| Overall depth of cutout  | 507      | 509      |
| Overall width of recess  | -        | 389      |
| Overall depth of recess  | -        | 534      |
| Overall height of recess | -        | 6.5      |
| Recess corner radius     | -        | 4        |

\*Note cutout position is centred to the Hob.

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit [fisherpaykel.com](https://fisherpaykel.com)

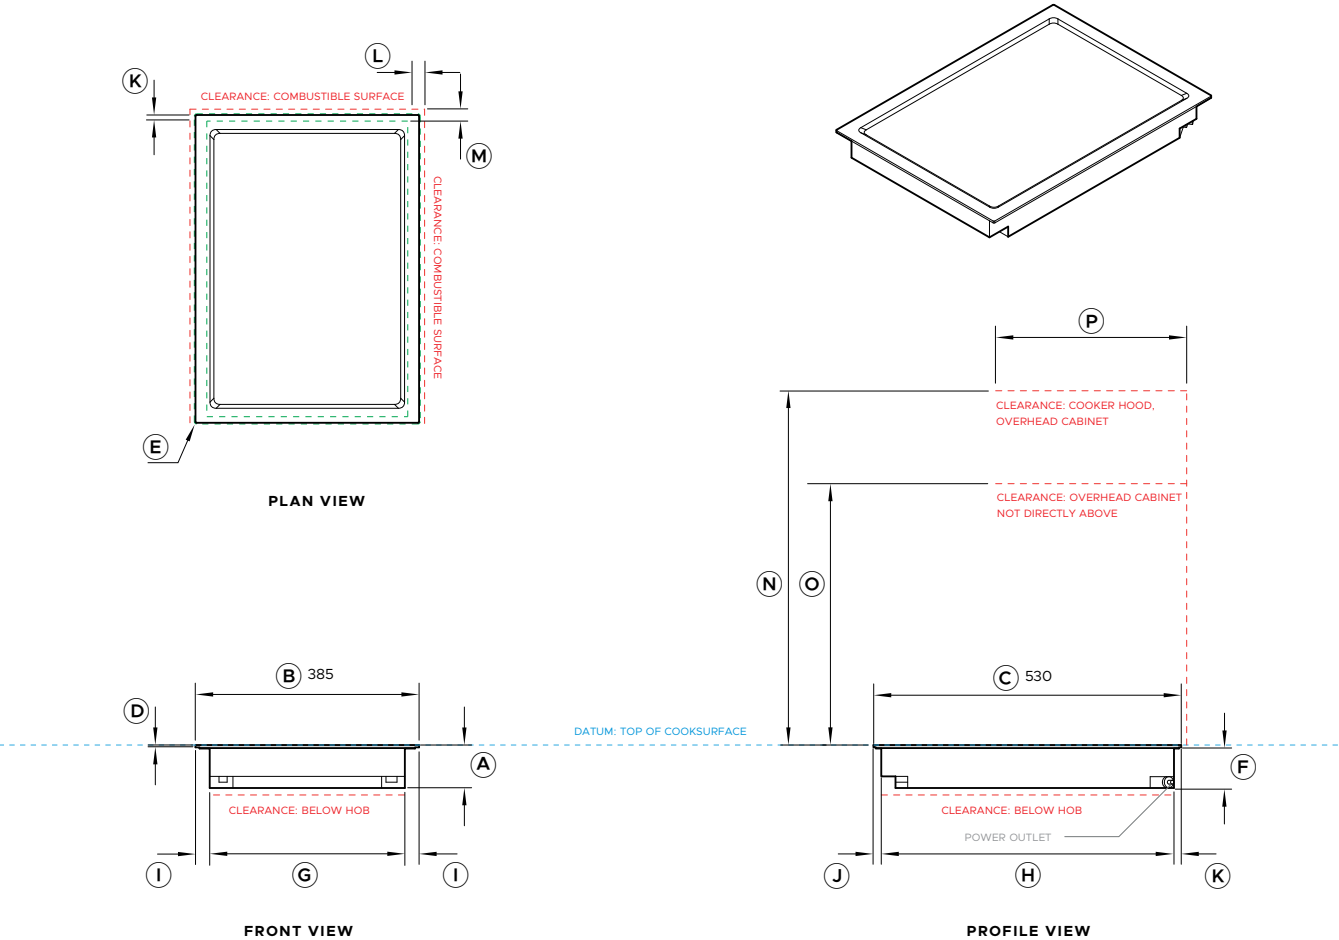

**Model no:**  
39cm Auxiliary Teppanyaki Hob, 2 Zones - CIT392DBX1

| Product Dimensions                                                       | mm   |
|--------------------------------------------------------------------------|------|
| <b>A</b> Overall height of Hob                                           | 74   |
| <b>B</b> Overall width of Hob                                            | 385  |
| <b>C</b> Overall depth of Hob                                            | 530  |
| <b>D</b> Height of stainless steel cook plate (includes flange and tape) | 6    |
| <b>E</b> Radius of the corner                                            | 2    |
| <b>F</b> Height of chassis                                               | 68   |
| <b>G</b> Width of chassis                                                | 336  |
| <b>H</b> Depth of chassis                                                | 504  |
| <b>I</b> Width from side edges of Hob to chassis                         | 24.5 |
| <b>J</b> Depth from front edge of Hob to chassis                         | 13.5 |
| <b>K</b> Depth from back edge of Hob to chassis                          | 12.5 |

| Product Clearances                                                                                       | mm  |
|----------------------------------------------------------------------------------------------------------|-----|
| <b>L</b> Minimum clearance from side edges of cutout to nearest combustible surface                      | 29  |
| <b>M</b> Minimum clearance from rear edge of cutout to nearest combustible surface                       | 21  |
| <b>N</b> Minimum clearance from cook surface to cooker hood or overhead cabinet                          | 610 |
| <b>O</b> Minimum clearance from cook surface to overhead cabinet not directly above Hob                  | 450 |
| <b>P</b> Maximum depth of overhead cabinetry                                                             | 330 |
| Minimum ventilation gap between bottom of benchtop and top of cabinetry fronts (not shown)               | 4   |
| Minimum clearance from cook surface to top of any appliances, companion product or obstruction below Hob | 86  |

NOTE: The oven installed below the Hob MUST have a cooling fan. It is important that the teppanyaki Hob receives adequate air supply. For ventilation requirements please refer to page


| Cutout Dimensions*       | Proud mm | Flush mm |
|--------------------------|----------|----------|
| Overall width of cutout  | 347      | 347      |
| Overall depth of cutout  | 507      | 509      |
| Overall width of recess  | -        | 389      |
| Overall depth of recess  | -        | 534      |
| Overall height of recess | -        | 6.5      |
| Recess corner radius     | -        | 4        |


\*Note cutout position is centred to the Hob.

IMPORTANT NOTE: Throughout this guide, dimensions may vary by  $\pm 2\text{mm}$  (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit [fisherpaykel.com](https://fisherpaykel.com)


The Modular Auxiliary Downdraft models shown in this Planning Guide may not be available and are subject to change at any time. For product availability, design planning and installation support please contact the Fisher & Paykel design support team. [designsupport@fisherpaykel.com](mailto:designsupport@fisherpaykel.com)

| Ducting Component                                                                                                                   | Optional Accessory Part No. |
|-------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|
|  Horizontal Elbow 90°, 300x70                      | E90H30X7                    |
|  Vertical Elbow 90°, 300x70                        | E90V30X7                    |
|  Straight Adaptor, 300x70 Rectangular to 150 Round | DA30X7D15                   |
|  Adaptor 90°, 300x70 Rectangular to 150 Round      | DA90D30X7D15                |
|  Connector, 300x70                                 | C30X7                       |
|  Duct 1m, 300x70                                   | D100X30X7                   |
|  Duct 90° Bend Horizontal, 222x89                  | E90H222X89                  |
|  Duct 90° Bend Vertical, 222x89                    | E90V222X89                  |
|  Duct Adaptor Straight, 222x89 to 150 Round        | DA222X89D150                |
|  Duct Adaptor 90°, 222x89 to 150 Round             | DA90D222X89D150             |
|  Duct Joiner Flexi, 222x89                         | C222X89                     |
|  Duct Straight Length 1m, 222x89                   | D1000X222X89                |
|  Horizontal Elbow 90°, 300x70, Steel               | E90H30X7S                   |
|  Mainbox Outlet Adaptor, 222x89                    | OAD222X89                   |
|  Blower Outlet Adaptor, 300x70                   | OAB300X70                   |
|  Blower Outlet Adaptor, 222x89                   | OAB222X89                   |
|  Recirculation Kit                               | KRCID834                    |
|  Outlet Grille, 222x89mm                         | DO-G-SS                     |
|  Duct 90° Vertical, Round 150                    | E90V150                     |
|  Duct Joiner Flexi, Round 150                    | C150                        |
|  Duct Straight Length 1m, Round 150              | D1000X150                   |


| <br>CD13DB1 CD13DG1<br>13CM MODULAR AUXILIARY DOWNDRAFT, 300x70 DUCTING |                                                            |
|------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------|
| Supplied                                                                                                                                                   | Optional accessory                                         |
| x1                                                                                                                                                         | Yes.                                                       |
| x2                                                                                                                                                         | Yes.                                                       |
| x1                                                                                                                                                         | Yes.                                                       |
| x1                                                                                                                                                         | Yes.                                                       |
| x1                                                                                                                                                         | Yes.                                                       |
| x1                                                                                                                                                         | Yes.                                                       |
| x1                                                                                                                                                         | Yes.                                                       |
| -                                                                                                                                                          | Yes. Adapter required.                                     |
| -                                                                                                                                                          | Yes. Adapter required.                                     |
| -                                                                                                                                                          | Yes. Adapter required.                                     |
| -                                                                                                                                                          | Yes. Adapter required.                                     |
| -                                                                                                                                                          | Yes. Adapter required.                                     |
| -                                                                                                                                                          | Yes. Adapter required.                                     |
| -                                                                                                                                                          | Yes. Adapter required.                                     |
| -                                                                                                                                                          | Yes. For use under pyrolytic oven.                         |
| -                                                                                                                                                          | Yes. Required for 222x89 ducting.                          |
| Supplied on blowerbox.                                                                                                                                     | -                                                          |
| -                                                                                                                                                          | Yes. Required for Recirculation kit and/or 222x89 ducting. |
| -                                                                                                                                                          | Yes. Blowerbox Outlet Adapter 222x89 is required.          |
| -                                                                                                                                                          | Yes. Adapter required.                                     |
| -                                                                                                                                                          | Yes.                                                       |
| -                                                                                                                                                          | Yes.                                                       |
| -                                                                                                                                                          | Yes.                                                       |
| -                                                                                                                                                          | Yes.                                                       |

| <br>CD13DB2 CD13DG2<br>13CM MODULAR AUXILIARY DOWNDRAFT, 222x89 DUCTING |                                     |
|------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|
| Supplied                                                                                                                                                   | Optional accessory                  |
| -                                                                                                                                                          | Yes. Adapter required.              |
| -                                                                                                                                                          | Yes. Adapter required.              |
| -                                                                                                                                                          | Yes. Adapter required.              |
| -                                                                                                                                                          | Yes. Adapter required.              |
| -                                                                                                                                                          | Yes. Adapter required.              |
| -                                                                                                                                                          | Yes. Adapter required.              |
| -                                                                                                                                                          | Yes. Adapter required.              |
| x1                                                                                                                                                         | Yes.                                |
| x2                                                                                                                                                         | Yes.                                |
| x1                                                                                                                                                         | Yes.                                |
| x1                                                                                                                                                         | Yes.                                |
| x5                                                                                                                                                         | Yes.                                |
| x1                                                                                                                                                         | Yes.                                |
| -                                                                                                                                                          | Not required for 222x89 ducting.    |
| Supplied on mainbox.                                                                                                                                       |                                     |
| -                                                                                                                                                          | Yes. Required for 300 x 70 ducting. |
| Supplied on blowerbox.                                                                                                                                     | -                                   |
| -                                                                                                                                                          | Yes.                                |
| -                                                                                                                                                          | Yes.                                |
| -                                                                                                                                                          | Yes.                                |
| -                                                                                                                                                          | Yes.                                |
| -                                                                                                                                                          | Yes.                                |
| -                                                                                                                                                          | Yes.                                |


MAINBOX

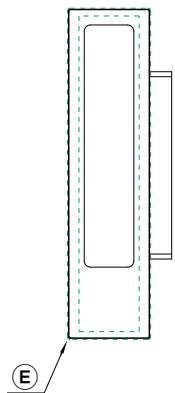


PLAN VIEW



300X70

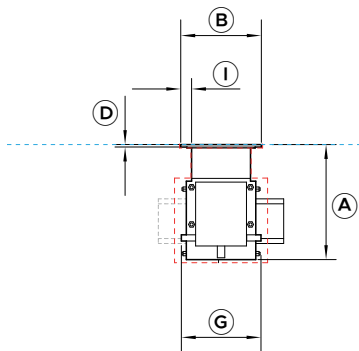

FRONT VIEW

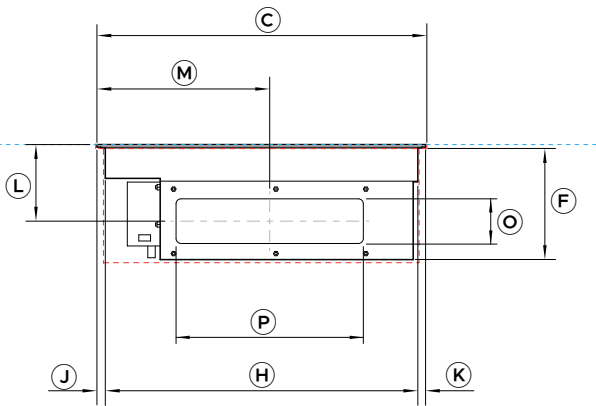

PROFILE VIEW



Model no:

13cm Modular Auxiliary Downdraft Rangehood, Black - **CD13DB1**  
13cm Modular Auxiliary Downdraft Rangehood, Grey - **CD13DG1**

| Product Dimensions                                             | mm  |
|----------------------------------------------------------------|-----|
| <b>A</b> Overall height of mainbox                             | 186 |
| <b>B</b> Overall width of mainbox                              | 130 |
| <b>C</b> Overall depth of mainbox                              | 530 |
| <b>D</b> Height of glass (includes flange and tape)            | 6   |
| <b>E</b> Corner radius of glass                                | 2   |
| <b>F</b> Height of chassis                                     | 180 |
| <b>G</b> Width of lower chassis (includes communication ports) | 126 |
| <b>H</b> Depth of chassis                                      | 504 |
| <b>I</b> Width from sides of glass to neck of chassis          | 18  |
| <b>J</b> Depth from front edge of glass to chassis             | 14  |
| <b>K</b> Depth from back edge of glass to chassis              | 13  |
| <b>L</b> Height from top of glass to centre of outlet          | 124 |
| <b>M</b> Depth from front edge of glass to centre of outlet    | 279 |
| <b>N</b> Width from edge of glass to outside of outlet         | 36  |
| <b>O</b> Height of ducting                                     | 70  |
| <b>P</b> Width of ducting                                      | 300 |

| Product Clearances                                                                                          | mm  |
|-------------------------------------------------------------------------------------------------------------|-----|
| Minimum clearance from top surface to top of any appliances, companion product or obstruction below mainbox | 200 |


| Cutout Dimensions*       | Proud mm | Flush mm |
|--------------------------|----------|----------|
| Overall width of cutout  | 98       | 98       |
| Overall depth of cutout  | 507      | 509      |
| Overall width of recess  | -        | 134      |
| Overall depth of recess  | -        | 534      |
| Overall height of recess | -        | 6.5      |
| Recess corner radius     | -        | 4        |

\* Note cutout position is centred to the Hob.



INDICATES CABINETRY / PRODUCT DATUM .....  
INDICATES CABINETRY CLEARANCES .....  
INDICATES CUTOUT .....

IMPORTANT NOTE: Throughout this guide, dimensions may vary by  $\pm 2\text{mm}$  (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit [fisherpaykel.com](https://fisherpaykel.com)


BLOWERBOX

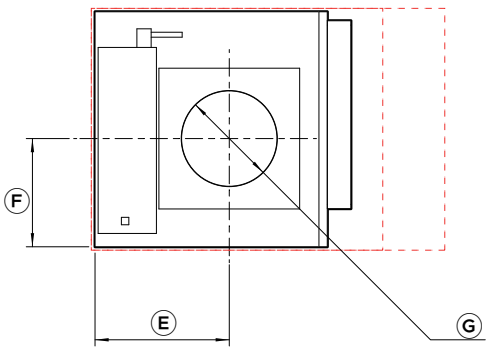

PLAN VIEW

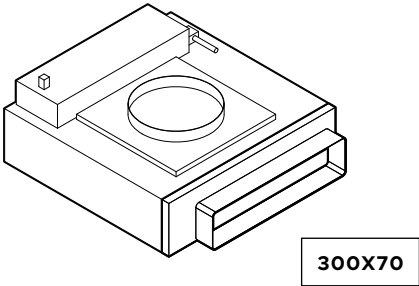

FRONT VIEW

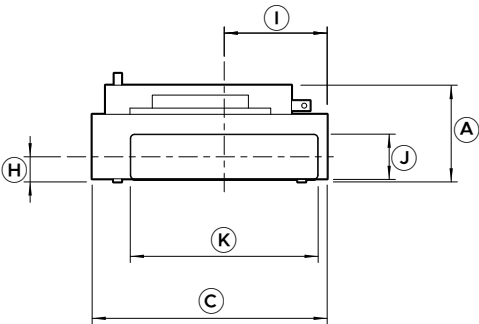

PROFILE VIEW



Model no:  
13cm Modular Auxiliary Downdraft Rangehood, Black - **CD13DB1**  
13cm Modular Auxiliary Downdraft Rangehood, Grey - **CD13DG1**


| Product Dimensions |                                                   | mm  |
|--------------------|---------------------------------------------------|-----|
| A                  | Overall height of blowerbox                       | 156 |
| B                  | Overall width of blowerbox (including outlet)     | 413 |
| C                  | Overall depth of blowerbox                        | 379 |
| D                  | Width of blowerbox                                | 375 |
| E                  | Width from corner to centre of inlet              | 217 |
| F                  | Depth from corner to centre of inlet              | 175 |
| G                  | Internal diameter of inlet                        | 154 |
| H                  | Height from base of product to centre of outlet   | 41  |
| I                  | Width from outside of chassis to centre of outlet | 166 |
| J                  | Height of outlet                                  | 70  |
| K                  | Width of outlet                                   | 300 |
| L                  | Depth of outlet                                   | 38  |

| Cutout Dimensions*             |  | mm  |
|--------------------------------|--|-----|
| Recommended width of cutout ** |  | 570 |
| Minimum width of cutout ***    |  | 470 |
| Depth of cutout                |  | 390 |


\* Blowerbox can be rotated to achieve desired outlet direction, cutout dimensions must be rotated accordingly.  
\*\* Recommended width allows greater access to outlet during installation.  
\*\*\* Clearance only for blowerbox, does not provide allowances for connecting to ducting.

INDICATES CABINERY / PRODUCT DATUM .....  
INDICATES CABINERY CLEARANCES .....  
INDICATES CUTOUT .....


IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit [fisherpaykel.com](https://fisherpaykel.com)




1 Horizontal Elbow 90°, 300x70




2 Vertical Elbow 90°, 300x70




3 Straight Adapter, 300x70 Rectangular to 150 Round



4 Duct Adapter 90°, 300x70 Rectangular to 150 Round



5 Connector, 300x70

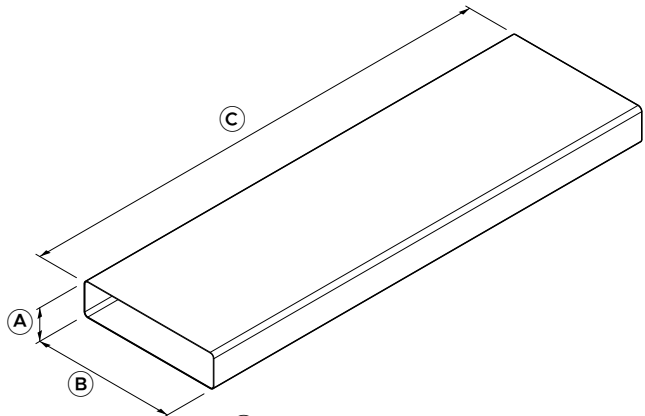

6 Duct 1M, 300x70

| Part                                                      | Supplied | Accessory No. | A Height | B Width | C Depth |
|-----------------------------------------------------------|----------|---------------|----------|---------|---------|
| 1 Horizontal Elbow, 90°, 300x70mm*                        | x1       | E90H30X7      | 77       | 352     | 352     |
| 2 Vertical Elbow, 90°, 300x70mm*                          | x2       | E90V30X7      | 137      | 307     | 137     |
| 3 Straight Adaptor, 300x70mm Rectangular to 150mm Round*  | x1       | DA30X7D15     | 150      | 307     | 250     |
| 4 Duct Adaptor, 90°, 300x70mm Rectangular to 150mm Round* | x1       | DA90D30X7D15  | 139      | 307     | 240     |
| 5 Connector for 300x70mm Ducting*                         | x1       | C30X7         | 77       | 307     | 85      |
| 6 Duct, 1m, 300x70mm*                                     | x1       | D100X30X7     | 73       | 303     | 1000    |

\* Component also available as an optional accessory  
\*\* Must be used over a pyrolytic oven  
\*\*\* For connection to Recirculation Kit KRCID834


CRITICAL NOTE

It is essential to work with CAD downloads of Modular Downdraft components to design a ducting layout best suited to specific cabinetry requirements.  
For design planning and installation support please contact the Fisher & Paykel design support team. [designsupport@fisherpaykel.com](mailto:designsupport@fisherpaykel.com)



INDICATES CABINETRY / PRODUCT DATUM -----  
INDICATES CABINETRY CLEARANCES -----  
INDICATES CUTOUT -----

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit [fisherpaykel.com](http://fisherpaykel.com)


MAINBOX

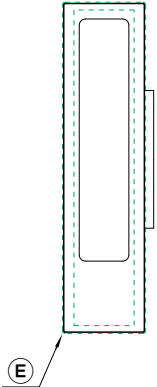

PLAN VIEW

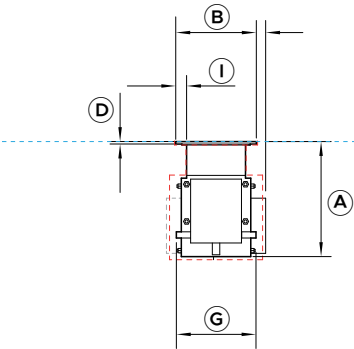

FRONT VIEW

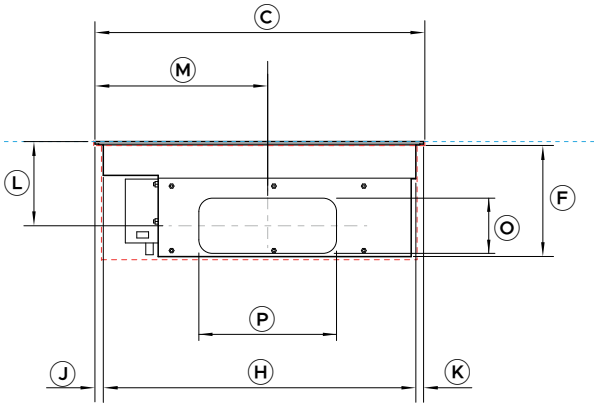

PROFILE VIEW



| Model no:                                                          |     |
|--------------------------------------------------------------------|-----|
| 13cm Modular Auxiliary Downdraft Rangehood, Black - <b>CD13DB2</b> |     |
| 13cm Modular Auxiliary Downdraft Rangehood, Grey - <b>CD13DG2</b>  |     |
| Product Dimensions                                                 |     |
|                                                                    | mm  |
| <b>A</b> Overall height of mainbox                                 | 186 |
| <b>B</b> Overall width of mainbox                                  | 130 |
| <b>C</b> Overall depth of mainbox                                  | 530 |
| <b>D</b> Height of glass (includes flange and tape)                | 6   |
| <b>E</b> Corner radius of glass                                    | 2   |
| <b>F</b> Height of chassis                                         | 180 |
| <b>G</b> Width of lower chassis (includes communication ports)     | 126 |
| <b>H</b> Depth of chassis                                          | 504 |
| <b>I</b> Width from sides of glass to neck of chassis              | 18  |
| <b>J</b> Depth from front edge of glass to chassis                 | 14  |
| <b>K</b> Depth from back edge of glass to chassis                  | 13  |
| <b>L</b> Height from top of glass to centre of outlet              | 136 |
| <b>M</b> Depth from front edge of glass to centre of outlet        | 279 |
| <b>N</b> Width from edge of glass to outside of outlet             | 36  |
| <b>O</b> Height of ducting                                         | 89  |
| <b>P</b> Width of ducting                                          | 222 |

| Product Clearances                                                                                          |     |
|-------------------------------------------------------------------------------------------------------------|-----|
|                                                                                                             | mm  |
| Minimum clearance from top surface to top of any appliances, companion product or obstruction below mainbox | 200 |


| Cutout Dimensions*       | Proud mm | Flush mm |
|--------------------------|----------|----------|
| Overall width of cutout  | 98       | 98       |
| Overall depth of cutout  | 507      | 509      |
| Overall width of recess  | -        | 134      |
| Overall depth of recess  | -        | 534      |
| Overall height of recess | -        | 6.5      |
| Recess corner radius     | -        | 4        |

\* Note cutout position is centred to the Hob.


INDICATES CABINETRY / PRODUCT DATUM  
INDICATES CABINETRY CLEARANCES  
INDICATES CUTOUT

IMPORTANT NOTE: Throughout this guide, dimensions may vary by  $\pm 2\text{mm}$  (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit [fisherpaykel.com](https://fisherpaykel.com)


BLOWERBOX

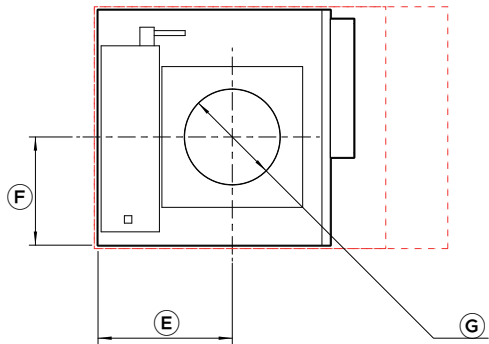


PLAN VIEW



222X89



FRONT VIEW

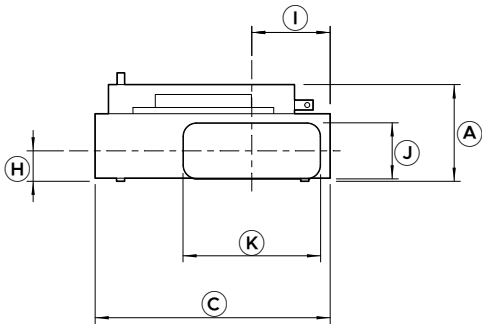

PROFILE VIEW



Model no:  
13cm Modular Auxiliary Downdraft Rangehood, Black - **CD13DB2**  
13cm Modular Auxiliary Downdraft Rangehood, Grey - **CD13DG2**


| Product Dimensions                                  | mm  |
|-----------------------------------------------------|-----|
| A Overall height of blowerbox                       | 156 |
| B Overall width of blowerbox (including outlet)     | 413 |
| C Overall depth of blowerbox                        | 379 |
| D Width of blowerbox chassis                        | 375 |
| E Width from corner to centre of inlet              | 217 |
| F Depth from corner to centre of inlet              | 175 |
| G Internal diameter of inlet                        | 154 |
| H Height from base of product to centre of outlet   | 49  |
| I Width from outside of chassis to centre of outlet | 127 |
| J Height of outlet                                  | 89  |
| K Width of outlet                                   | 222 |
| L Depth of outlet                                   | 38  |

| Cutout Dimensions*             | mm  |
|--------------------------------|-----|
| Recommended width of cutout ** | 570 |
| Minimum width of cutout ***    | 470 |
| Depth of cutout                | 390 |


\* Blowerbox can be rotated to achieve desired outlet direction, cutout dimensions must be rotated accordingly.  
\*\* Recommended width allows greater access to outlet during installation.  
\*\*\* Clearance only for blowerbox, does not provide allowances for connecting to ducting.

INDICATES CABINETRY / PRODUCT DATUM  
INDICATES CABINETRY CLEARANCES  
INDICATES CUTOUT


IMPORTANT NOTE: Throughout this guide, dimensions may vary by  $\pm 2\text{mm}$  (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit [fisherpaykel.com](https://fisherpaykel.com)




1 90° Bend Horizontal, 222x89




2 90° Bend Vertical, 222x89




3 Adapter Straight, 222x89 to 150



4 Adapter 90°, 222x89 to 150

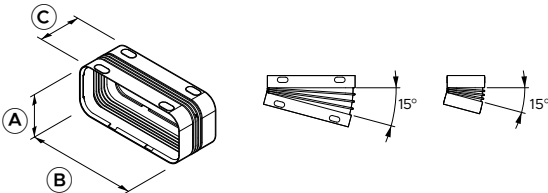

5 Joiner Flexi, 222x89

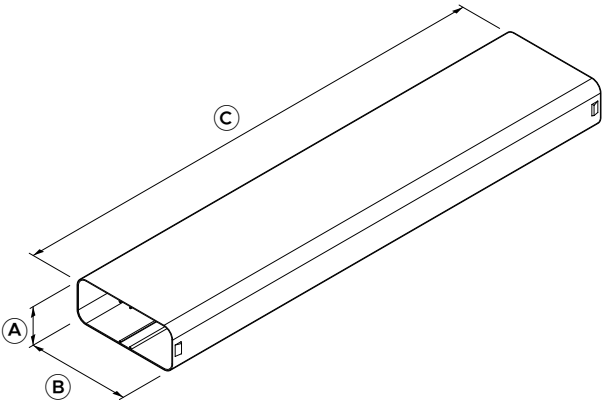

6 Duct Straight Length 1m, 222x89

| Part                                    | Supplied | Part No         | A Height | B Width | C Depth |
|-----------------------------------------|----------|-----------------|----------|---------|---------|
| 1 Duct 90° Bend Horizontal 222x89*      | x1       | E90H222X89      | 98       | 290     | 290     |
| 2 Duct 90° Bend Vertical 222x89*        | x2       | E90V222X89      | 164      | 228     | 164     |
| 3 Duct Adaptor Straight, 222x89 to 150* | x1       | DA222X89D150    | 154      | 227     | 166     |
| 4 Duct Adaptor 90°, 222x89 to 150*      | x1       | DA90D222X89D150 | 137      | 227     | 200     |
| 5 Duct Joiner Flexi, 222x89*            | x5       | C222X89         | 100      | 233     | 85      |
| 6 Duct Straight Length 1m, 222x89*      | x1       | D1000X222X89    | 89       | 222     | 1000    |

\* Component also available as an optional accessory

CRITICAL NOTE



It is essential to work with CAD downloads of Modular Downdraft components to design a ducting layout best suited to specific cabinetry requirements. For design planning and installation support please contact the Fisher & Paykel design support team. [designsupport@fisherpaykel.com](mailto:designsupport@fisherpaykel.com)

INDICATES CABINETRY / PRODUCT DATUM .....  
INDICATES CABINETRY CLEARANCES .....  
INDICATES CUTOUT .....

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit [fisherpaykel.com](http://fisherpaykel.com)

IMPORTANT NOTE

If specifying Recirculation Kit KRCID834 with CD13DB1 and CD13DG1, the Blowerbox Outlet Adaptor 222x89 (OAB222X89) is required.

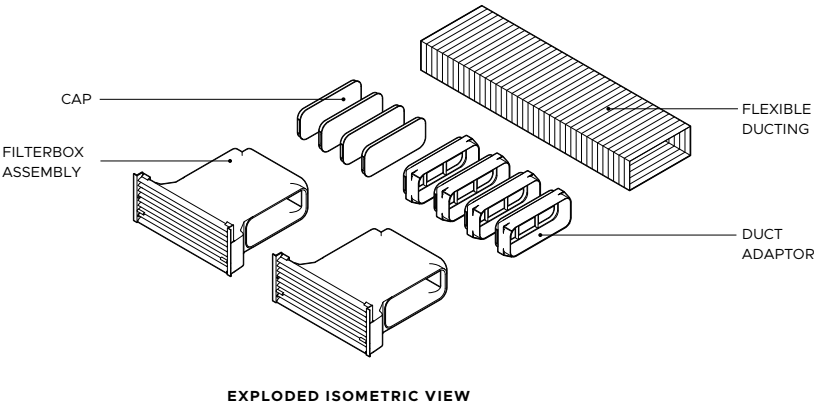


Optional Accessory Model no:

Recirculation Kit - **KRCID834**

| Component Description | Quantity |
|-----------------------|----------|
| Filter Box Assembly   | x2       |
| Duct Adaptor          | x4       |
| Cap                   | x4       |
| 3m Flexible Ducting   | x1       |

| Product Dimensions                                                                        | mm              |
|-------------------------------------------------------------------------------------------|-----------------|
| <b>A</b> Overall height of filter box assembly (louvres can be trimmed to suit kickstrip) | 150/130/115/100 |
| <b>B</b> Overall width of filter box assembly                                             | 362             |
| <b>C</b> Overall depth of filter box assembly                                             | 354             |
| <b>D</b> Height of filter box                                                             | 98              |
| <b>E</b> Width of filter box at front                                                     | 346             |
| <b>F</b> Width of filter box at rear                                                      | 256             |
| <b>G</b> Depth of filter box (excludes bracket)                                           | 351             |
| <b>H</b> Depth of bracket flange                                                          | 1               |
| <b>I</b> Depth of bracket and louvres                                                     | 26              |
| <b>J</b> Height from bottom of filter box to centre of outlets                            | 49              |
| <b>K</b> Depth from rear of filter box to centre of side outlets                          | 128             |
| <b>L</b> Height from bottom of bracket to lower hole centre                               | 19              |
| <b>M</b> Height between hole centres                                                      | 60              |
| <b>N</b> Depth from rear of bracket flange to hole centre                                 | 7               |
| <b>O</b> Hole diameter                                                                    | 4               |
| <b>P</b> Width of louvres                                                                 | 332             |



| Kickstrip Dimensions                          | mm              |
|-----------------------------------------------|-----------------|
| Height of kickstrip (louvres trimmed to suit) | 150/130/115/100 |
| Overall width of cutout                       | 347             |

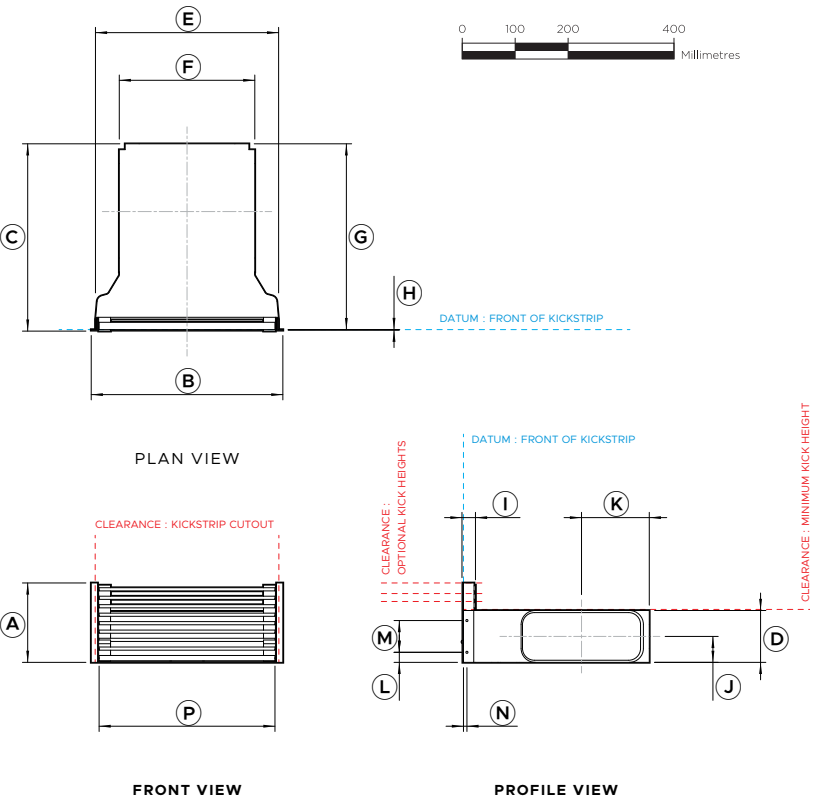

INDICATES CABINETRY / PRODUCT DATUM  
INDICATES CABINETRY CLEARANCES  
INDICATES CUTOUT

IMPORTANT NOTE: Throughout this guide, dimensions may vary by  $\pm 2\text{mm}$  (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit [fisherpaykel.com](https://fisherpaykel.com)


FILTER BOX ASSEMBLY WITH DUCT ADAPTOR AND CAPS - X2 SETS SUPPLIED  
Position of caps and adaptors can be interchanged to suit ducting layout

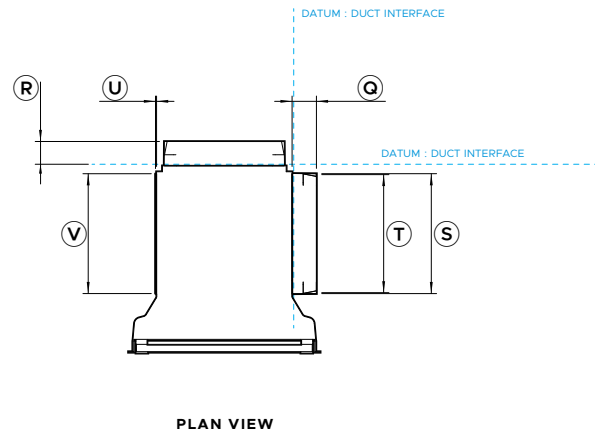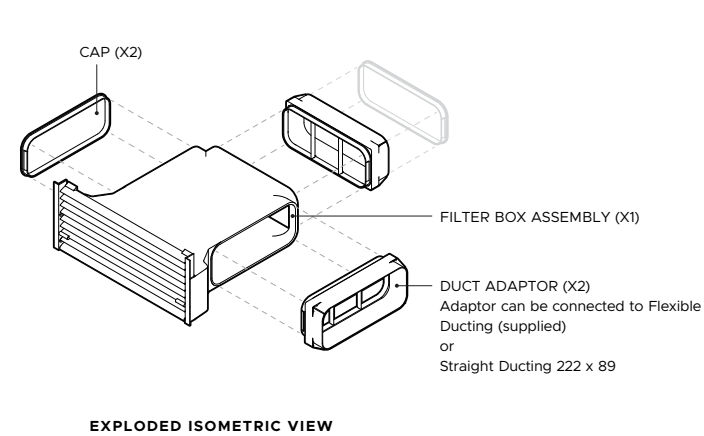

Optional Accessory Model no:  
Recirculation Kit - **KRCID834**

| Product Dimensions                                          | mm  |
|-------------------------------------------------------------|-----|
| A Distance from edge of duct adaptor to edge of filter box  | 46  |
| B Internal depth of female end of duct adaptor              | 43  |
| C Overall length of duct adaptor                            | 227 |
| D Internal length of female end of duct adaptor             | 223 |
| E Overall height of duct adaptor (not shown)                | 94  |
| F Internal height of female end of duct adaptor (not shown) | 90  |
| G Thickness of cap from edge of filter box                  | 2   |
| H Length of cap                                             | 226 |
| I Height of cap (not shown)                                 | 93  |

| Kickstrip Dimensions                          | mm              |
|-----------------------------------------------|-----------------|
| Height of kickstrip (louvres trimmed to suit) | 150/130/115/100 |
| Overall width of cutout                       | 347             |

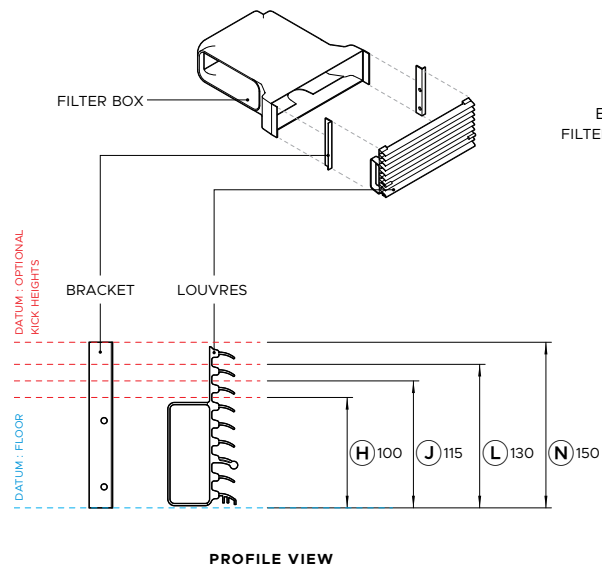


EXPLODED ISO VIEW  
FILTER BOX, BRACKETS + LOUVRES


EXPLODED PROFILE VIEW  
BRACKET + LOUVRES

INDICATES CABINETY / PRODUCT DATUM -----  
INDICATES CABINETY CLEARANCES -----  
INDICATES CUTOUT -----


IMPORTANT NOTE: Throughout this guide, dimensions may vary by  $\pm 2\text{mm}$  (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit [fisherpaykel.com](https://fisherpaykel.com)

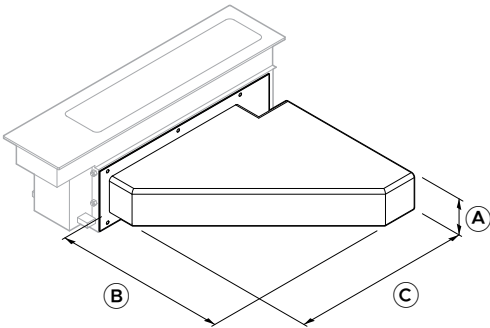


① Horizontal Elbow, 90°, 300x70, Steel




② Mainbox Outlet Adaptor, 222x89

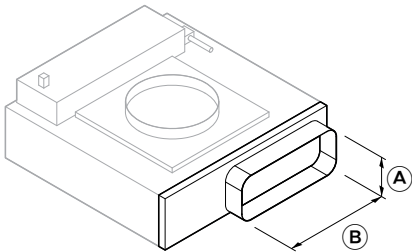


③ Blowerbox Outlet Adapter, 222x89

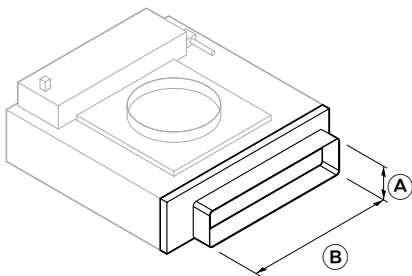


④ Blowerbox Outlet Adapter, 300x70




⑤ Outlet Grille, 222x89



⑥ 90° Bend, Round 150



⑦ Joiner Flexi, Round 150

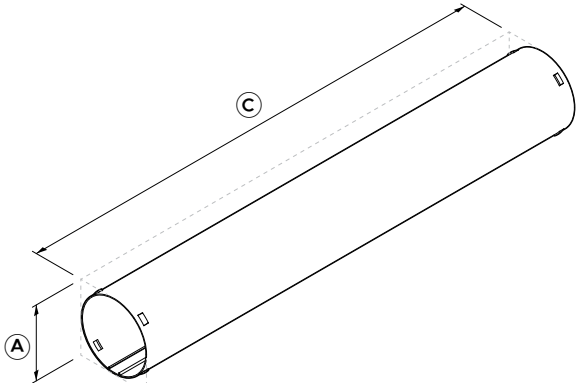

⑧ Duct Straight Length 1m, Round, 150

Optional Accessory

1 Horizontal Elbow 90°, 300x70mm, Steel\*

2 Mainbox Outlet Adaptor, 222x89mm (outlet dimensions shown)

3 Blower Outlet Adaptor, 222x89mm (outlet dimensions shown)

4 Blower Outlet Adaptor, 300x70mm (outlet dimensions shown)

5 Outlet Grille, 222x89

6 Duct 90° Vertical, Round 150

7 Duct Joiner Flexi, Round 150

8 Duct Straight Length 1m, Round 150

Part No

E90H30X7S

OAD222X89

OAB222X89

OAB300X70

DO-G-SS

E90V150

C150

D1000X150

A Height

74

89

89

70

161

227

163

150

B Width

350

222

222

300

290

157

-

-

C Depth

363

-

-

-

163

227

85

1000


\* for installation directly above an oven when 300x70 ducting is used. Not required for 222x89 ducting.

CRITICAL NOTE

It is essential to work with CAD downloads of Modular Downdraft components to design a ducting layout best suited to specific cabinetry requirements.

For design planning and installation support please contact the Fisher & Paykel design support team. [designsupport@fisherpaykel.com](mailto:designsupport@fisherpaykel.com)


## PRODUCT DECISIONS

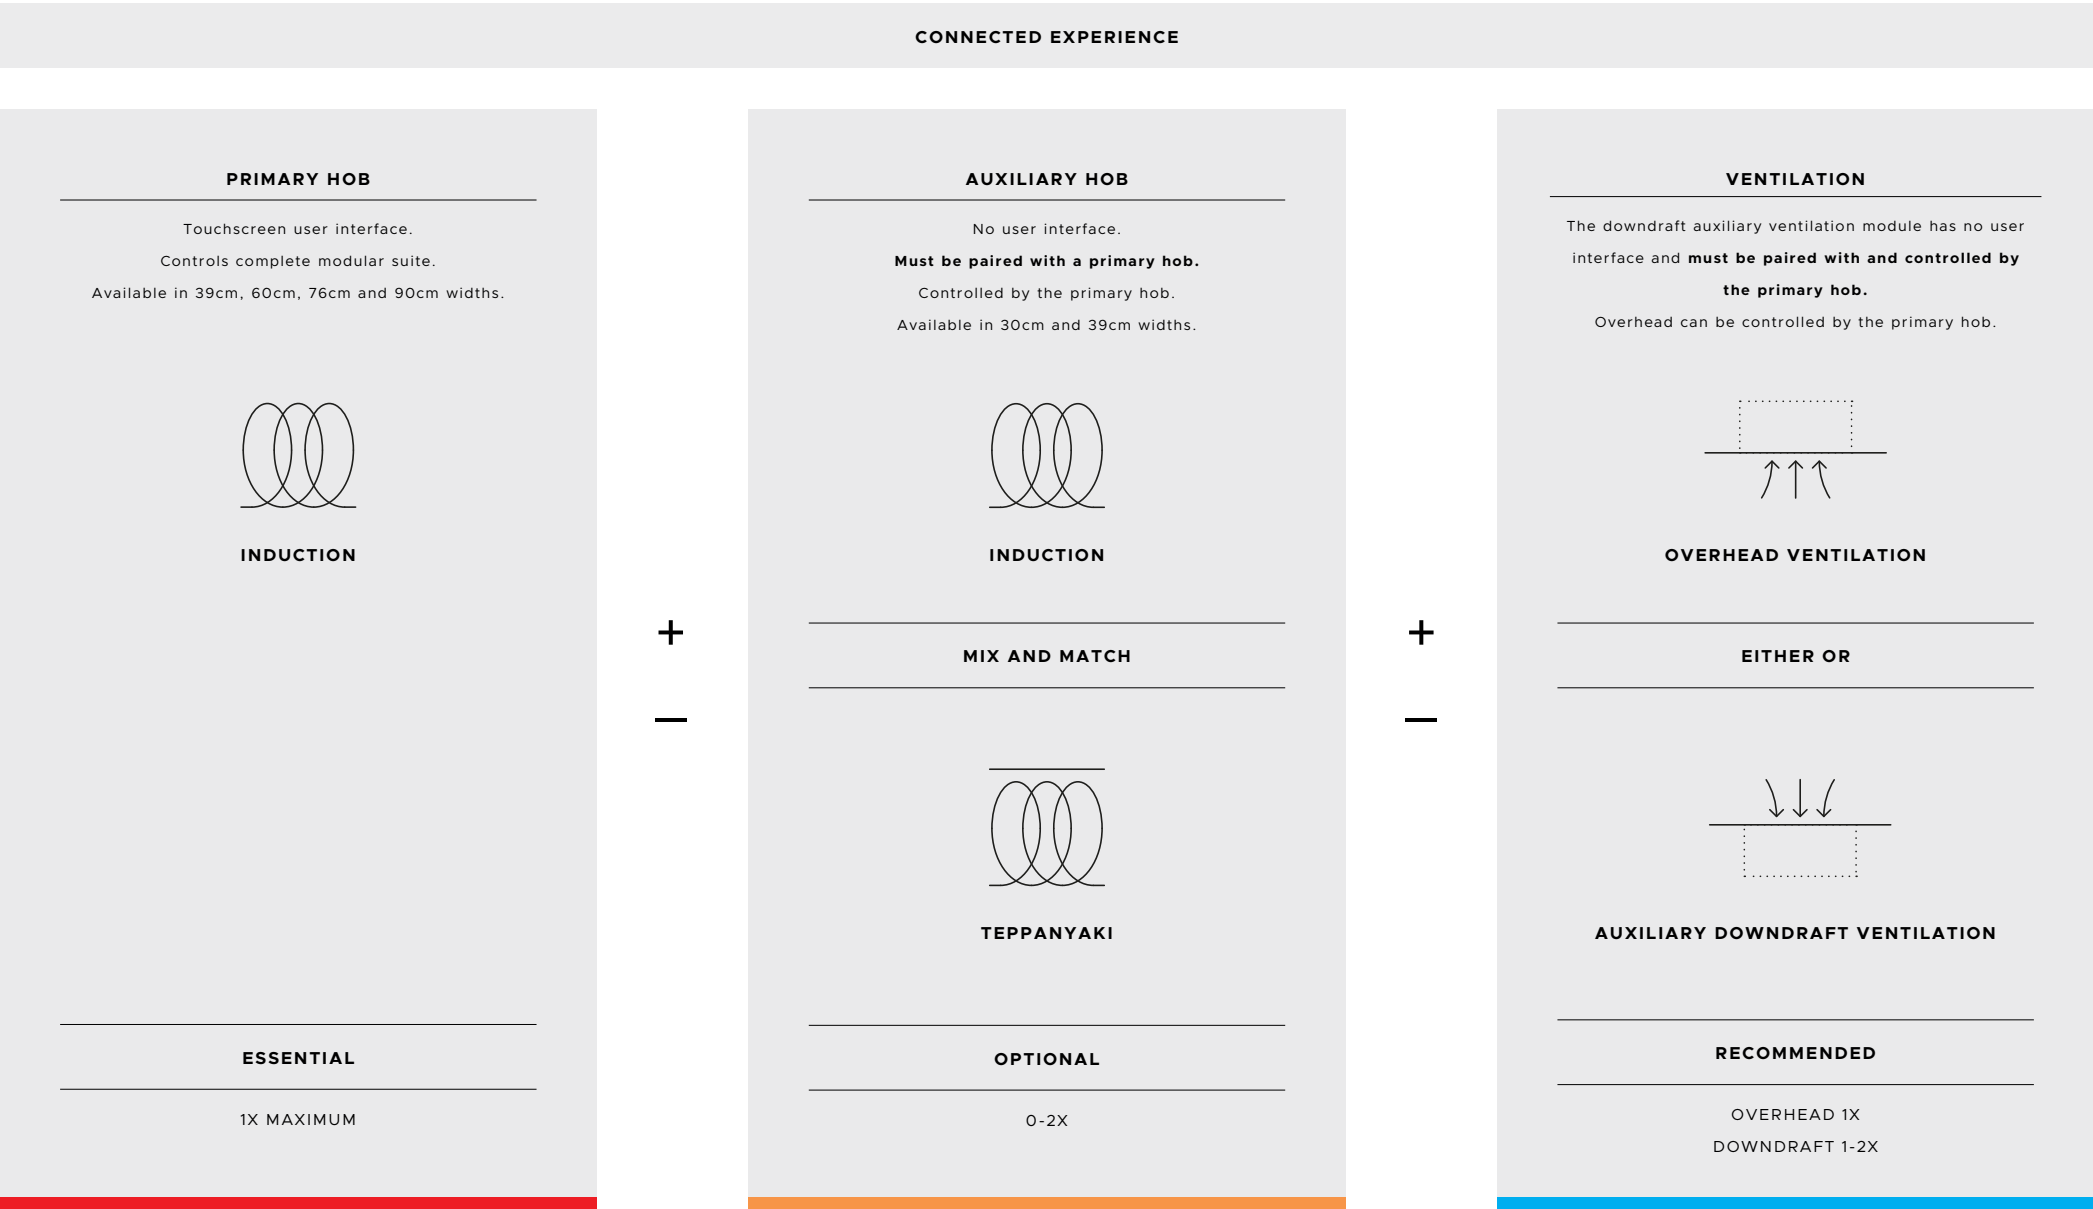

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://fisherpaykel.com)


DOWNDRAFT VENTILATION

The modular ventilation unit is a downdraft ventilation system that efficiently extracts air across and downwards.



TOP VIEW

The modular ventilation unit provides efficient ventilation to adjacent cook zones. Consideration of cook zone layout and cook module size is critical for optimum pairing of ventilation type and quantity.




FRONT VIEW

Important: Where modular ventilation is unable to provide efficient venting it is recommended that overhead extraction is chosen.


**WARNING:** The Modular Ventilation unit cannot be used alongside a gas Hob.

SUFFICIENT VENTILATION

ADJACENT COOKZONES ARE EFFECTIVELY VENTED

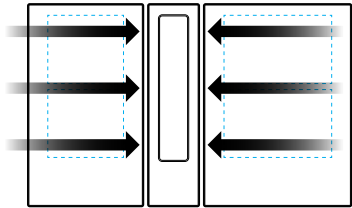


30CM + 39CM MODULES




60CM PRIMARY MODULE WITH 2X DOWNDRAFT

INSUFFICIENT VENTILATION


NON-ADJACENT COOKZONES ARE NOT SUFFICIENTLY VENTED



60CM PRIMARY MODULE WITH 1X DOWNDRAFT

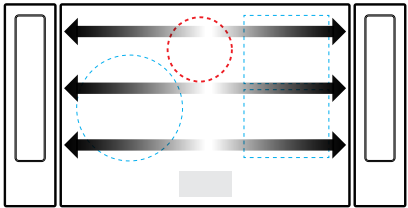


76CM PRIMARY MODULE WITH 2X DOWNDRAFT

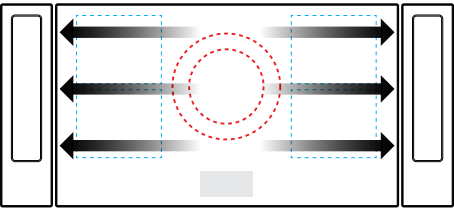

90CM PRIMARY MODULE WITH 2X DOWNDRAFT

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://fisherpaykel.com)

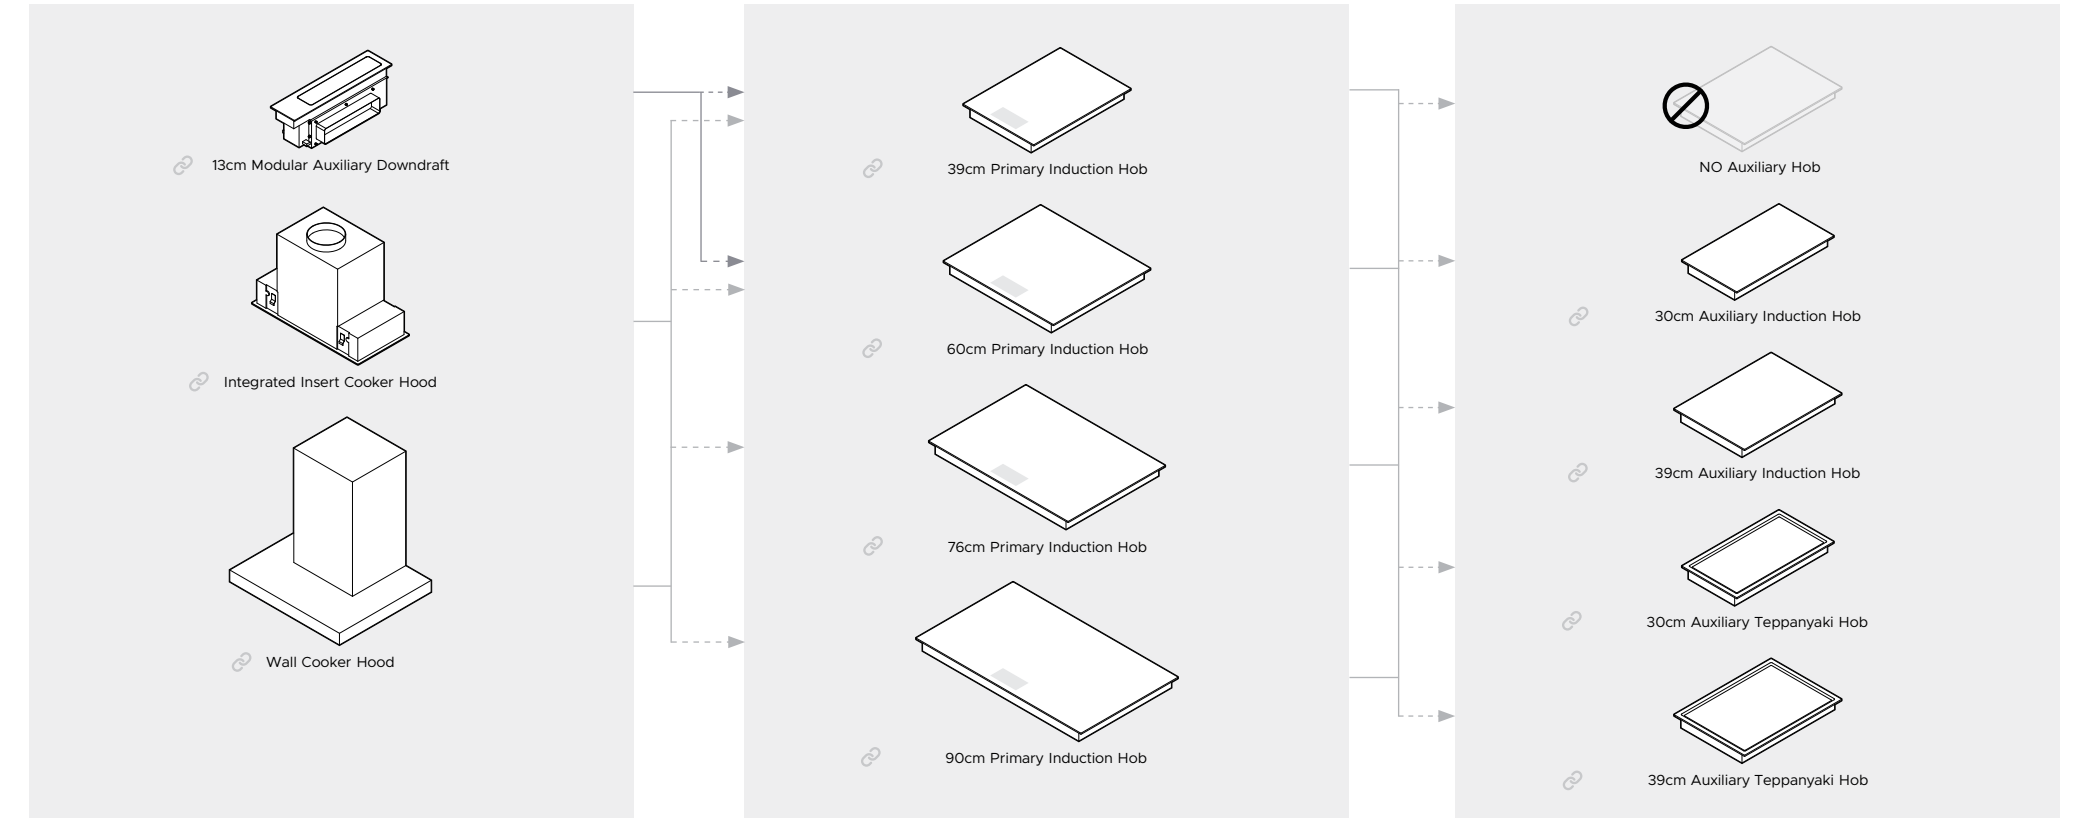

Choose between downdraft or overhead ventilation, both of which are seamlessly controlled by the Primary Hob. Auxiliary Modular Ventilation provides efficient venting to 39cm and 60cm Primary Hobs.

| AUXILIARY MODULAR VENTILATION                    | Black Glass     | Grey Glass |
|--------------------------------------------------|-----------------|------------|
| 13cm Modular Auxiliary Downdraft, 300x70 ducting | CD13DB1         | CD13DG1    |
| 13cm Modular Auxiliary Downdraft, 222x89 ducting | CD13DB2         | CD13DG2    |
|                                                  |                 |            |
| CONNECTED OVERHEAD VENTILATION                   | Stainless Steel |            |
| 60cm Integrated Insert Wall Cooker Hood          | HP60IHCB4       |            |
| 90cm Integrated Insert Wall Cooker Hood          | HP90IHCB4       |            |
| 90cm Box Chimney Wall Cooker Hood                | HC90BCXB4       |            |

Primary Hobs have a touchscreen via which the Auxiliary Induction, Teppanyaki and downdraft Ventilation modules are controlled.

| PRIMARY MODULAR HOBS       | Black Glass | Grey Glass |
|----------------------------|-------------|------------|
| 39cm Primary Induction Hob | CI392DTTB1  | CI392DTTG1 |
| 60cm Primary Induction Hob | CI604DTTB1  | CI604DTTG1 |
| 76cm Primary Induction Hob | CI764DTTB1  | CI764DTTG1 |
| 90cm Primary Induction Hob | CI905DTTB1  | CI905DTTG1 |


It is optional to pair up to 2x Auxiliary Hobs with a Primary Hob. Auxiliary units do not have an interface so must be installed with and controlled via a Primary module.

| AUXILIARY MODULAR HOBS        | Black Glass | Grey Glass |
|-------------------------------|-------------|------------|
| 30cm Auxiliary Induction Hob  | CI302DB1    | CI302DG1   |
| 39cm Auxiliary Induction Hob  | CI392DB1    | CI392DG1   |
| Stainless Steel               |             |            |
| 30cm Auxiliary Teppanyaki Hob | CI7302DX1   |            |
| 39cm Auxiliary Teppanyaki Hob | CI392DX1    |            |


The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

## PLANNING CONSIDERATIONS

INSTALLATION OVERVIEW

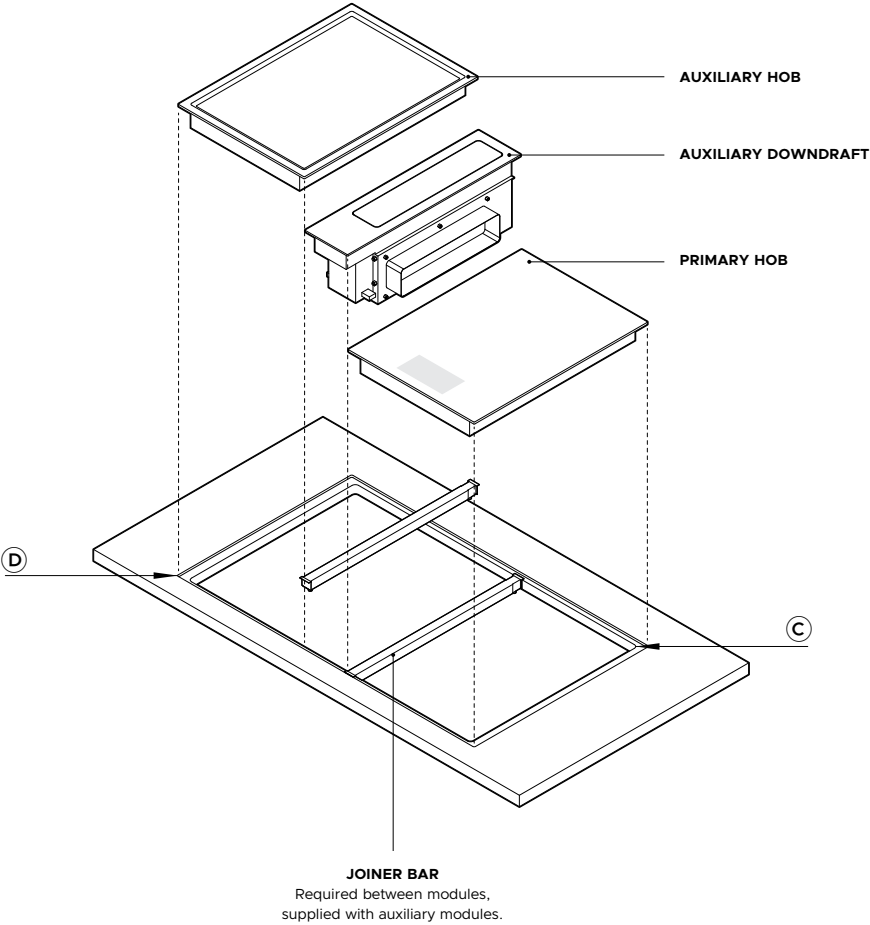

INSTALLATION DIMENSIONS

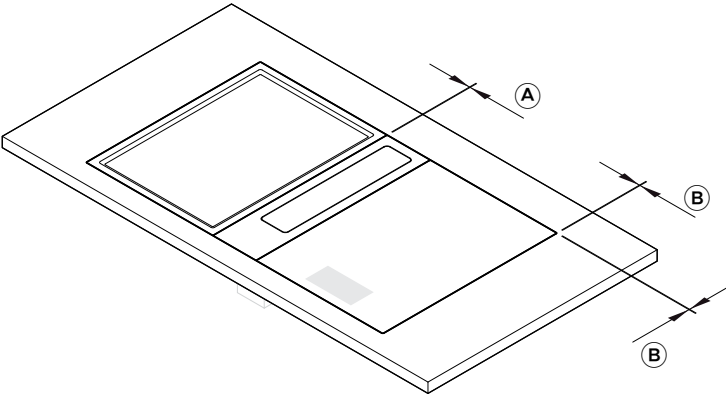


| INSTALLATION DIMENSIONS                                     |  | mm     |
|-------------------------------------------------------------|--|--------|
| <b>A</b> Distance between modules                           |  | 2      |
| <b>B</b> Distance between edge of module and edge of recess |  | 2      |
| <b>C</b> Corner radii of cutout                             |  | max 10 |
| <b>D</b> Corner radii of recess                             |  | 4      |

IMPORTANT NOTE

Cutout widths and radii may not be possible in certain benchtop materials. Please refer to benchtop suppliers material specifications and fabrication parameters.


The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://fisherpaykel.com)

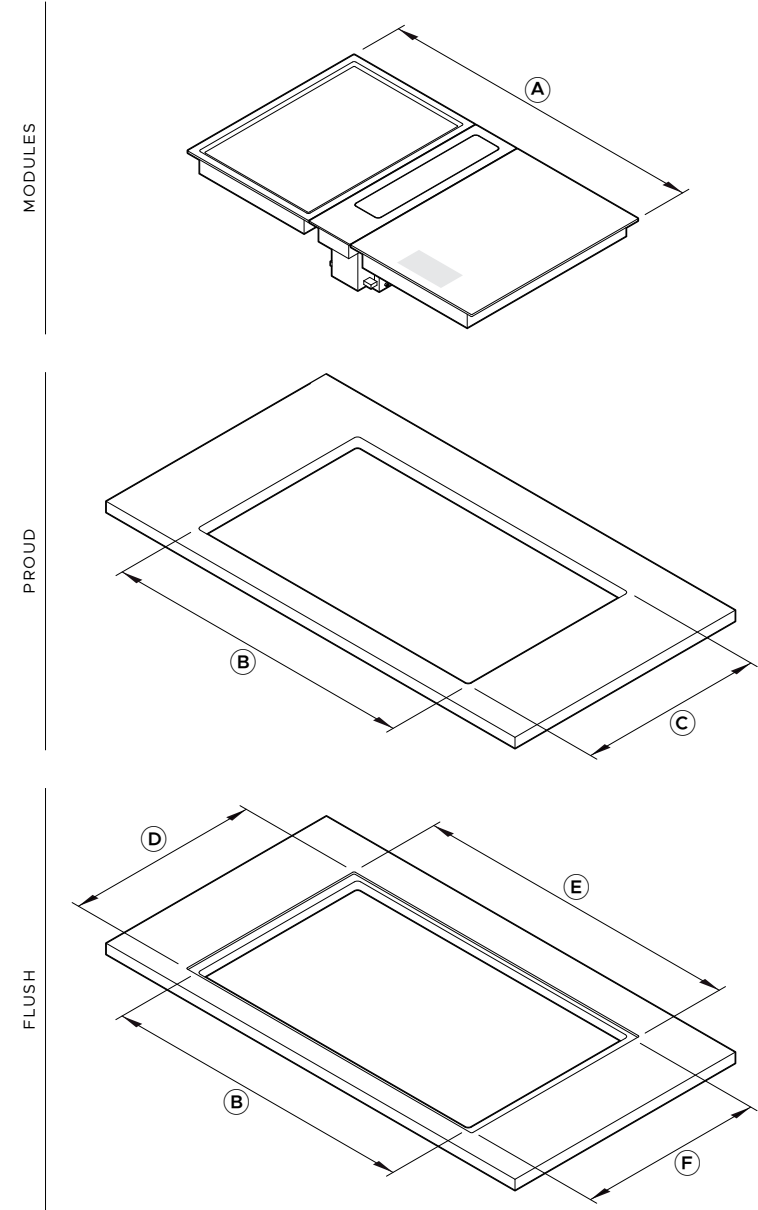

| COMBINED BENCHTOP EQUATIONS                                                                                                                                                                                                                                                                                          |                                    |   |                                              |   |                                                                   |                                                                      |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|---|----------------------------------------------|---|-------------------------------------------------------------------|----------------------------------------------------------------------|
| Pairings of modular products have been designed to fit in a singular benchtop cutout. When grouping modules it is essential to calculate their combined cutout requirements. The following equations can be used to guide calculations.<br>For dimensions of common configurations please refer to subsequent pages. |                                    |   |                                              |   |                                                                   |                                                                      |
| A                                                                                                                                                                                                                                                                                                                    | OVERALL WIDTH OF MODULES           | = | COMBINED PRODUCT WIDTHS<br>add module widths | + | GAPS BETWEEN MODULES<br>2mm x (number of modules -1)              |                                                                      |
| B                                                                                                                                                                                                                                                                                                                    | WIDTH OF CUTOUT<br>FLUSH AND PROUD | = | OVERALL WIDTH OF MODULES                     | - | LEFT OVERHANG<br>19mm Induction / Teppanyaki OR<br>16mm Downdraft | - RIGHT OVERHANG<br>19mm Induction / Teppanyaki OR<br>16mm Downdraft |
| C                                                                                                                                                                                                                                                                                                                    | DEPTH OF CUTOUT<br>PROUD           | = | 507mm                                        |   |                                                                   |                                                                      |
| B                                                                                                                                                                                                                                                                                                                    | WIDTH OF CUTOUT<br>FLUSH AND PROUD | = | OVERALL WIDTH OF MODULES                     | - | LEFT OVERHANG<br>19mm Induction / Teppanyaki OR<br>16mm Downdraft | - RIGHT OVERHANG<br>19mm Induction / Teppanyaki OR<br>16mm Downdraft |
| D                                                                                                                                                                                                                                                                                                                    | DEPTH OF CUTOUT<br>FLUSH           | = | 509mm                                        |   |                                                                   |                                                                      |
| E                                                                                                                                                                                                                                                                                                                    | WIDTH OF RECESS<br>FLUSH           | = | OVERALL WIDTH OF MODULES                     | + | 4mm<br>2mm each side                                              |                                                                      |
| F                                                                                                                                                                                                                                                                                                                    | DEPTH OF RECESS<br>FLUSH           | = | 534mm                                        | = | 530mm<br>product depth                                            | + 4mm<br>2mm top and bottom                                          |

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://fisherpaykel.com)

SINGLE - COMPACT <600




PRIMARY HOB  
AUXILIARY HOB  
AUXILIARY VENTILATION

1 SINGLE WITH AUXILIARY DOWNDRAFT - 39

| Dimensions           | W x D x H       |
|----------------------|-----------------|
| Combined Module Size | 517 x 530 x 180 |
| Recess, flush        | 521 x 534 x 6.5 |
| Cutout, flush*       | 482 x 509       |
| Cutout, proud*       | 482 x 507       |

\*Cutout width not central to overall width of modules. Offset specific to placement of downdraft unit to the left or right. Side overhangs differ for downdraft and Hob - downdraft 16mm, Hobs 19mm. Refer 'Benchtop Installation Details' for more information.

TWO IN A ROW - MID 900




2 TWO IN A ROW WITH AUXILIARY DOWNDRAFT- 39+39

| Dimensions           | W x D x H       |
|----------------------|-----------------|
| Combined Module Size | 904 x 530 x 180 |
| Recess, flush        | 908 x 534 x 6.5 |
| Cutout, flush*       | 862* x 509      |
| Cutout, proud*       | 862* x 507      |

\*Glass overhang at sides adjusted to fit 900mm cabinet. Dimensions specific to 900 cabinet constructed from 19mm panels. 866W cutout recommended if cabinetry construction allows.

THREE IN A ROW - WIDE >1200

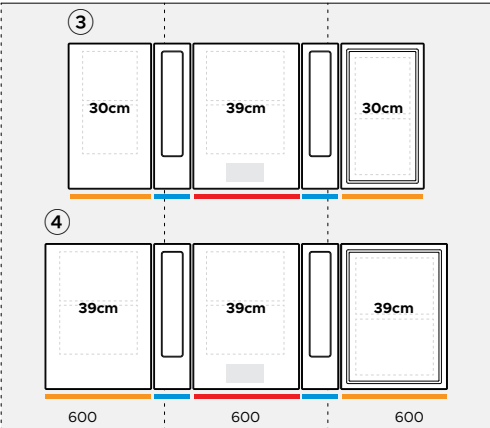


3 THREE IN A ROW WITH AUXILIARY DOWNDRAFT - 39+30+30

| Dimensions           | W x D x H        |
|----------------------|------------------|
| Combined Module Size | 1253 x 530 x 180 |
| Recess, flush        | 1257 x 534 x 6.5 |
| Cutout, flush        | 1215 x 509       |
| Cutout, proud        | 1215 x 507       |

4 THREE IN A ROW WITH AUXILIARY DOWNDRAFT - 39+39+39

| Dimensions           | W x D x H        |
|----------------------|------------------|
| Combined Module Size | 1423 x 530 x 180 |
| Recess, flush        | 1427 x 534 x 6.5 |
| Cutout, flush        | 1385 x 509       |
| Cutout, proud        | 1385 x 507       |

THREE IN A ROW - EXTRA WIDE >1450

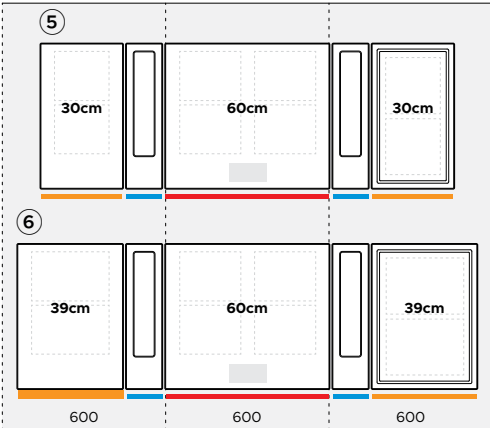

5 THREE IN A ROW WITH AUXILIARY DOWNDRAFT - 60+30+30

| Dimensions           | W x D x H        |
|----------------------|------------------|
| Combined Module Size | 1468 x 530 x 180 |
| Recess, flush        | 1472 x 534 x 6.5 |
| Cutout, flush        | 1430 x 509       |
| Cutout, proud        | 1430 x 507       |


6 THREE IN A ROW WITH AUXILIARY DOWNDRAFT - 60+39+39

| Dimensions           | W x D x H        |
|----------------------|------------------|
| Combined Module Size | 1638 x 530 x 180 |
| Recess, flush        | 1642 x 534 x 6.5 |
| Cutout, flush        | 1600 x 509       |
| Cutout, proud        | 1600 x 507       |

IMPORTANT NOTE

Other configurations are possible. Cutout widths may not be possible in certain benchtop materials. Please refer to benchtop suppliers material specifications and fabrication parameters.

MID <900

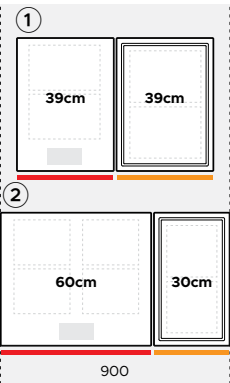

PRIMARY HOB  
AUXILIARY HOB

1 TWO IN A ROW - 39 + 39


| Dimensions           | W x D x H       |
|----------------------|-----------------|
| Combined Module Size | 772 x 530 x 74  |
| Recess, flush        | 776 x 534 x 6.5 |
| Cutout, flush        | 734 x 509       |
| Cutout, proud        | 734 x 507       |

2 TWO IN A ROW - 60 + 30

| Dimensions           | W x D x H       |
|----------------------|-----------------|
| Combined Module Size | 902 x 530 x 58  |
| Recess, flush        | 906 x 534 x 6.5 |
| Cutout, flush *      | 862* x 509      |
| Cutout, proud *      | 862* x 507      |

\*Glass overhang at sides adjusted to fit 900mm cabinet. Dimensions specific to 900 cabinet constructed from 19mm panels. 866W cutout recommended if cabinetry construction allows.

WIDE <1200

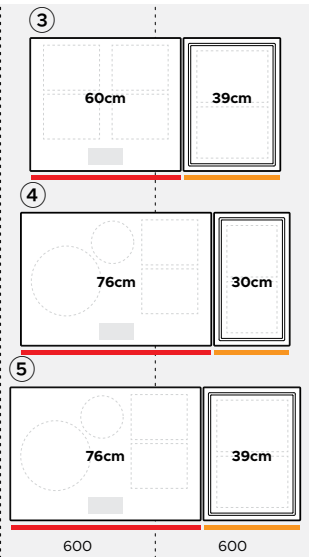

3 TWO IN A ROW - 60 + 39


| Dimensions           | W x D x H       |
|----------------------|-----------------|
| Combined Module Size | 987 x 530 x 74  |
| Recess, flush        | 991 x 534 x 6.5 |
| Cutout, flush        | 949 x 509       |
| Cutout, proud        | 949 x 507       |

4 TWO IN A ROW - 76 + 30

| Dimensions           | W x D x H        |
|----------------------|------------------|
| Combined Module Size | 1062 x 530 x 74  |
| Recess, flush        | 1066 x 534 x 6.5 |
| Cutout, flush        | 1024 x 509       |
| Cutout, proud        | 1024 x 507       |

5 TWO IN A ROW - 76 + 39

| Dimensions           | W x D x H        |
|----------------------|------------------|
| Combined Module Size | 1147 x 530 x 74  |
| Recess, flush        | 1151 x 534 x 6.5 |
| Cutout, flush        | 1109 x 509       |
| Cutout, proud        | 1109 x 507       |

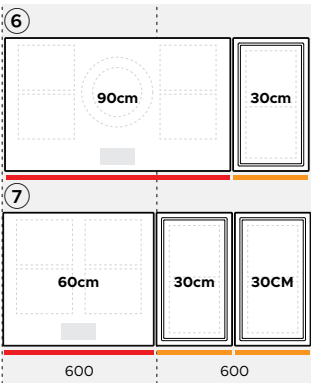

6 TWO IN A ROW - 90 + 30

| Dimensions           | W x D x H        |
|----------------------|------------------|
| Combined Module Size | 1202 x 530 x 74  |
| Recess, flush        | 1206 x 534 x 6.5 |
| Cutout, flush        | 1164 x 509       |
| Cutout, proud        | 1164 x 507       |

7 THREE IN A ROW - 60 + 30 + 30

| Dimensions           | W x D x H        |
|----------------------|------------------|
| Combined Module Size | 1204 x 530 x 74  |
| Recess, flush        | 1208 x 534 x 6.5 |
| Cutout, flush        | 1166 x 509       |
| Cutout, proud        | 1166 x 507       |

IMPORTANT NOTE

Other configurations are possible.  
Cutout widths may not be possible in certain  
benchtop materials. Please refer to benchtop  
suppliers material specifications and fabrication  
parameters.

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

BENCHTOP INSTALLATION

A flush or proud finish between the top surface of the modules and benchtop is achievable.

Some overhang details are common left to right or front to back, however there are small dimensional changes between proud and flush, cooking modules and ventilation module.

Care needs to be taken during planning and fabrication to ensure successful installation of modules


Shimming may be required during flush installation.

SIDE OVERHANGS

INDUCTION + TEPPANYAKI MODULES



DOWNDRAFT MODULE




FRONT + REAR OVERHANG


ALL MODULES




FRONT VIEW

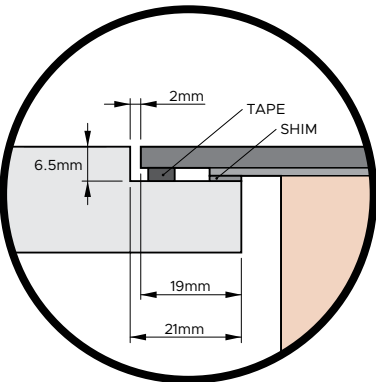

FRONT VIEW

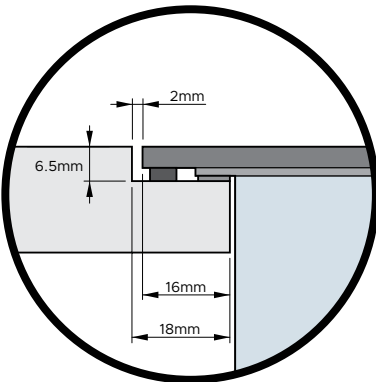


PROFILE VIEW




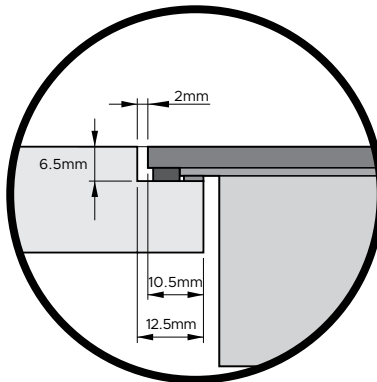


BENCH DETAIL

FLUSH

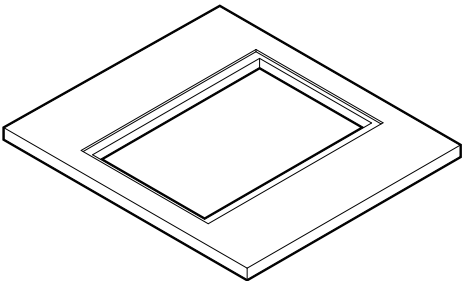

PROUD

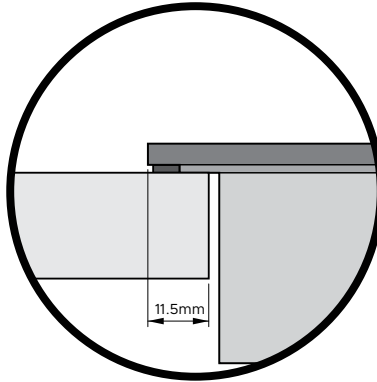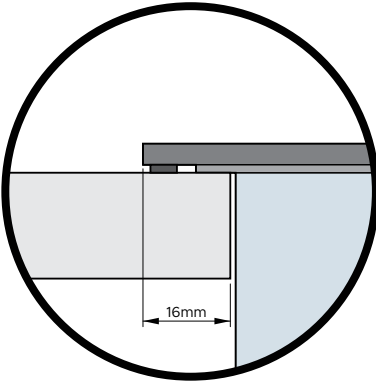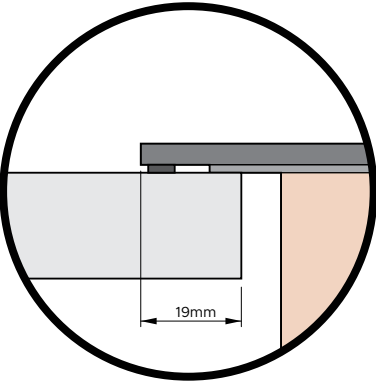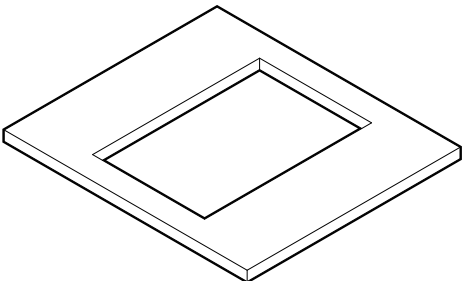


The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://fisherpaykel.com)


BRACKET TYPES

COMMON BRACKET

Applies to all bracket locations, excluding rear downdraft




ISO FRONT VIEW

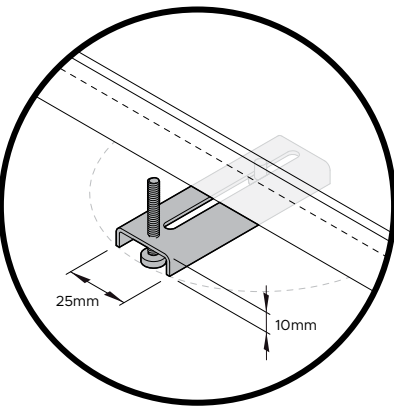


DETAIL A  
Can be rotated and moved horizontally

REAR DOWNDRAFT BRACKET



ISO REAR VIEW

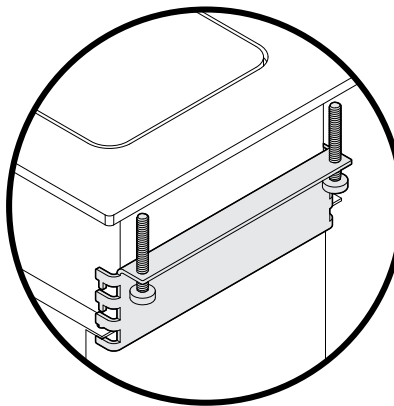


DETAIL B  
Bracket can be repositioned vertically

CLEARANCE REQUIREMENTS

ALL MODULES



SIDE VIEW

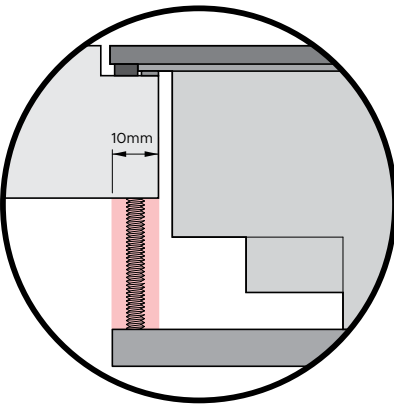

DETAIL C  
Minimum clearance common to all brackets left/right and front/rear


CLAMPS

Clamps are supplied with modules to secure their position to benchtop. There are two types, common and rear downdraft.


It is recommended to have 10mm clearance from edge of cutout for clamp engagement.

Clamps are attached to chassis at fixed hole locations. A minimum of 2 clamps are required per module, it is recommended they are positioned on opposite sides of each module eg. left and right or front and rear.


For more details please refer to Install Guide.

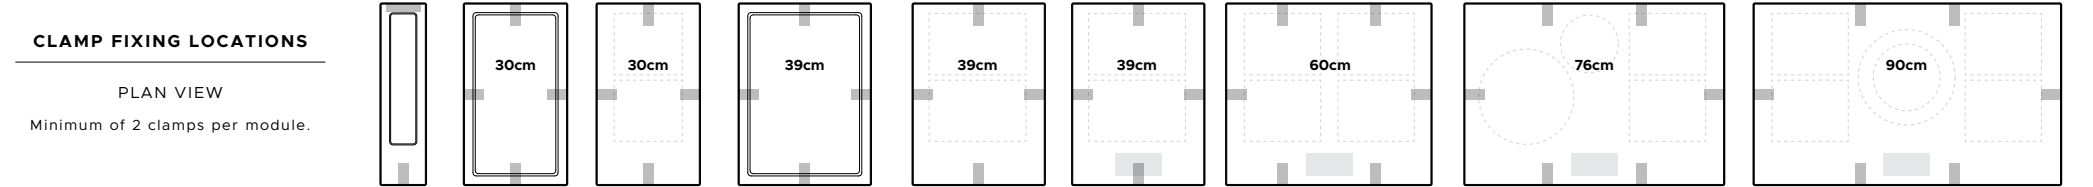

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://fisherpaykel.com)

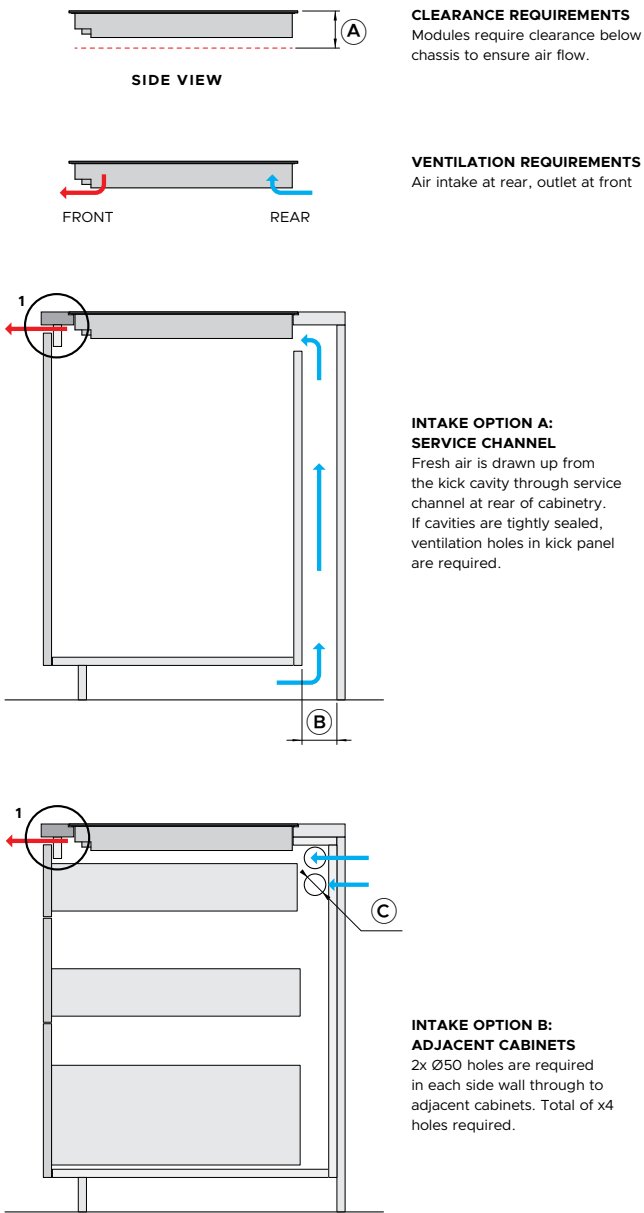


**VENTILATION OUTLET**  
Hot air from cook modules must be able to exit at front of cabinets, the most direct route is recommended.  
The detail below shows one solution where cutouts have been made in the support rail at front of cabinet, other routes are possible but must meet dimensional guidelines in table.

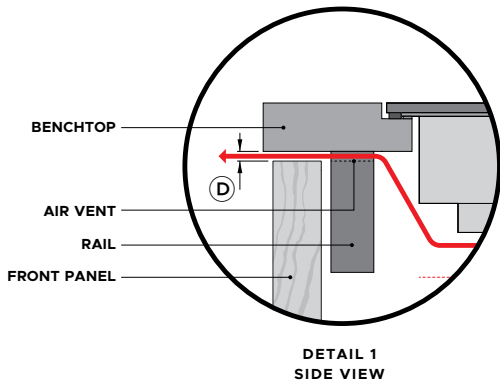

**EXAMPLE VENTILATION CUTOUTS**

Single cutout in rail, full width of chassis, 4mm high.

Example of alternate cutout where equivalent ventilation area is achieved.

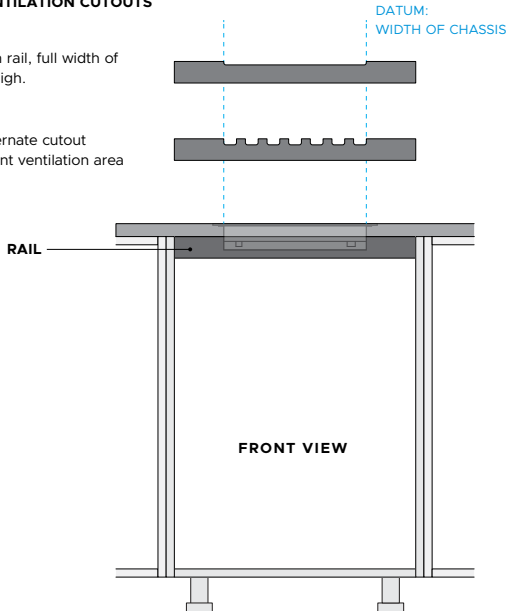

**VENTILATION OVERVIEW**

The cook modules require ventilation to allow cooling of the electronic components within the chassis. Cooling fans are located on the base of the product drawing cool air into the rear of the product while hot air exits from vents at the front.

Provisions need to be made in cabinetry to allow fresh air to enter and hot air to exit to ensure product ventilation and optimum product performance.

When multiple products are installed their individual ventilation requirements must also be combined.

| CLEARANCE REQUIREMENTS                                    |  | mm |
|-----------------------------------------------------------|--|----|
| <b>A</b> Clearance below chassis from top of cook surface |  |    |
| - Induction                                               |  | 72 |
| - Teppanyaki                                              |  | 86 |

| VENTILATION REQUIREMENTS                           |         |                 |
|----------------------------------------------------|---------|-----------------|
| INTAKE at rear                                     |         |                 |
|                                                    | mm      | cm <sup>2</sup> |
| <b>B</b> via service channel, min depth            | 20      | -               |
| <b>C</b> through adjacent cabinets, per side wall* | 2x Ø50  | 40              |
| OUTLET at front*                                   |         |                 |
|                                                    | w x h   | cm <sup>2</sup> |
| <b>D</b> 4mm gap along width of chassis            |         |                 |
| - 30cm cook module                                 | 255 x 4 | 10              |
| - 39cm cook module                                 | 340 x 4 | 14              |
| - 60cm cook module                                 | 555 x 4 | 22              |
| - 76cm cook module                                 | 715 x 4 | 30              |
| - 90cm cook module                                 | 855 x 4 | 34              |


\* vents with equivalent-sized area possible. Must be positioned in front of product.

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

MODULAR VENTILATION


Modular Downdraft consists of two units, a mainbox positioned in the benchtop and a blower box positioned on the floor or subfloor. They are connected via ducting. Ducting details can be found on subsequent pages.

The direction of vent outlets on both units can be changed to suit product placement and cabinetry layout.



**MAINBOX**  
The mainbox can vent to the left or right. The vent outlet can be secured to either side of the mainbox during installation.


OUTLET



**BLOWERBOX**  
The blowerbox can be rotated 360° around the intake, allowing the vent outlet to be directed to suit.

INTAKE

OUTLET

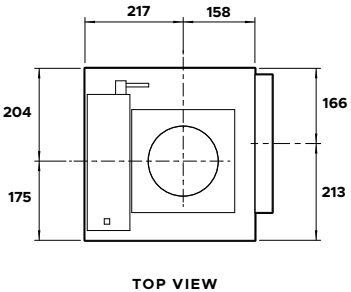

**TOP VIEW**


217 158 204 166 175 213

**IMPORTANT**


Blowerbox inlet and outlet are offset, component is not symmetrical (CD13DB1, CD13DG1 outlet shown, refer to datasheets for more detail). CARE TO BE TAKEN WHEN PLANNING.

DUCT ROUTING

Representational airflow showing indicative routing for ducting. The distance between the mainbox and blower box is restricted by the 1.7m length of the control cable connecting the two boxes. Refer to Sevicees page for connection locations.

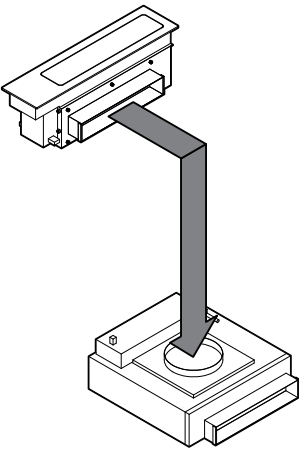


**DIRECT**  
Minimal bends. Ducting routed within cabinet.

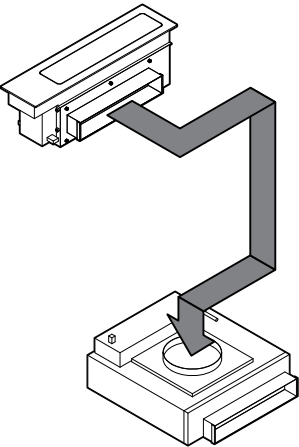

**SERVICE CHANNEL**  
Ducting routed through service channel at rear of cabinet or behind cabinet.

BLOWERBOX CUTOUT

The Blowerbox requires a minimum cutout of 390mm x 470mm in base of cabinetry so it can be positioned on the floor. For ease of installation and connection to outlet ducting it is recommended that the cutout is increased to 390mm x 570mm.

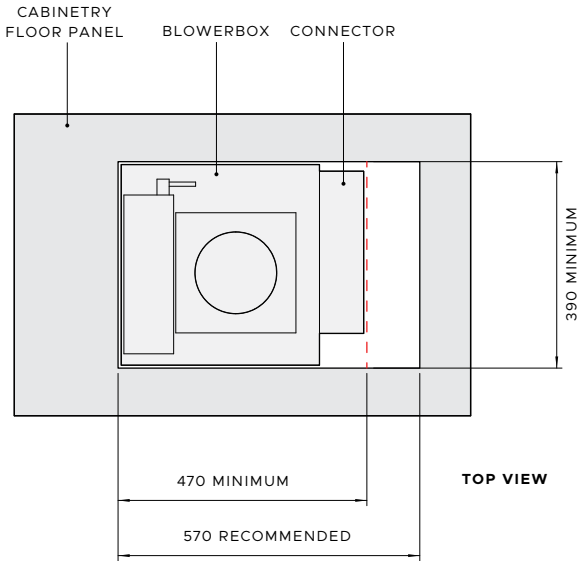


**IMPORTANT**

Depending on product placement and duct route blowerbox might not be central to cabinet floor panel. CARE TO BE TAKEN WHEN PLANNING. For design planning and installation support please contact the Fisher & Paykel design support team. [designsupport@fisherpaykel.com](mailto:designsupport@fisherpaykel.com)


The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://www.fisherpaykel.com)

CD13DB1 CD13DG1 MODULAR AUXILIARY DOWNDRAFT - 300x70 DUCTING

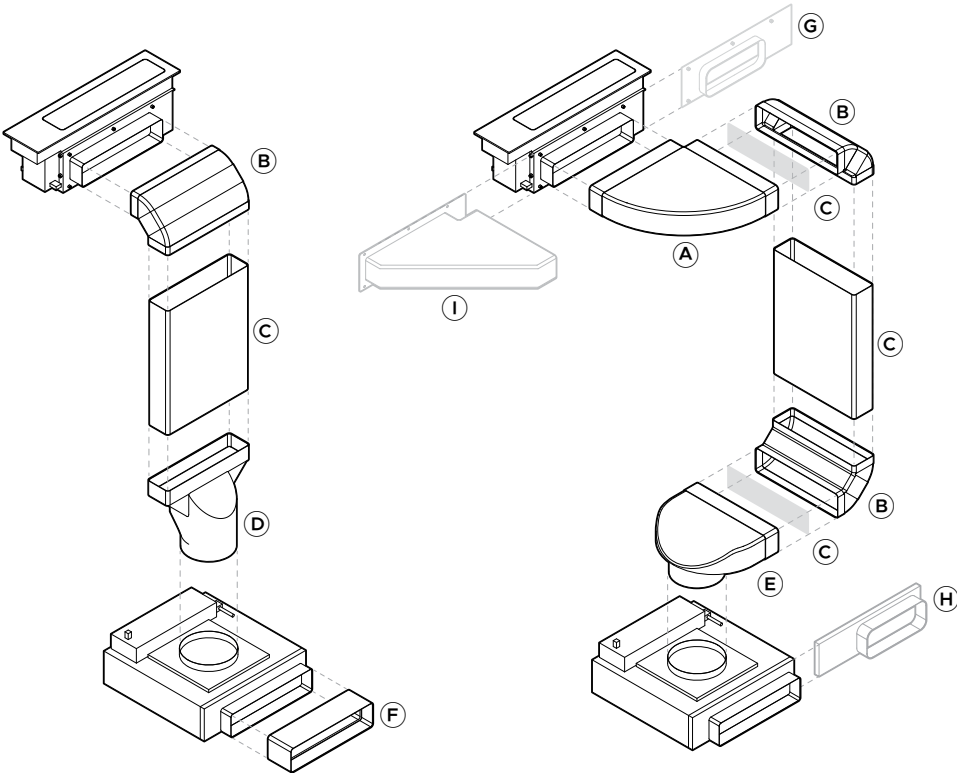

| Ducting Component                                     | Supplied | Model supplied with | Optional Accessory Part No. |
|-------------------------------------------------------|----------|---------------------|-----------------------------|
| <b>A</b> Horizontal Elbow, 90°, 300x70*               | x1       | CD13DB1, CD13DG1    | E90H30X7                    |
| <b>B</b> Vertical Elbow, 90°, 300x70*                 | x2       | CD13DB1, CD13DG1    | E90V30X7                    |
| <b>C</b> Duct, 1m, 300x70mm*                          | x1       | CD13DB1, CD13DG1    | D100X30X7                   |
| <b>D</b> Duct Adaptor, 150mm Diameter, 300x70mm*      | x1       | CD13DB1, CD13DG1    | DA30X7D15                   |
| <b>E</b> Duct Adaptor, 90°, 150mm Diameter, 300x70mm* | x1       | CD13DB1, CD13DG1    | DA90D30X7D15                |
| <b>F</b> Connector, 300x70*                           | x1       | CD13DB1, CD13DG1    | C30X7                       |
| <b>G</b> Outlet Adaptor, Mainbox, 222x89mm            |          |                     | OAD222X89                   |
| <b>H</b> Outlet Adaptor, Blower, 222x89mm             |          |                     | OAB222X89                   |
| <b>I</b> Horizontal Elbow, 90°, 300x70mm, Steel       |          |                     | E90H30X7S                   |

CD13DB2 CD13DG2 MODULAR AUXILIARY DOWNDRAFT - 222x89 DUCTING

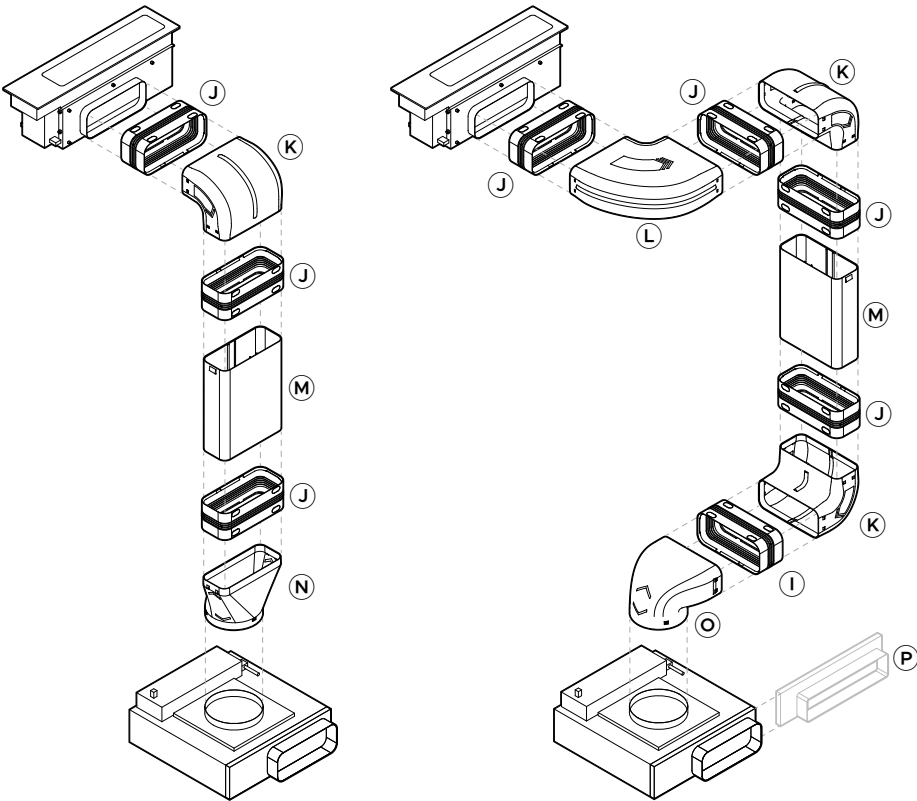


| Ducting Component                         | Supplied | Model supplied with | Optional Accessory Part No. |
|-------------------------------------------|----------|---------------------|-----------------------------|
| <b>J</b> Duct Joiner Flexi 222x89*        | x5       | CD13DB2, CD13DG2    | C222X89                     |
| <b>K</b> Duct 90 Bend Vertical 222x89*    | x2       | CD13DB2, CD13DG2    | E90V222X89                  |
| <b>L</b> Duct 90 Bend Horizontal 222x89*  | x1       | CD13DB2, CD13DG2    | E90H222X89                  |
| <b>M</b> Duct Straight Length 222x89*     | x1       | CD13DB2, CD13DG2    | D1000X222X89                |
| <b>N</b> Duct Adaptor 150 To 222x89*      | x1       | CD13DB2, CD13DG2    | DA222X89D150                |
| <b>O</b> Duct Adaptor 90 150 To 222x89*   | x1       | CD13DB2, CD13DG2    | DA90D222X89D150             |
| <b>P</b> Outlet Adaptor, Blower, 300x70mm |          |                     | OAB300X70                   |


\* Component also available as an optional accessory

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

DIRECT DUCTING WITHIN CABINET



DUCTING THROUGH SERVICE CHANNEL



DUCTING OVERVIEW

These are representational illustrations of modular downdraft with ducting. Overall dimensions are included. **Other ducting layouts are possible.**

Cabinetry may need to be adapted with features such as cutouts, false panels, shelf and drawer modifications to accommodate ducting.



DUCTING LENGTH

The distance between the mainbox and blower box is restricted by the 1.7m length of the control cable connecting the two boxes. Refer to Sevicees page for connection locations.



IMPORTANT

It is essential to work with CAD downloads of Modular Downdraft components to design a ducting layout best suited to specific cabinetry requirements. For design planning and installation support please contact the Fisher & Paykel design support team. [designsupport@fisherpaykel.com](mailto:designsupport@fisherpaykel.com)


300x70 DUCTING  
CD13DB1 CD13DG1

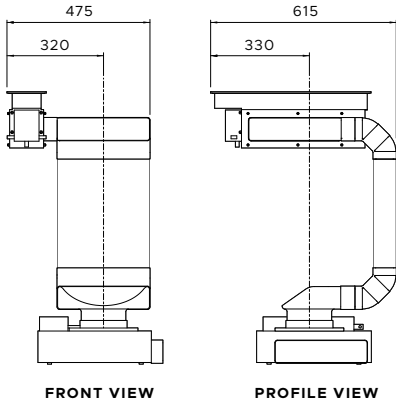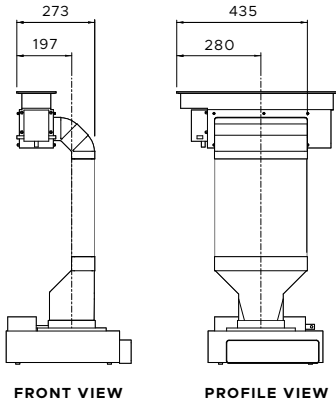

222x89 DUCTING  
CD13DB2 CD13DG2

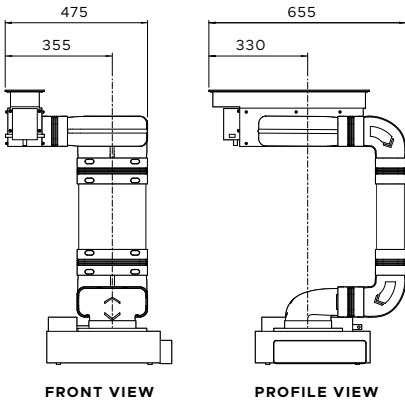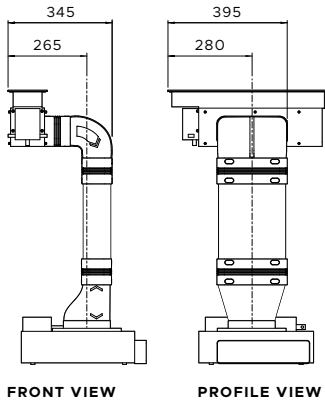


DUCT JOINER FLEXI 222X89\*  
Joiners allow up to 15° of movement

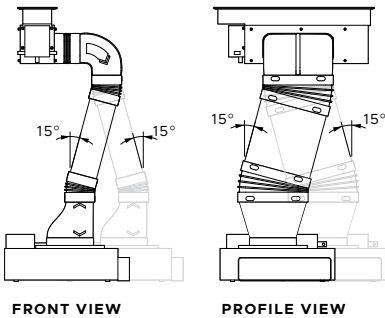

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](http://fisherpaykel.com)


DUCT OUT

OVERVIEW WITH DUCTING COMPONENTS

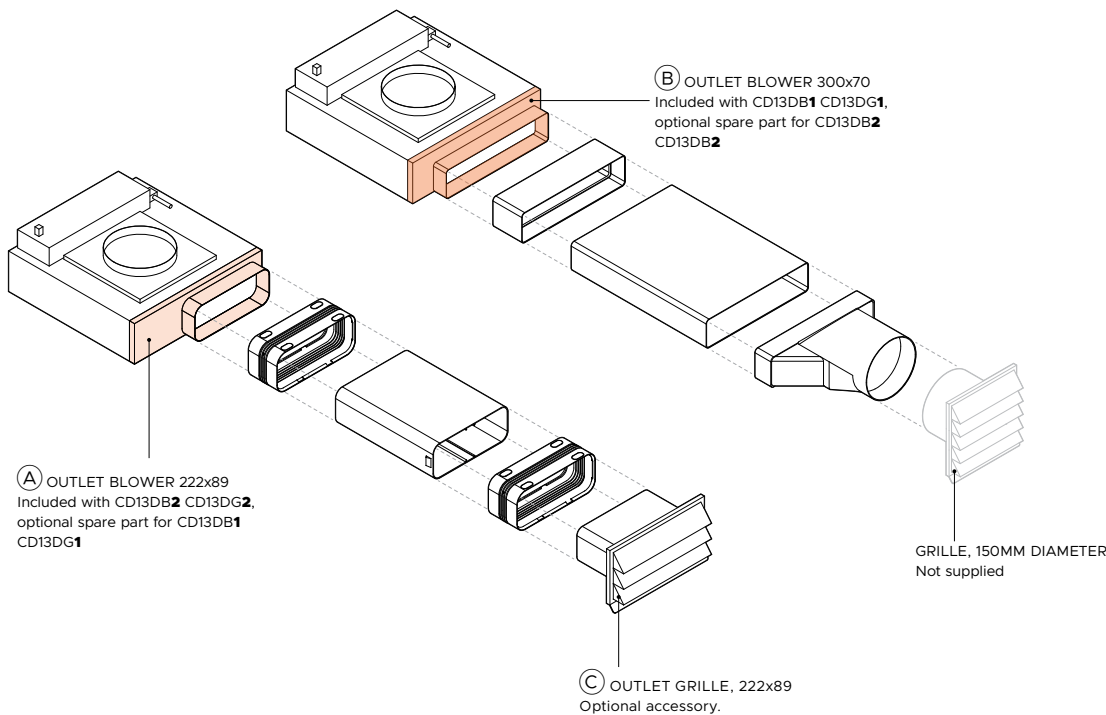

RECIRCULATED

OVERVIEW WITH RECIRCULATION KIT

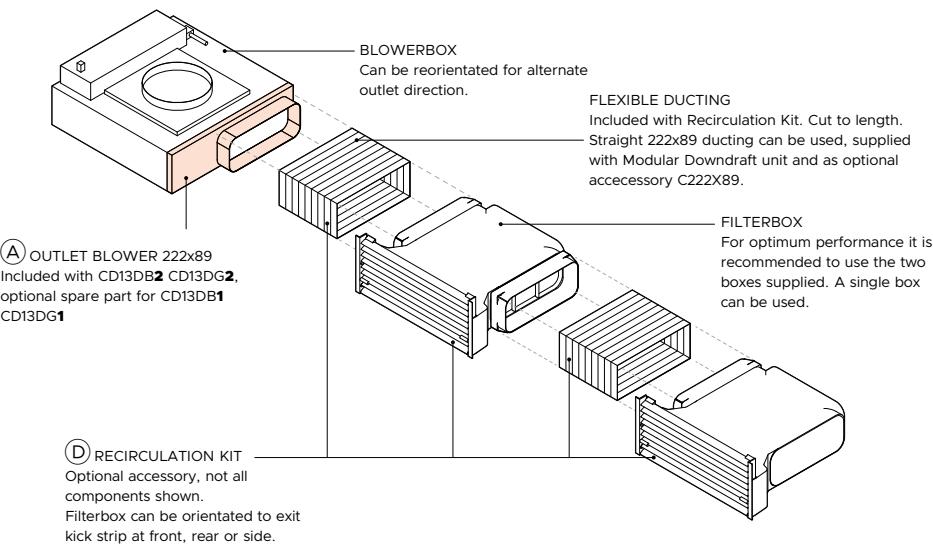

| Optional Accessory |                                  | Part Number |
|--------------------|----------------------------------|-------------|
| A                  | Outlet Adaptor, Blower, 222x89mm | OAB222X89   |
| B                  | Outlet Adaptor, Blower, 300x70mm | OAB300X70   |
| C                  | Outlet Grille, 222x89mm          | DO-G-SS     |
| D                  | Recirculation Kit                | KRCID834    |


CRITICAL NOTE

Indicative layouts, other configurations are possible. It is essential to work with CAD downloads of modular ventilation components to design a ducting layout best suited to specific cabinetry requirements. For design planning and installation support please contact the Fisher & Paykel design support team. [designsupport@fisherpaykel.com](mailto:designsupport@fisherpaykel.com)

RECIRCULATION KIT

The filter boxes of the Recirculation Kit fit within the toe kick cavity of cabinets. The vents need to be positioned to allow venting of recirculated air into the room. Vents can be positioned in the kick strip, at ends of cabinets or the rear of an island bench. Air must not be recirculated within the cabinetry. For additional layout options and installation details refer to the Installation guide.


The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](http://fisherpaykel.com)




TOP VIEW




FRONT VIEW



TOP VIEW




FRONT VIEW




TOP VIEW



FRONT VIEW



TOP VIEW



FRONT VIEW

— POWER CABLE  
• COMMUNICATION PORT

PRIMARY MODULAR INDUCTION HOB, 39CM, 2 ZONES  
WITH SMARTZONE

Model no:  
CI392DTTB1 Black  
CI392DTTG1 Grey



| Dimensions  | mm   |
|-------------|------|
| Power Cable | 1700 |

PRIMARY MODULAR INDUCTION HOB, 60CM, 4  
ZONES WITH SMARTZONE

Model no:  
CI392DTTB1 Black  
CI392DTTG1 Grey



| Dimensions  | mm           |
|-------------|--------------|
| Power Cable | not supplied |

PRIMARY MODULAR INDUCTION HOB, 76CM, 4 ZONES  
WITH SMARTZONE

Model no:  
CI392DTTB1 Black  
CI392DTTG1 Grey



| Dimensions  | mm           |
|-------------|--------------|
| Power Cable | not supplied |

PRIMARY MODULAR INDUCTION HOB, 90CM, 5  
ZONES WITH SMARTZONE

Model no:  
CI392DTTB1 Black  
CI392DTTG1 Grey



| Dimensions  | mm           |
|-------------|--------------|
| Power Cable | not supplied |

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://fisherpaykel.com)

TOP VIEW

FRONT VIEW

— EXTERNAL COMMUNICATION HARNESS  
— CENTRAL COMMUNICATION HARNESS  
— POWER CABLE

**AUXILIARY MODULAR INDUCTION HOB, 30CM, 2 ZONES WITH SMARTZONE**

Model no:  
**CI302DB1** Black  
**CI302DG1** Grey

| Dimensions                      | mm   |
|---------------------------------|------|
| External Communication Harness* | 500  |
| Power Cable*                    | 1700 |

\* x1 supplied with each auxiliary unit

TOP VIEW

FRONT VIEW

Model no:  
**CIT302DX1**

| Dimensions                      | mm   |
|---------------------------------|------|
| External Communication Harness* | 500  |
| Power Cable*                    | 1700 |

\* x1 supplied with each auxiliary unit

TOP VIEW

FRONT VIEW

Model no:  
**CI392DB1** Black  
**CI392DG1** Grey

| Dimensions                      | mm   |
|---------------------------------|------|
| External Communication Harness* | 500  |
| Power Cable*                    | 1700 |

\* x1 supplied with each auxiliary unit

TOP VIEW

FRONT VIEW

Model no:  
**CI392DX1**

| Dimensions                      | mm   |
|---------------------------------|------|
| External Communication Harness* | 500  |
| Power Cable*                    | 1700 |

\* x1 supplied with each auxiliary unit

TOP VIEW


FRONT VIEW

Model no:  
**CD13DB1** Black, **CD13DG1** Grey  
**CD13DB2** Black, **CD13DG2** Grey


| Dimensions                      | mm   |
|---------------------------------|------|
| External Communication Harness* | 500  |
| Central Communication Harness*  | 1700 |
| Power Cable                     | 3000 |

\* x1 supplied with each auxiliary unit

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://fisherpaykel.com)

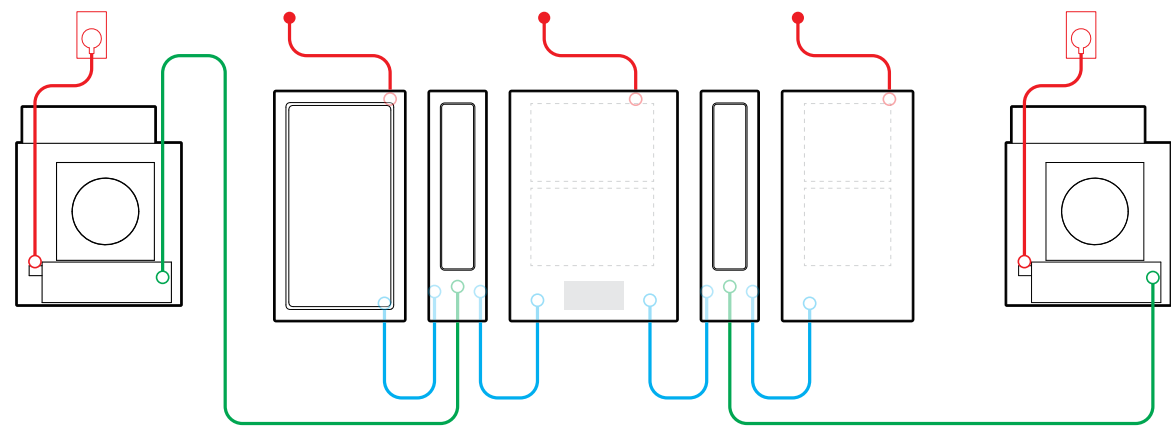

TOP VIEW

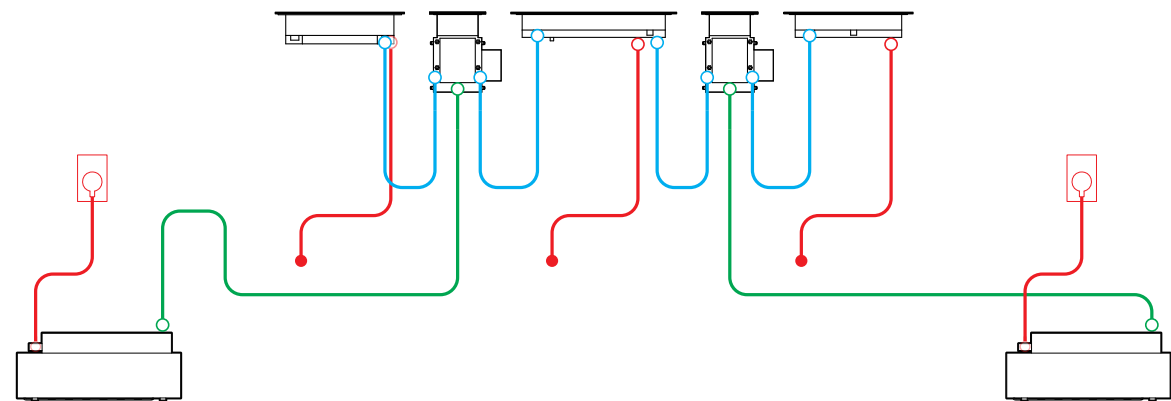

FRONT VIEW

SUPPLIED HARNESS

External communication harnesses connect auxiliary modules to the primary module. These connections must be to the product directly adjacent in a 'daisy chain' configuration (refer diagram).

1x External communication harness is supplied with each auxiliary module (induction, teppanyaki and downdraft ventilation).

1x Central communication harness is supplied with auxiliary modular ventilation to connect downdraft mainbox with blowerbox.

- EXTERNAL COMMUNICATION HARNESS
- CENTRAL COMMUNICATION HARNESS
- POWER CABLE

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://fisherpaykel.com)

