

HWF12ECW1, HWF12ECB1

12kg 300 Series Front Loader Washer

Haier



HWF12ECW1



HWF12ECB1

Height

850-865mm

Width

595mm

Depth

661mm

Weight (Packaged)

73kg

Weight (Product)

69kg


FEATURES

- Generous 12kg capacity fits bedding, towels and larger family loads together.
- 5-star energy and 4.5-star water ratings support more efficient wash days.
- Express 15 washes a small load in just 15 minutes.
- Add a Garment lets you pause the cycle to add forgotten items.
- Extra Rinse adds a second rinse for towels, bedding and absorbent fabrics.
- Refresh uses steam to help reduce odours and creases with minimal water and energy.
- Eleven programmes include Wool, Delicate, Bedding, Cotton, Synthetics and Mixed.
- Auto Load Sensing matches water use and cycle length to the load.
- Anti-Bacterial Treatment helps keep the door-gasket area hygienic.

The models shown in this Specification Guide (SG) may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This SG should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website haier.com


Product Overview

PRODUCT DIMENSIONS

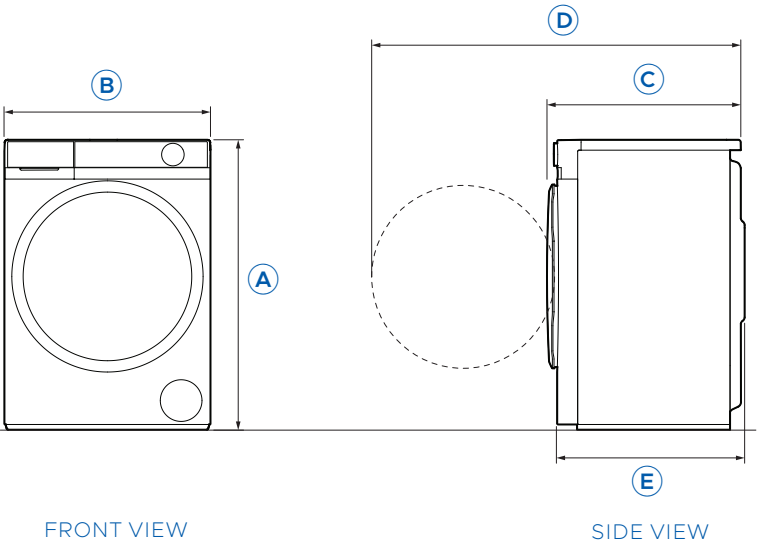

		mm
A	Overall height	850
B	Overall width	595
C	Overall depth (door closed)	661
D	Overall depth (door open)	1151
E	Overall depth (excluding door)	641

CAVITY DIMENSIONS

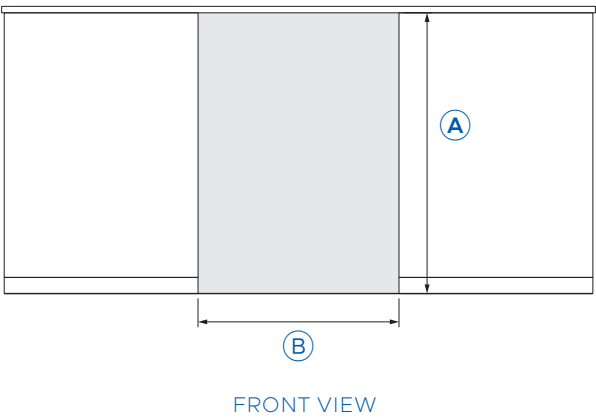


		mm
A	Minimum height of cavity	875
B	Minimum width of cavity	635
C	Minimum clearance at back of cavity	30
D	Minimum depth of cavity (excluding product door)	673
E	Minimum clearance at front of cavity for in cupboard	40
F	Minimum depth of cavity in cupboard	731

Note: If installing behind a cabinetry door, it must be hinged on the same side as the washing machine. There must be a minimum clearance of 30mm from the front of the washing machine door to the internal face of the cabinetry door for the product to operate safely.

The enclosed space must be provided with sufficient ventilation to meet local building code requirements or the door must be open while the product is operating.

SERVICES

- Supply220 - 240 V, 50 Hz
- Service10 A
- ConnectionFlex cord with plug

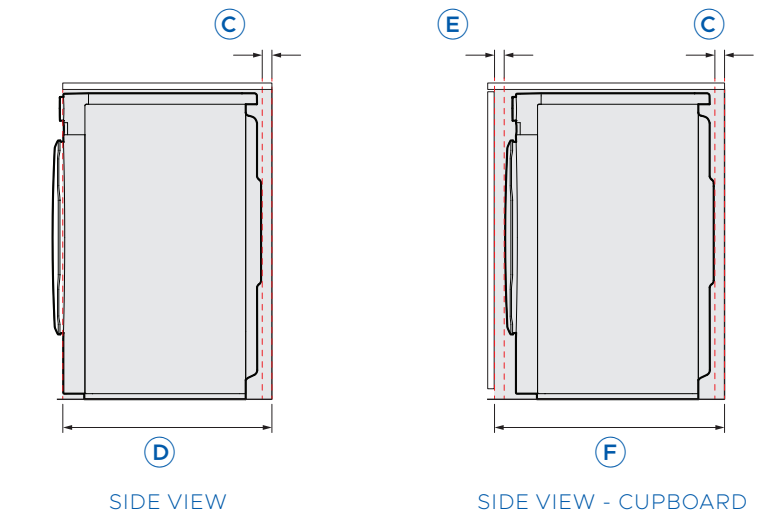

The models shown in this Specification Guide (SG) may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This SG should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website haier.com