
COMBI-MICROWAVE OVEN INSTALLATION CONSIDERATIONS

Accessing your product specifications	3
Electrical connection	4

FISHER & PAYKEL

CN

MINIMAL



OM60NMUNB5, OM60NMTB5



For full product, cabinetry and service specifications, refer to the Planning Guide. To access the Planning Guide, scan the QR code or visit fisherpaykel.com/specify. Search by appliance type, product name or model code.

MINIMAL MODELS

OM60NMUNB5, OM60NMTB5

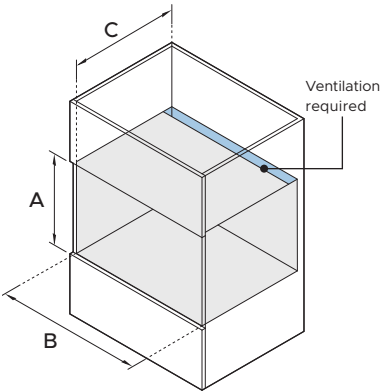

PRODUCT DIMENSIONS		mm
A	Overall height	458
B	Overall width	596
C	Chassis height	435
D	Chassis width	556
E	Chassis depth	545
F	Control panel thickness	20
	Depth with door fully open*	324

*Measured from front of control panel.

CAVITY DIMENSIONS		mm
A	Minimum inside height of cavity	440
B	Minimum inside width of cavity	560
C	Minimum inside depth of cavity*	550**
	Recommended cabinet height	460
	Recommended cabinet width	600

*Excluding control panel thickness.

**Requires ventilation at the rear of the cavity.

ELECTRICAL CONNECTION

SPECIFICATIONS	OM60 MODELS
RATED POWER (W)	3800
Hz	50
VOLTAGE (V)	220 – 240V
MICROWAVE RATED INPUT (W)	2000
MICROWAVE RATED OUTPUT (W)	900
MICROWAVE FREQUENCY (MHz)	2450

