

MODULAR COOKTOPS

PLANNING GUIDE

CI152DTT | CI244DTT | CI304DTT | CI365DTT | CI122D | CI152D | CIT122D |
CIT152D | CG151D | CD5D

FISHER & PAYKEL

This comprehensive planning guide provides you with the framework and tools to achieve your desired design outcome with Fisher & Paykel appliances. In this guide, you will find a range of conceptual, detailed, and dimensional product information to bring your ideas to life and create spaces that truly reflect your vision.

CONTENTS

CONCEPT DESIGN	PAGE	DEVELOPED AND DETAILED DESIGN	PAGE	DEVELOPED AND DETAILED DESIGN	PAGE
Specification Guide	3	Data Sheets	8	Planning Considerations	29
System Overview	4	Primary Induction Cooktop, 15"	9	Installation Overview	30
Primary Modules	5	Primary Induction Cooktop, 24"	10	Combined Installation	31
Auxiliary Modules	6	Primary Induction Cooktop, 30"	11	Typical Configurations with Modular Ventilation	32
		Primary Induction Cooktop, 36"	12	Typical Configurations with Overhead Ventilation	33
		Auxiliary Induction Cooktop, 12"	13	Countertop Details	34
		Auxiliary Teppanyaki Cooktop, 12"	14	Clamping Locations	35
		Auxiliary Induction Cooktop, 15"	15	Cooktop Ventilation	36
		Auxiliary Teppanyaki Cooktop, 15"	16	Installation with Built in Ovens	37
		Gas on Glass Modular Cooktop, 15"	17	Modular Ventilation	38
		Auxiliary Ventilation, 5"	18	Common Ducting Scenarios	39
		Recirculation Kit	22	Duct Length Recommendations	40
				Blowerbox Cabinetry	41
		Product Decisions	24	Electrical Services	42
		Modular System Capabilities	25	Modular Connections	44
		Modular System Options	26		
		Pairing Guide	27		
		Modular Ventilation Capabilities	28		

IMPORTANT NOTE

DO NOT install the cooktop directly above a dishwasher, fridge, freezer, washing machine or clothes dryer, as the humidity may damage the cooktop electronics.

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

SPECIFICATION GUIDE



OVERVIEW

Create the ultimate culinary solution with our Series 9 and 11 modular cooktops. Using the different induction, teppan, ventilation and gas modules, you can customize the cooking area at the scale and format best suited to architectural plan and user needs. Fusing precise induction technology with innovative design, these modules are crafted to seamlessly work together for perfect results.

FEATURES

- ① Tailor the cooking space by pairing primary induction cooktop modules with complementary auxiliary cooktops, downdraft ventilation and gas on glass modules.
- ② Control the auxiliary modular suite from the primary cooktop using a large intuitive touchscreen.
- ③ Each module is designed to fit flush or raised with the countertop for complete design freedom.
- ④ SmartHQ™ app connectivity to monitor product and cook status.

- ⑤ Wireless Temperature Sensor precisely monitors and controls cooking in real time, for complete control.*
- ⑥ Poach, Sous Vide and other Cook by Method functions are available on product, when using the Wireless Temperature Sensor.
- ⑦ Gas on Glass is independently controlled via a manual dial for precise and flexible cooking options
- * Selected models only.

PRODUCT OVERVIEW

PRIMARY MODULAR INDUCTION COOKTOPS

With touchscreen user interface

- CI152DTTB1
Primary Modular Induction Cooktop, 15", 2 Zones with SmartZone
- CI244DTTB1
Primary Modular Induction Cooktop, 24", 4 Zones with SmartZone
- CI304DTTB1
Primary Modular Induction Cooktop, 30", 4 Zones with SmartZone
- CI365DTTB1
Primary Modular Induction Cooktop, 36", 5 Zones with SmartZone

AUXILIARY MODULAR COOKTOPS

No user interface. Controlled via paired primary cooktop.

- CI122DB1
Auxiliary Modular Induction Cooktop, 12", 2 Zones with SmartZone
- CI152DB1
Auxiliary Modular Induction Cooktop, 15", 2 Zones with SmartZone

- CIT122DX1
Auxiliary Modular Teppanyaki Cooktop, 12", 2 Zones
- CIT152DX1
Auxiliary Modular Teppanyaki Cooktop, 15", 2 Zones

AUXILIARY MODULAR VENTILATION

No user interface. Controlled via paired primary cooktop.

- CD5DB1
Auxiliary Modular Ventilation, 5", Duct Out

GAS ON GLASS MODULAR COOKTOP



Dial control, independently controlled.

- CG151DLPGB5
Gas on Glass Modular Cooktop, 15", LPG
- CG151DNGB5
Gas on Glass Modular Cooktop, 15", Natural Gas

ACCESSORIES

- WTSC1
Wireless Temperature Sensor (1x included per Primary Modular Induction Cooktop. Also available to purchase separately).
- OAD225X12
Mainbox Outlet Adapter, 2.25" x 12"
- OAB225X12
Blower Outlet Adapter, 2.25" x 12"
- KRECIRCDDFT
Recirculation Kit



The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com



PRIMARY MODULAR INDUCTION COOKTOP, 15",
2 ZONES WITH SMARTZONE

Model no:
CI152DTTB1



Dimensions	W x D x H	
	in	mm
Product	15 5/32 x 20 7/8 x 2 7/16	385 x 530 x 62
Glass	15 5/32 x 20 7/8 x 1/4	385 x 530 x 6
Proud cutout	13 11/16 x 19 31/32	347 x 507
Flush cutout	13 11/16 x 20 1/32	347 x 509
Flush recess	15 5/16 x 21 1/32 x 1/4	389 x 534 x 6.5
Power Requirements		
Supply	208 / 240 V, 60 Hz	
Service	15 A	
Connection	No plug, flex cord with stripped ends	
Power Cable	74 13/16" (1900mm)	
Weight	18lb / 8kg	

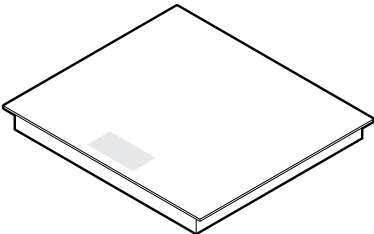

PRIMARY MODULAR INDUCTION COOKTOP, 24",
4 ZONES WITH SMARTZONE

Model no:
CI244DTTB1



Dimensions	W x D x H	
	in	mm
Product	23 5/8 x 20 7/8 x 3 1/2	600 x 530 x 89
Glass	23 5/8 x 20 7/8 x 1/4	600 x 530 x 6
Proud cutout	22 1/8 x 19 31/32	562 x 507
Flush cutout	22 1/8 x 20 1/32	562 x 509
Flush recess	23 25/32 x 21 1/32 x 1/4	604 x 534 x 6.5
Power Requirements		
Supply	208 / 240 V, 60 Hz	
Service	30 A	
Connection	No plug, flex metal conduit with stripped ends	
Power Cable	54 5/16" (1380mm)	
Weight	31lb / 14kg	

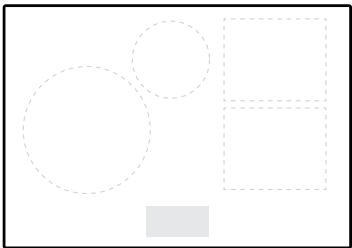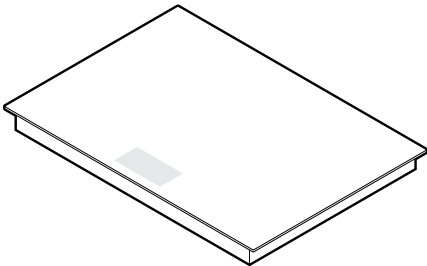

PRIMARY MODULAR INDUCTION COOKTOP, 30",
4 ZONES WITH SMARTZONE

Model no:
CI304DTTB1

Dimensions	W x D x H	
	in	mm
Product	29 15/16 x 20 7/8 x 3 1/2	760 x 530 x 89
Glass	29 15/16 x 20 7/8 x 1/4	760 x 530 x 6
Proud cutout	28 7/16 x 19 31/32	722 x 507
Flush cutout	28 7/16 x 20 1/32	722 x 509
Flush recess	30 3/32 x 21 1/32 x 1/4	764 x 534 x 6.5
Power Requirements		
Supply	208 / 240 V, 60 Hz	
Service	30 A	
Connection	No plug, flex metal conduit with stripped ends	
Power Cable	54 5/16" (1380mm)	
Weight	36lb / 16kg	

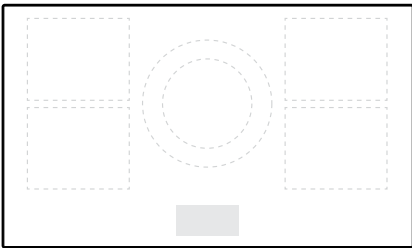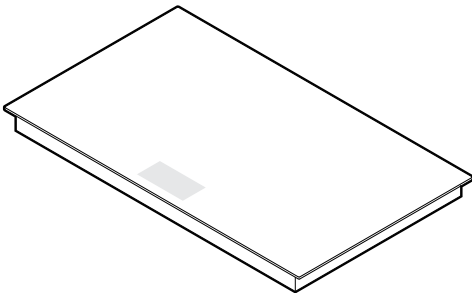


PRIMARY MODULAR INDUCTION COOKTOP, 36",
5 ZONES WITH SMARTZONE

Model no:
CI365DTTB1

Dimensions	W x D x H	
	in	mm
Product	35 7/16 x 20 7/8 x 3 1/2	900 x 530 x 89
Glass	35 7/16 x 20 7/8 x 1/4	900 x 530 x 6
Proud cutout	33 15/16 x 19 31/32	862 x 507
Flush cutout	33 15/16 x 20 1/32	862 x 509
Flush recess	35 19/32 x 21 1/32 x 1/4	904 x 534 x 6.5
Power Requirements		
Supply	208 / 240 V, 60 Hz	
Service	45 A	
Connection	No plug, flex metal conduit with stripped ends	
Power Cable	54 5/16" (1380mm)	
Weight	43lb / 20kg	

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

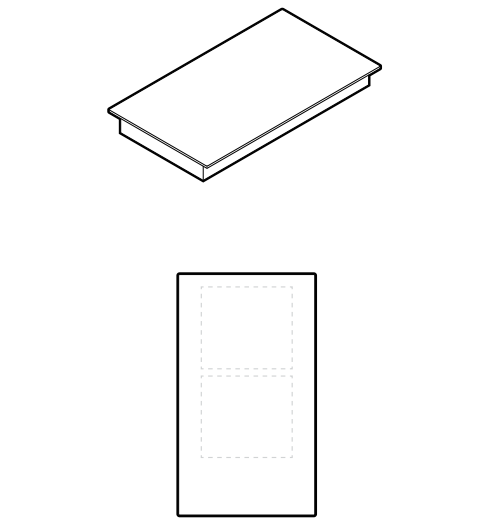


AUXILIARY MODULAR INDUCTION COOKTOP, 12",
2 ZONES WITH SMARTZONE

Model no:
CI122DB1

Dimensions	W x D x H	
	in	mm
Product	11 13/16 x 20 7/8 x 2 7/16	300 x 530 x 62
Glass	11 13/16 x 20 7/8 x 1/4	300 x 530 x 6
Proud cutout	10 5/16 x 19 31/32	262 x 507
Flush cutout	10 5/16 x 20 1/32	262 x 509
Flush recess	11 31/32 x 21 1/32 x 1/4	304 x 534 x 6.5

Power Requirements	
Supply	208 / 240 V, 60 Hz
Service	15 A
Connection	No plug, flex cord with stripped ends
Power Cable	74 13/16" (1900mm)

Weight	15lb / 7kg
--------	------------

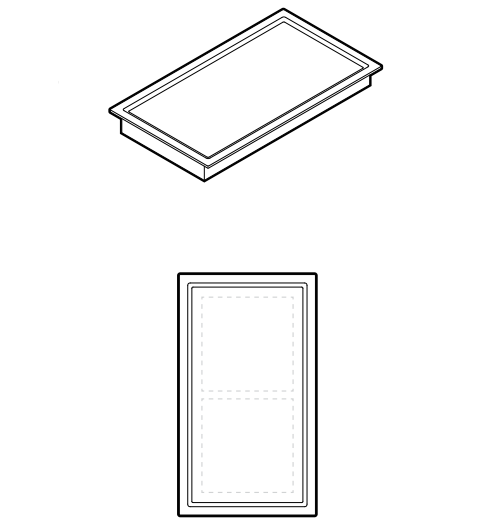


AUXILIARY MODULAR TEPPANYAKI COOKTOP, 12",
2 ZONES

Model no:
CIT122DX1

Dimensions	W x D x H	
	in	mm
Product	11 13/16 x 20 7/8 x 2 15/16	300 x 530 x 74
Plate	11 13/16 x 20 7/8 x 1/4	300 x 530 x 6
Proud cutout	10 5/16 x 19 31/32	262 x 507
Flush cutout	10 5/16 x 20 1/32	262 x 509
Flush recess	11 31/32 x 21 1/32 x 1/4	304 x 534 x 6.5

Power Requirements	
Supply	208 / 240 V, 60 Hz
Service	15 A
Connection	No plug, flex cord with stripped ends
Power Cable	74 13/16" (1900mm)

Weight	27lb / 12kg
--------	-------------

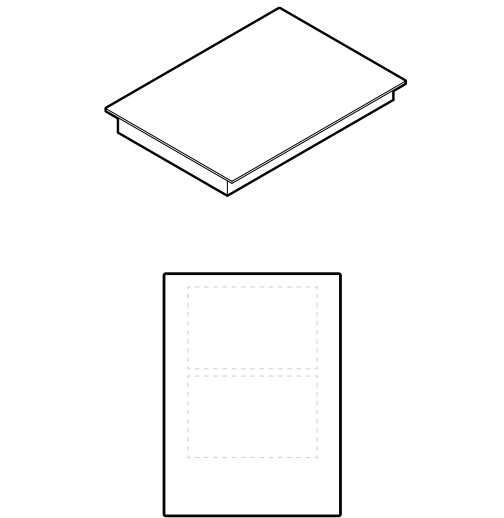


AUXILIARY MODULAR INDUCTION COOKTOP, 15",
2 ZONES WITH SMARTZONE

Model no:
CI152DB1

Dimensions	W x D x H	
	in	mm
Product	15 5/32 x 20 7/8 x 2 7/16	385 x 530 x 62
Glass	15 5/32 x 20 7/8 x 1/4	385 x 530 x 6
Proud cutout	13 11/16 x 19 31/32	347 x 507
Flush cutout	13 11/16 x 20 1/32	347 x 509
Flush recess	15 5/16 x 21 1/32 x 1/4	389 x 534 x 6.5

Power Requirements	
Supply	208 / 240 V, 60 Hz
Service	15 A
Connection	No plug, flex cord with stripped ends
Power Cable	74 13/16" (1900mm)

Weight	18lb / 8kg
--------	------------

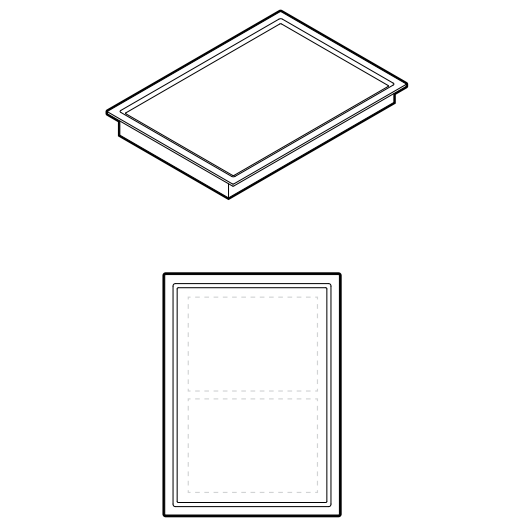

AUXILIARY MODULAR TEPPANYAKI COOKTOP, 15",
2 ZONES



Model no:
CIT152DX1

Dimensions	W x D x H	
	in	mm
Product	15 5/32 x 20 7/8 x 2 15/16	385 x 530 x 74
Plate	15 5/32 x 20 7/8 x 1/4	385 x 530 x 6
Proud cutout	13 11/16 x 19 31/32	347 x 507
Flush cutout	13 11/16 x 20 1/32	347 x 509
Flush recess	15 5/16 x 21 1/32 x 1/4	389 x 534 x 6.5

Power Requirements	
Supply	208 / 240 V, 60 Hz
Service	15 A
Connection	No plug, flex cord with stripped ends
Power Cable	74 13/16" (1900mm)

Weight	32lb / 15kg
--------	-------------



The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com



GAS ON GLASS MODULAR COOKTOP, 15"

Model no:
CG151DLPGB5 LPG
CG151DNGGB5 Natural Gas

Dimensions	W x D x H	
	in	mm
Product (excl. trivets)	15 5/32 x 20 7/8 x 2 9/16	385 x 530 x 65
Glass	15 5/32 x 20 7/8 x 1/4	385 x 530 x 6
Proud cutout	13 11/16 x 19 31/32	347 x 507
Flush cutout	13 11/16 x 20 1/32	347 x 509
Flush recess	15 5/16 x 21 1/32 x 1/4	389 x 534 x 6.5
Power Requirements		
Supply	120 V, 60 Hz	
Service	15 A	
Connection	Plug	
Gas Requirements		
Supply	1/2" BSP minimum internal Ø 10mm flex line	
Inlet	1/2" BSP	
Weight	18lb / 8kg	



AUXILIARY MODULAR VENTILATION, 5"

Model no:

CD5DB1

Dimensions	W x D x H	
	in	mm
Product	5 1/8 x 20 7/8 x 7 3/8	130 x 530 x 186
Glass	5 1/8 x 20 7/8 x 1/4	130 x 530 x 6
Proud cutout	3 7/8 x 19 31/32	98 x 507
Flush cutout	3 7/8 x 20 1/32	98 x 509
Flush recess	5 9/32 x 21 1/32 x 1/4	134 x 534 x 6.5
Power Requirements		
Supply	120 V, 60 Hz	
Service	5 A	
Connection	Flex cord, 3-pin plug	
Power Cable	28" (720mm)	
Weight	7lb / 3kg	

* Must be installed in combined cutout with cooktop


ELECTRICAL SERVICE FOR MULTIPLE PRODUCT INSTALLS

Where multiple products are being installed together, it is possible to use a smaller local distribution board, rather than running multiple separate lines. For example, 2 x 15 A modules can be connected via a single 30 A breaker.

This cooktop must be connected to the mains power supply only by a suitably qualified person.

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

DATA SHEETS

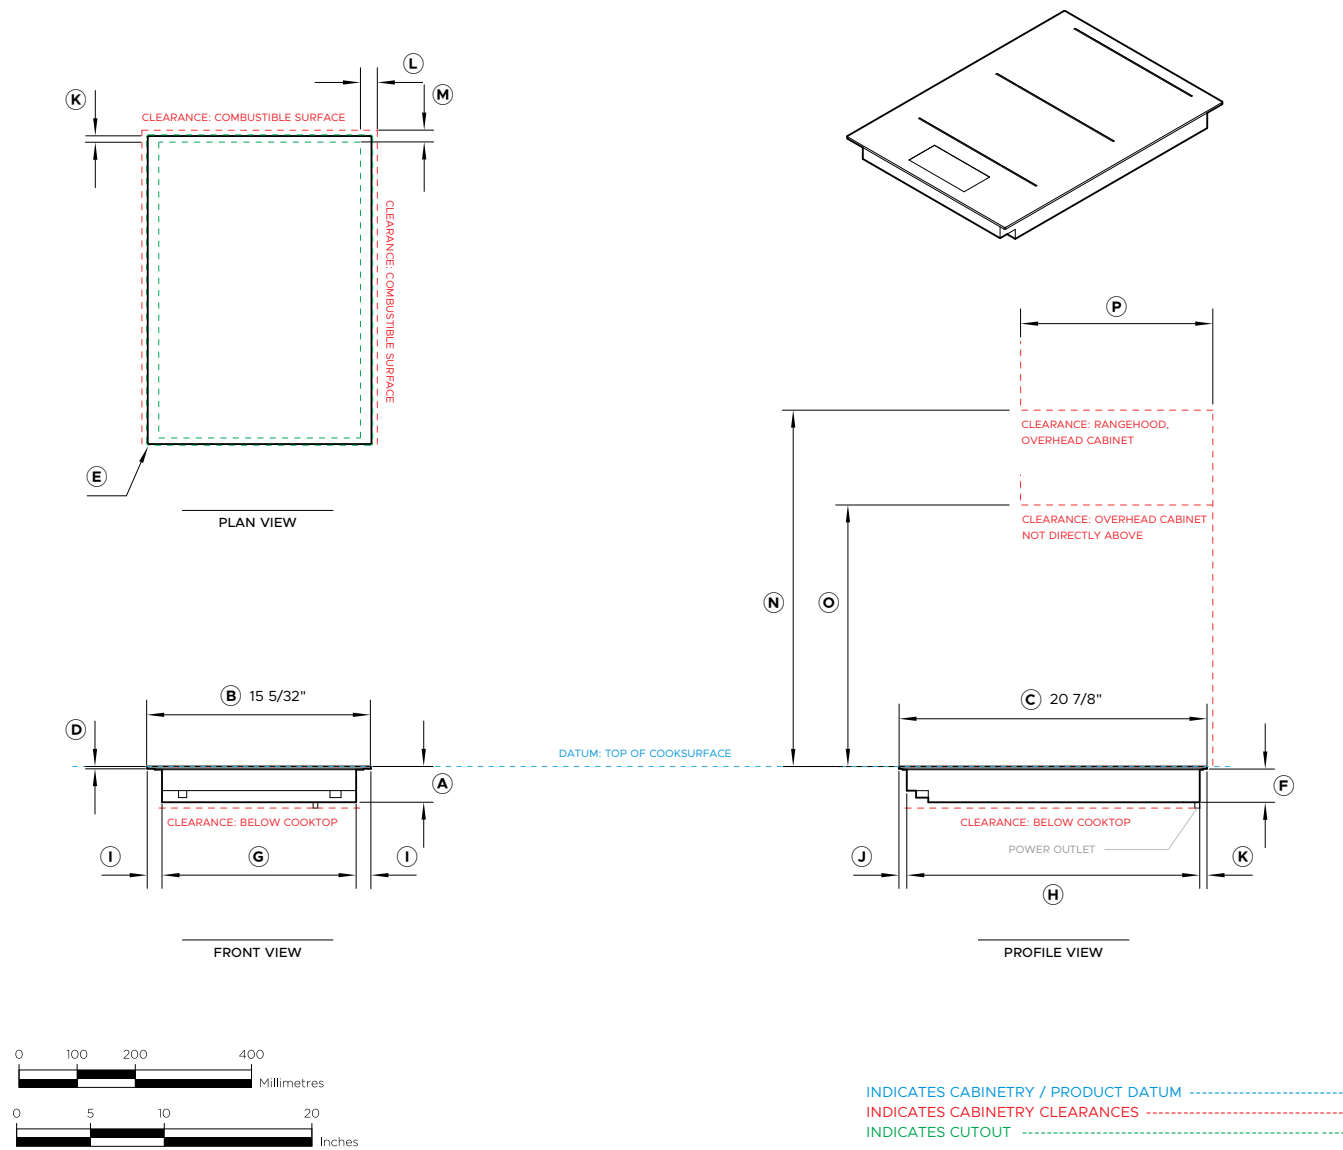

Model no:
Primary Modular Induction Cooktop, 15", 2 Zones with SmartZone, Black - C1152DTTB1

Product Dimensions	in	mm
A Overall height of cooktop	2 7/16	62
B Overall width of cooktop	15 5/32	385
C Overall depth of cooktop	20 7/8	530
D Height of cooktop glass (includes flange and tape)	1/4	6
E Corner radius of glass	1/16	2
F Height of chassis	2 3/16	56
G Width of chassis	13 1/8	334
H Depth of chassis	19 13/16	504
I Width from side edges of cooktop to chassis	1	26
J Depth from front edge of cooktop to chassis	17/32	13.5
K Depth from back edge of cooktop to chassis	1/2	12.5


Product Clearances	in	mm
L Minimum clearance from side edges of cutout to nearest combustible surface	1 3/16	29
M Minimum clearance from rear edge of cutout to nearest combustible surface	7/8	21
N Minimum clearance from glass cook surface to: Overhead cabinet centered above the cooktop (unprotected) Overhead cabinet centered above the cooktop (protected) Range hood	24	610
O Minimum clearance from glass cook surface to overhead cabinet not directly above cooktop	17 3/4	450
P Maximum depth of unprotected overhead cabinets from rear clearance	13	330
Minimum ventilation gap between bottom of countertop and top of cabinetry fronts (not shown)	5/32	4
Minimum clearance from glass cook surface to top of any appliances, companion product or obstruction below cooktop	2 7/8	72

NOTE: The oven installed below the cooktop MUST have a cooling fan. It is important that the induction cooktop receives adequate air supply. For ventilation requirements please refer to the installation manual.

Cutout Dimensions*	Proud in	Proud mm	Flush in	Flush mm
Overall width of cutout	13 11/16	347	13 11/16	347
Overall depth of cutout	19 31/32	507	20 1/32	509
Overall width of recess	-	-	15 5/16	389
Overall depth of recess	-	-	21 1/32	534
Overall height of recess	-	-	1/4	6.5
Recess corner radius	-	-	5/32	4

*Note cutout position is centered to the cooktop.

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

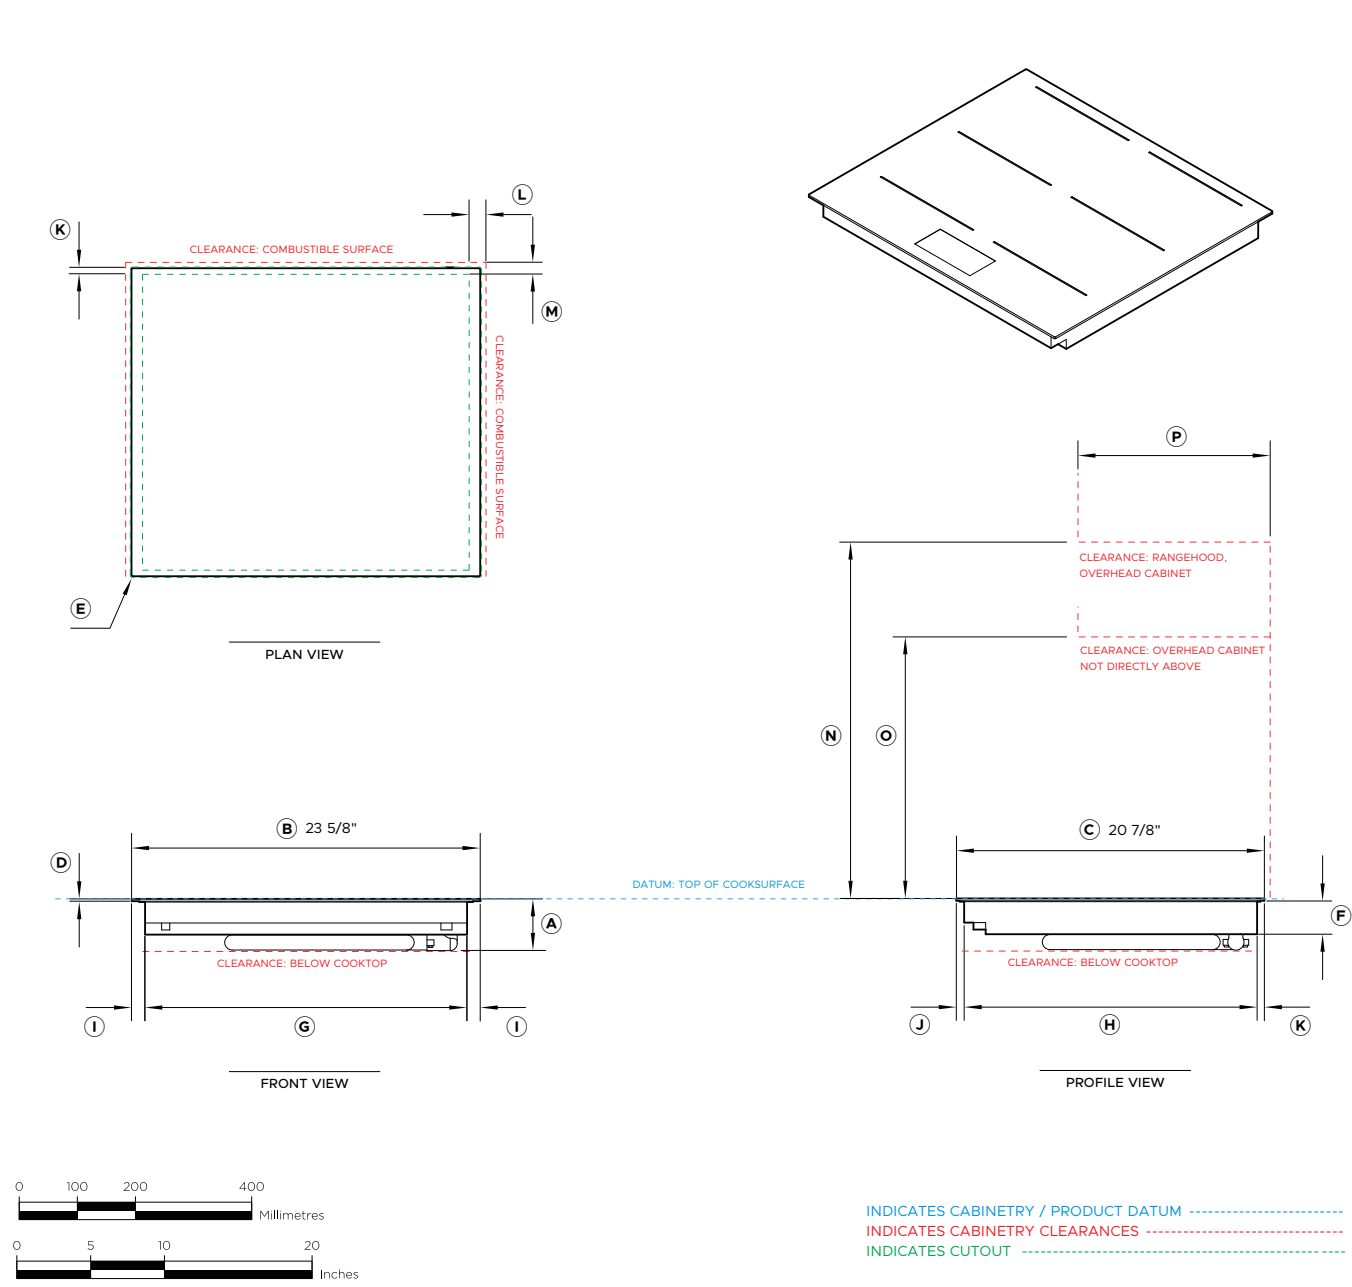

Model no:

Primary Modular Induction Cooktop, 24", 4 Zones with SmartZone, Black - CI244DTTB1


Product Dimensions		in	mm
A	Overall height of cooktop	3 1/2	89
B	Overall width of cooktop	23 5/8	600
C	Overall depth of cooktop	20 7/8	530
D	Height of cooktop glass (includes flange and tape)	1/4	6
E	Corner radius of glass	1/16	2
F	Height of chassis	2 3/16	56
G	Width of chassis	21 13/16	554
H	Depth of chassis	19 13/16	504
I	Width from side edges of cooktop to chassis	1	23
J	Depth from front edge of cooktop to chassis	17/32	13.5
K	Depth from back edge of cooktop to chassis	1/2	12.5
Product Clearances		in	mm
L	Minimum clearance from side edges of cutout to nearest combustible surface	1 3/16	29
M	Minimum clearance from rear edge of cutout to nearest combustible surface	7/8	21
N	Minimum clearance from glass cook surface to: Overhead cabinet centered above the cooktop (unprotected) Overhead cabinet centered above the cooktop (protected) Range hood	24	610
O	Minimum clearance from glass cook surface to overhead cabinet not directly above cooktop	17 3/4	450
Minimum ventilation gap between bottom of countertop and top of cabinetry fronts (not shown)		5/32	4
Minimum clearance from glass cook surface to top of any appliances, companion product or obstruction below cooktop		3 5/8	91

NOTE: The oven installed below the cooktop MUST have a cooling fan. It is important that the induction cooktop receives adequate air supply. For ventilation requirements please refer to the installation manual.

Cutout Dimensions*	proud in	proud mm	flush in	flush mm
Overall width of cutout	22 1/8	562	22 1/8	562
Overall depth of cutout	19 31/32	507	20 1/32	509
Overall width of recess	-	-	23 25/32	604
Overall depth of recess	-	-	21 1/32	534
Overall height of recess	-	-	1/4	6.5
Recess corner radius	-	-	5/32	4

*Note cutout position is centered to the cooktop.

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

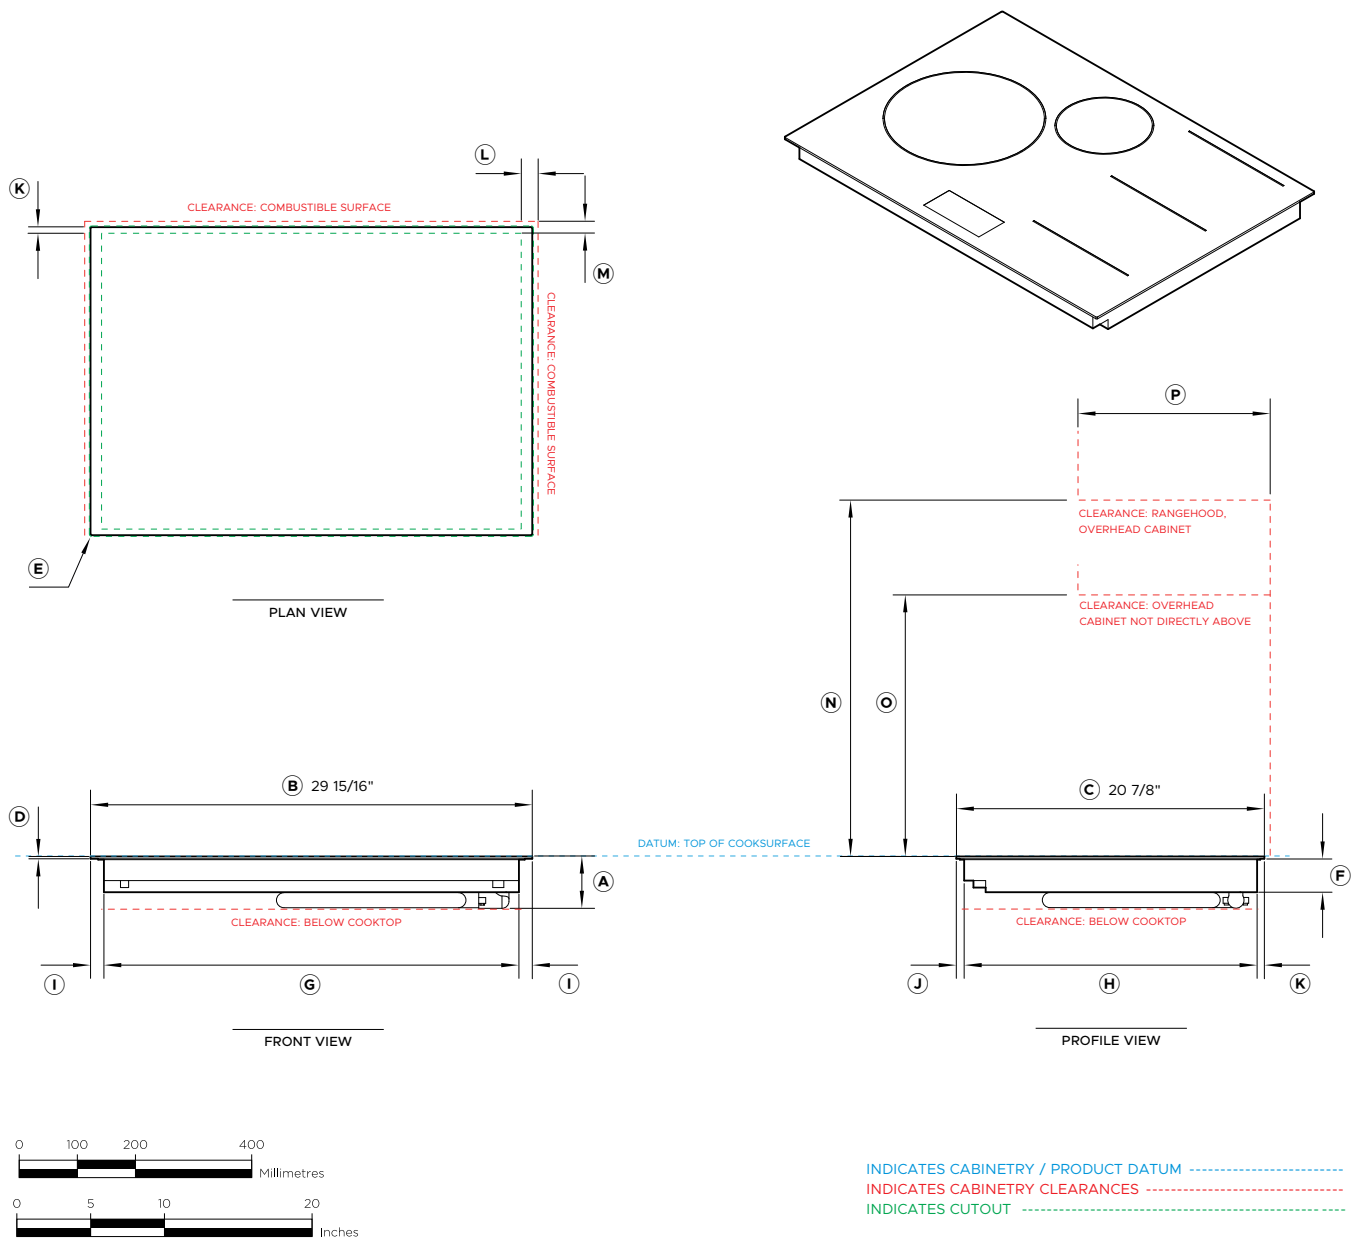

Model no:

Primary Modular Induction Cooktop, 30", 4 Zones with SmartZone, Black - CI304DTTB1


Product Dimensions		in	mm
A	Overall height of cooktop	3 1/2	89
B	Overall width of cooktop	29 15/16	760
C	Overall depth of cooktop	20 7/8	530
D	Height of cooktop glass (includes flange and tape)	1/4	6
E	Corner radius of glass	1/16	2
F	Height of chassis	2 3/16	56
G	Width of chassis	28 1/8	714
H	Depth of chassis	19 13/16	504
I	Width from side edges of cooktop to chassis	1	23
J	Depth from front edge of cooktop to chassis	17/32	14
K	Depth from back edge of cooktop to chassis	1/2	13
Product Clearances		in	mm
L	Minimum clearance from side edges of cutout to nearest combustible surface	1 3/16	29
M	Minimum clearance from rear edge of cutout to nearest combustible surface	7/8	21
N	Minimum clearance from glass cook surface to: Overhead cabinet centered above the cooktop (unprotected) Overhead cabinet centered above the cooktop (protected) Range hood	24	610
O	Minimum clearance from glass cook surface to overhead cabinet not directly above cooktop	17 3/4	450
Minimum ventilation gap between bottom of countertop and top of cabinetry fronts (not shown)		5/32	4
Minimum clearance from glass cook surface to top of any appliances, companion product or obstruction below cooktop		3 5/8	91

NOTE: The oven installed below the cooktop MUST have a cooling fan. It is important that the induction cooktop receives adequate air supply. For ventilation requirements please refer to the installation manual.

Cutout Dimensions*	proud in	proud mm	flush in	flush mm
Overall width of cutout	28 7/16	722	28 7/16	722
Overall depth of cutout	19 31/32	507	20 1/32	509
Overall width of recess	-	-	30 3/32	764
Overall depth of recess	-	-	21 1/32	534
Overall height of recess	-	-	1/4	6.5
Recess corner radius	-	-	5/32	4

*Note cutout position is centered to the cooktop.

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

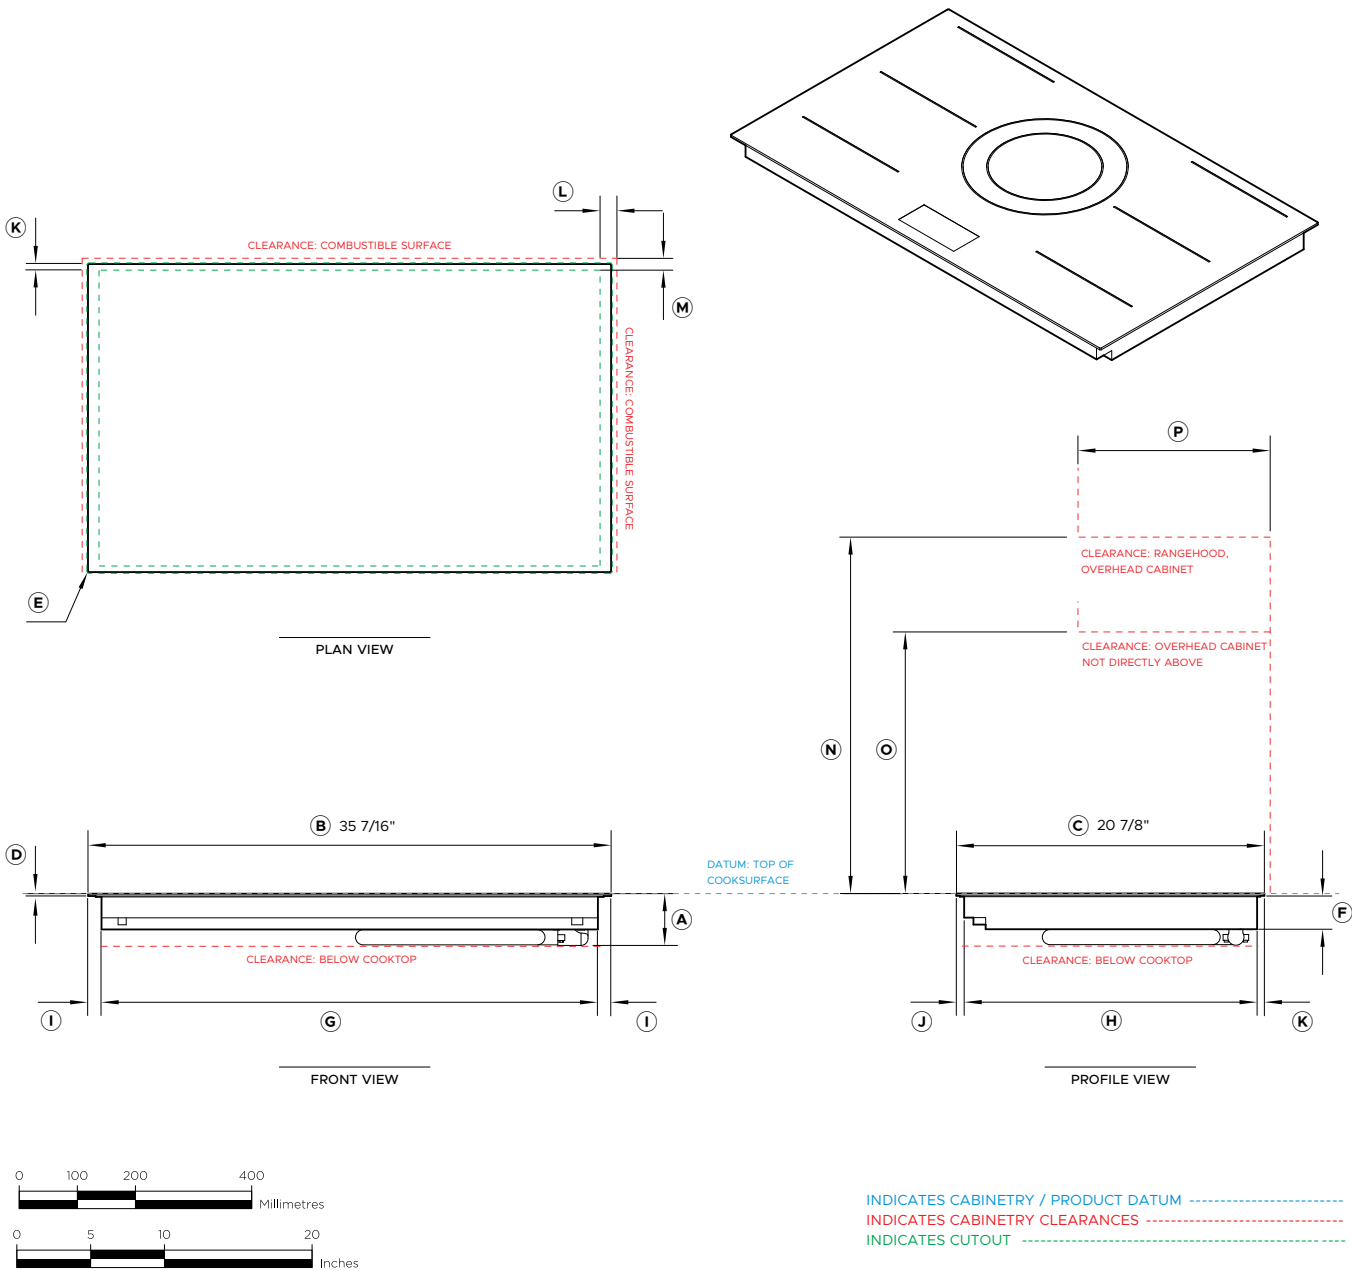

Model no:
Primary Modular Induction Cooktop, 36", 5 Zones with SmartZone, Black - CI365DTTB1

Product Dimensions	in	mm
A Overall height of cooktop	3 1/2	89
B Overall width of cooktop	35 7/16	900
C Overall depth of cooktop	20 7/8	530
D Height of cooktop glass (includes flange and tape)	1/4	6
E Corner radius of glass	1/16	2
F Height of chassis	2 3/16	56
G Width of chassis	33 5/8	854
H Depth of chassis	19 13/16	504
I Width from side edges of cooktop to chassis	1	23
J Depth from front edge of cooktop to chassis	17/32	14
K Depth from back edge of cooktop to chassis	1/2	13


Product Clearances	in	mm
L Minimum clearance from side edges of cutout to nearest combustible surface	1 3/16	29
M Minimum clearance from rear edge of cutout to nearest combustible surface	7/8	21
N Minimum clearance from glass cook surface to: Overhead cabinet centered above the cooktop (unprotected) Overhead cabinet centered above the cooktop (protected) Range hood	24	610
O Minimum clearance from glass cook surface to overhead cabinet not directly above cooktop	17 3/4	450
Minimum ventilation gap between bottom of countertop and top of cabinetry fronts (not shown)	5/32	4
Minimum clearance from glass cook surface to top of any appliances, companion product or obstruction below cooktop	3 5/8	91

NOTE: The oven installed below the cooktop MUST have a cooling fan. It is important that the induction cooktop receives adequate air supply. For ventilation requirements please refer to the installation manual.

Cutout Dimensions*	proud in	proud mm	flush in	flush mm
Overall width of cutout	33 15/16	862	33 15/16	862
Overall depth of cutout	19 31/32	507	20 1/32	509
Overall width of recess	-	-	35 19/32	904
Overall depth of recess	-	-	21 1/32	534
Overall height of recess	-	-	1/4	6.5
Recess corner radius	-	-	5/32	4

*Note cutout position is centered to the cooktop.

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

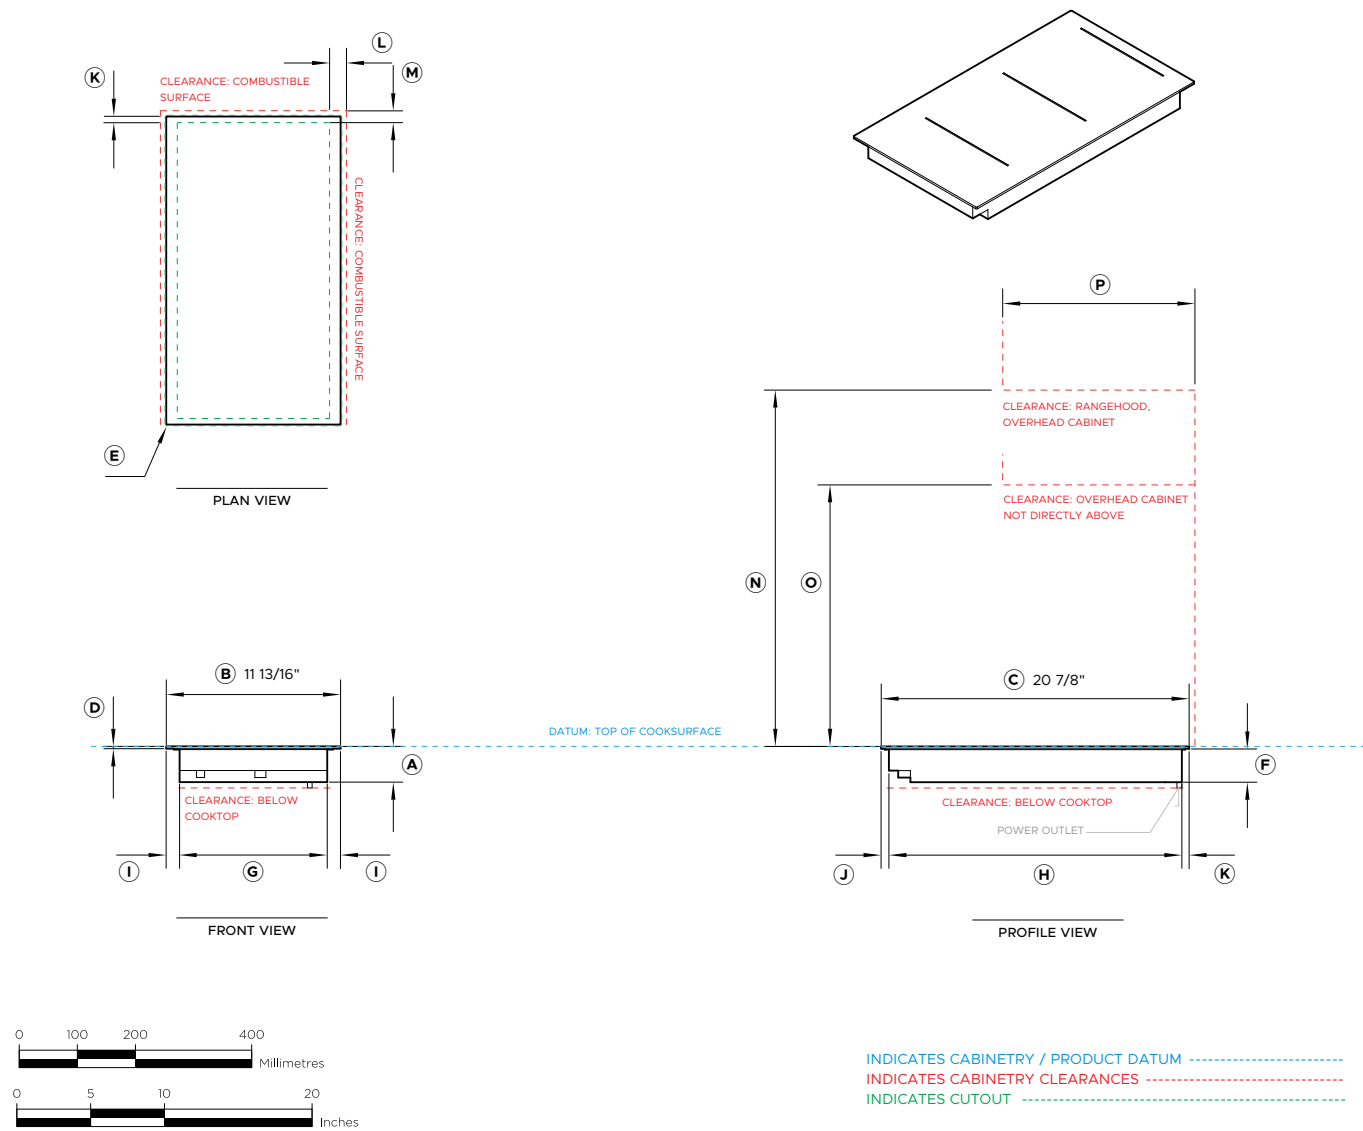

Model no:

Auxiliary Modular Induction Cooktop, 12", 2 Zones with SmartZone, Black - C1122DB1


Product Dimensions		in	mm
A	Overall height of cooktop	2 7/16	62
B	Overall width of cooktop	11 13/16	300
C	Overall depth of cooktop	20 7/8	530
D	Height of cooktop glass (includes flange and tape)	1/4	6
E	Corner radius of glass	1/16	2
F	Height of chassis	2 3/16	56
G	Width of chassis	10	254
H	Depth of chassis	19 13/16	504
I	Width from side edges of cooktop to chassis	1	26
J	Depth from front edge of cooktop to chassis	17/32	13.5
K	Depth from back edge of cooktop to chassis	1/2	12.5
Product Clearances		in	mm
L	Minimum clearance from side edges of cutout to nearest combustible surface	1 3/16	29
M	Minimum clearance from rear edge of cutout to nearest combustible surface	7/8	21
N	Minimum clearance from glass cook surface to: Overhead cabinet centered above the cooktop (unprotected) Overhead cabinet centered above the cooktop (protected) Range hood	24	610
O	Minimum clearance from glass cook surface to overhead cabinet not directly above cooktop	17 3/4	450
Minimum ventilation gap between bottom of countertop and top of cabinetry fronts (not shown)		5/32	4
Minimum clearance from glass cook surface to top of any appliances, companion product or obstruction below cooktop		2 7/8	72

NOTE: The oven installed below the cooktop MUST have a cooling fan. It is important that the induction cooktop receives adequate air supply. For ventilation requirements please refer to the installation manual.

Cutout Dimensions*	proud in	proud mm	flush in	flush mm
Overall width of cutout	10 5/16	262	10 5/16	262
Overall depth of cutout	19 31/32	507	20 1/32	509
Overall width of recess	-	-	15 5/16	389
Overall depth of recess	-	-	21 1/32	534
Overall height of recess	-	-	1/4	6.5
Recess corner radius	-	-	5/32	4

*Note cutout position is centered to the cooktop.

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

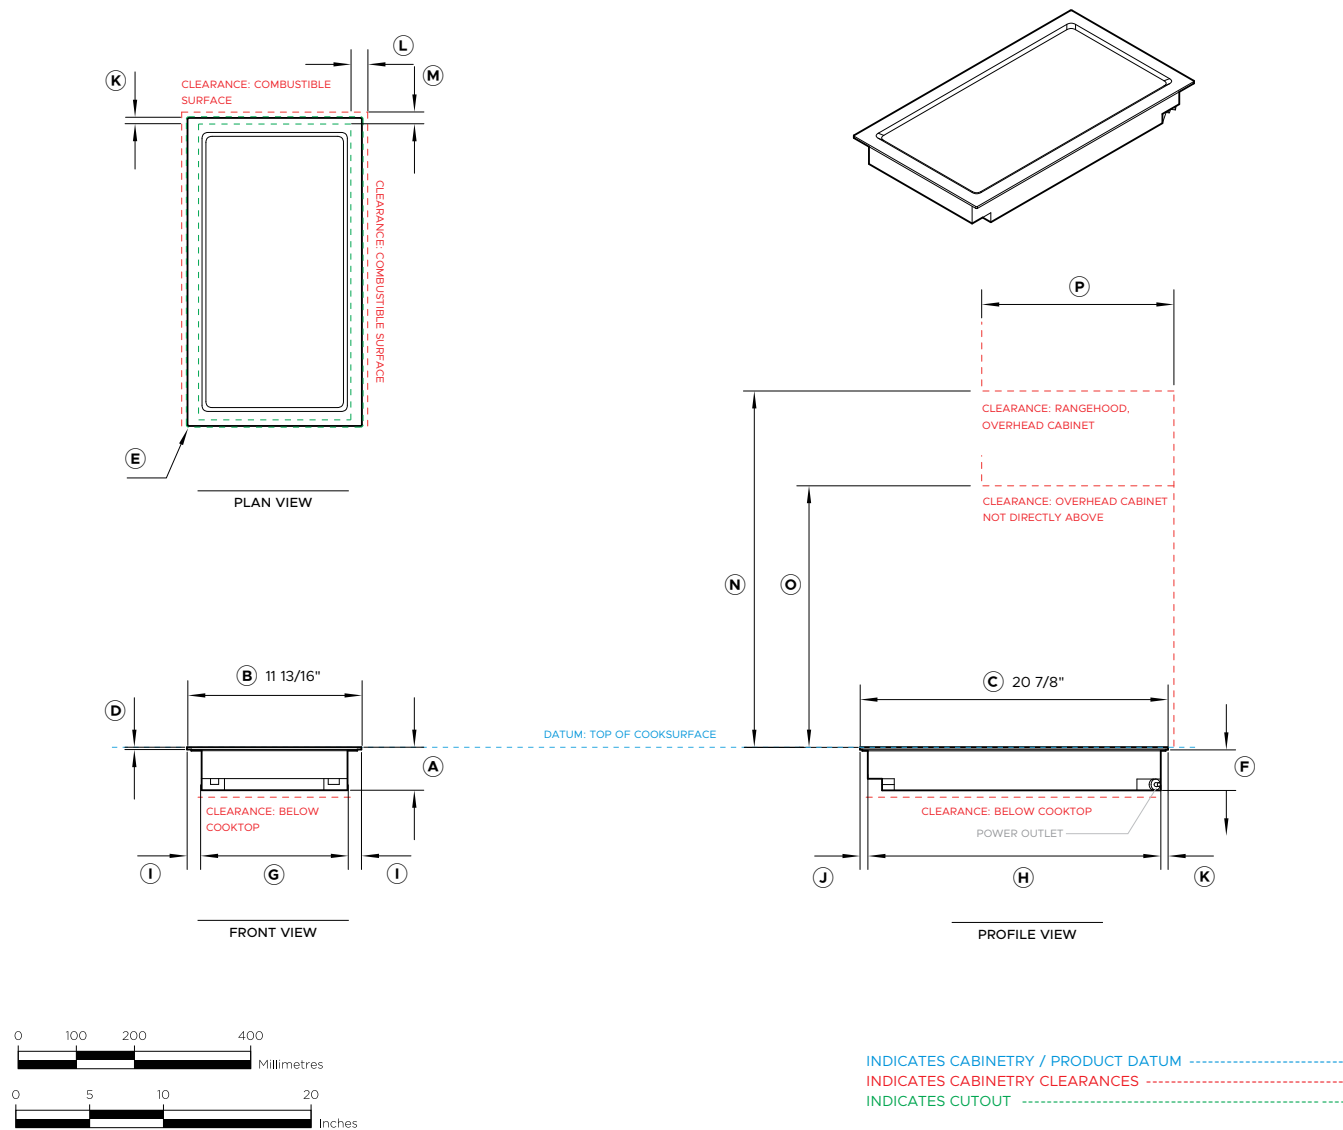

Model no:
Auxiliary Modular Teppanyaki Cooktop 12", 2 Zones - CIT122DX1

Product Dimensions	in	mm
A Overall height of cooktop	2 15/16	74
B Overall width of cooktop	11 13/16	300
C Overall depth of cooktop	20 7/8	530
D Height of stainless steel cook plate (includes flange and tape)	1/4	6
E Corner radius of stainless steel cook plate	1/16	2
F Height of chassis	2 11/16	68
G Width of chassis	9 7/8	251
H Depth of chassis	19 13/16	504
I Width from side edges of cooktop to chassis	1	24.5
J Depth from front edge of cooktop to chassis	17/32	13.5
K Depth from back edge of cooktop to chassis	1/2	12.5



Product Clearances	in	mm
L Minimum clearance from side edges of cutout to nearest combustible surface	1 3/16	29
M Minimum clearance from rear edge of cutout to nearest combustible surface	7/8	21
N Minimum clearance from stainless steel cook surface to: Overhead cabinet centered above the cooktop (unprotected) Overhead cabinet centered above the cooktop (protected) Range hood	24	610
O Minimum clearance from cook surface to overhead cabinet not directly above cooktop	17 3/4	450
Minimum ventilation gap between bottom of countertop and top of cabinetry fronts (not shown)	5/32	4
Minimum clearance from cook surface to top of any appliances, companion product or obstruction below cooktop	3 3/8	86

NOTE: The oven installed below the cooktop MUST have a cooling fan. It is important that the induction cooktop receives adequate air supply. For ventilation requirements please refer to the installation manual.

Cutout Dimensions*	proud in	proud mm	flush in	flush mm
Overall width of cutout	10 5/16	262	10 5/16	262
Overall depth of cutout	19 31/32	507	20 1/32	509
Overall width of recess	-	-	15 5/16	389
Overall depth of recess	-	-	21 1/32	534
Overall height of recess	-	-	1/4	6.5
Recess corner radius	-	-	5/32	4

*Note cutout position is centered to the cooktop.

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

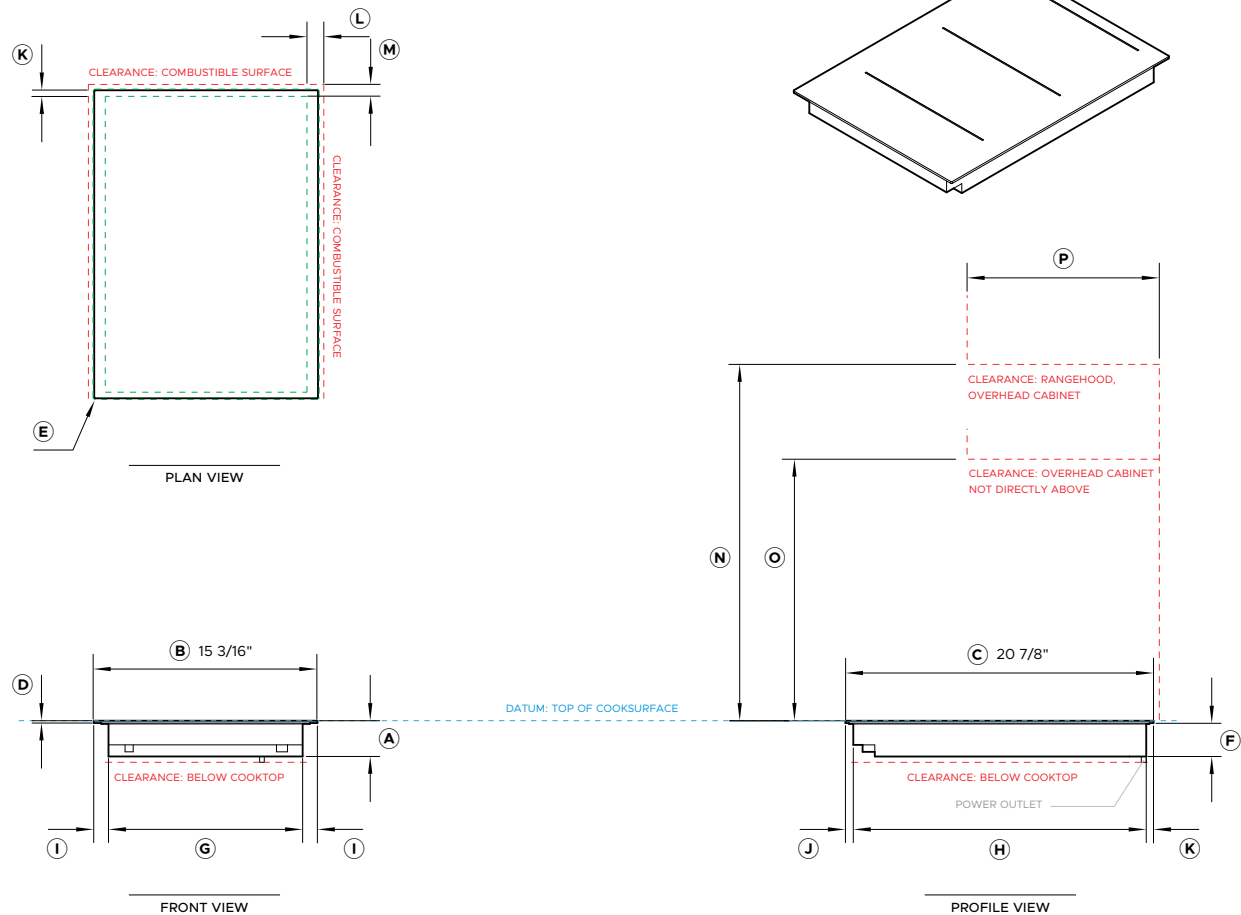

INDICATES CABINETRY / PRODUCT DATUM
INDICATES CABINETRY CLEARANCES
INDICATES CUTOUT

Model no:
Auxiliary Modular Induction Cooktop, 15", 2 Zones with SmartZone, Black - C1152DB1

Product Dimensions	in	mm
A Overall height of cooktop	2 7/16	62
B Overall width of cooktop	15 5/32	385
C Overall depth of cooktop	20 7/8	530
D Height of cooktop glass (includes flange and tape)	1/4	6
E Corner radius of stainless steel	1/16	2
F Height of chassis	2 3/16	56
G Width of chassis	13 1/8	334
H Depth of chassis	19 13/16	504
I Width from side edges of cooktop to chassis	1	26
J Depth from front edge of cooktop to chassis	17/32	13.5
K Depth from back edge of cooktop to chassis	1/2	12.5


Product Clearances	in	mm
L Minimum clearance from side edges of cutout to nearest combustible surface	1 3/16	29
M Minimum clearance from rear edge of cutout to nearest combustible surface	7/8	21
N Minimum clearance from glass cook surface to: Overhead cabinet centered above the cooktop (unprotected) Overhead cabinet centered above the cooktop (protected) Range hood	24	610
O Minimum clearance from glass cook surface to overhead cabinet not directly above cooktop	17 3/4	450
Minimum ventilation gap between bottom of countertop and top of cabinetry fronts (not shown)	5/32	4
Minimum clearance from glass cook surface to top of any appliances, companion product or obstruction below cooktop	2 7/8	72

NOTE: The oven installed below the cooktop MUST have a cooling fan. It is important that the induction cooktop receives adequate air supply. For ventilation requirements please refer to the installation manual.

Cutout Dimensions*	proud in	proud mm	flush in	flush mm
Overall width of cutout	13 11/16	347	13 11/16	347
Overall depth of cutout	19 31/32	507	20 1/32	509
Overall width of recess	-	-	15 5/16	389
Overall depth of recess	-	-	21 1/32	534
Overall height of recess	-	-	1/4	6.5
Recess corner radius	-	-	5/32	4

*Note cutout position is centered to the cooktop.

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

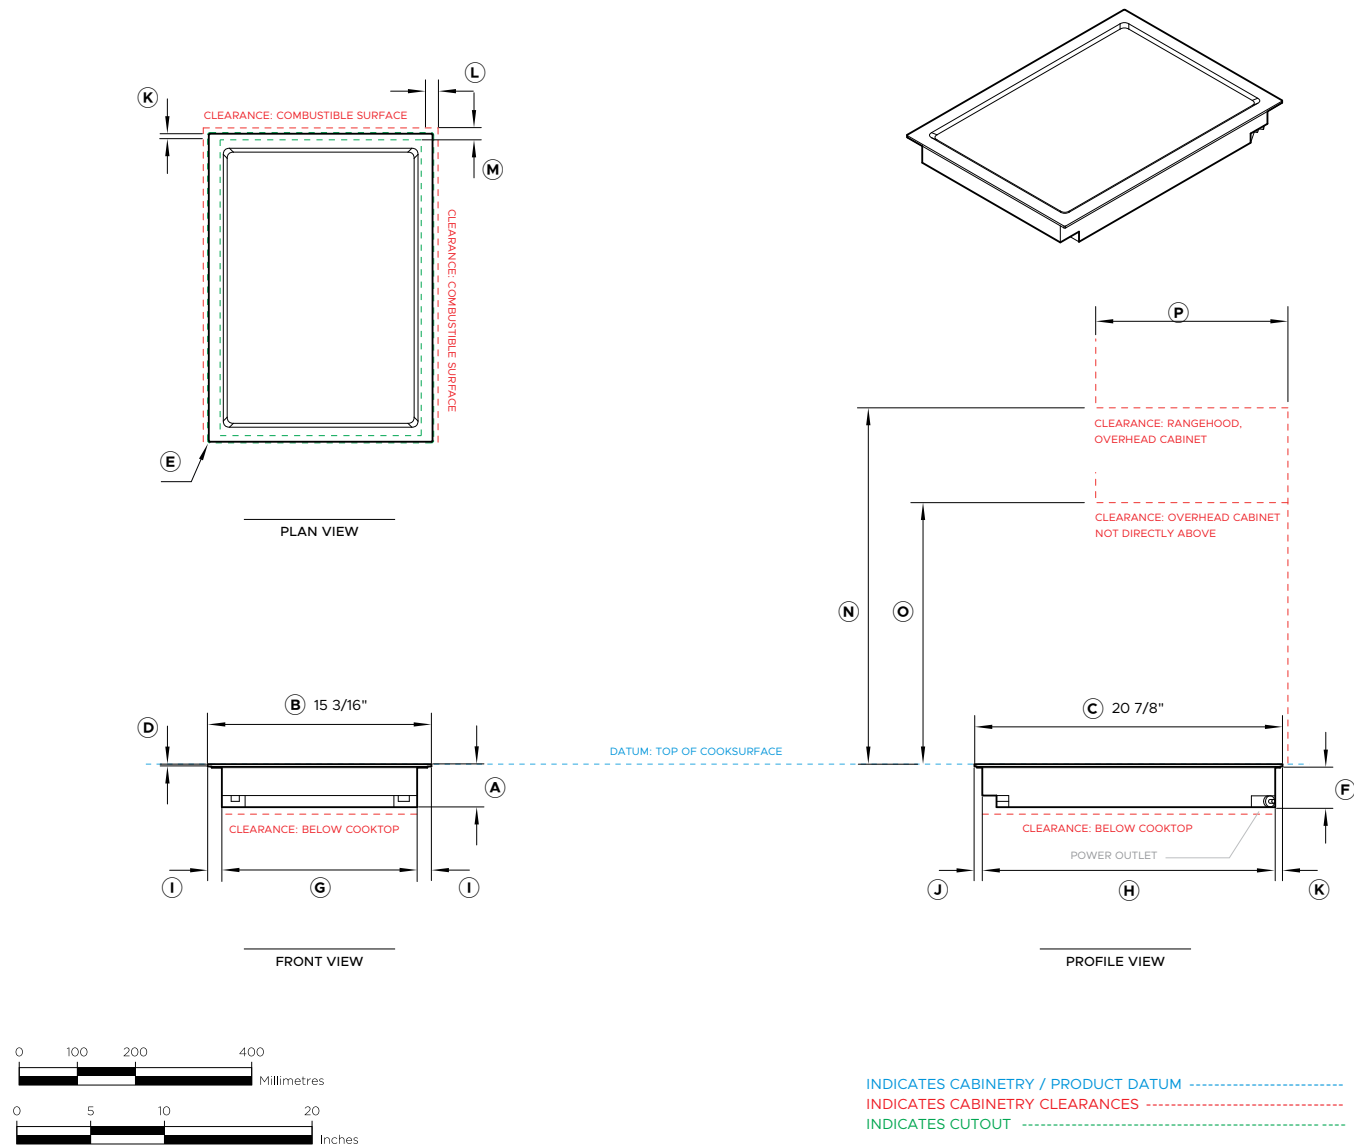

Model no:

Auxiliary Modular Teppanyaki Cooktop 15", 2 Zones - CIT152DX1

Product Dimensions		in	mm
A	Overall height of cooktop	2 15/16	74
B	Overall width of cooktop	15 5/32	385
C	Overall depth of cooktop	20 7/8	530
D	Height of stainless steel cook plate (includes flange and tape)	1/4	6
E	Corner radius of stainless steel cook plate	1/16	2
F	Height of chassis	2 11/16	68
G	Width of chassis	13 1/8	336
H	Depth of chassis	19 7/8	504
I	Width from side edges of cooktop to chassis	1	26
J	Depth from front edge of cooktop to chassis	17/32	13.5
K	Depth from back edge of cooktop to chassis	1/2	12.5


Product Clearances		in	mm
L	Minimum clearance from side edges of cutout to nearest combustible surface	1 3/16	29
M	Minimum clearance from rear edge of cutout to nearest combustible surface	7/8	21
N	Minimum clearance from stainless steel cook surface to: Overhead cabinet centered above the cooktop (unprotected) Overhead cabinet centered above the cooktop (protected) Range hood	24	610
O	Minimum clearance from cook surface to overhead cabinet not directly above cooktop	17 3/4	450
Minimum ventilation gap between bottom of countertop and top of cabinetry fronts (not shown)		5/32	4
Minimum clearance from cook surface to top of any appliances, companion product or obstruction below cooktop		3 3/8	86

NOTE: The oven installed below the cooktop MUST have a cooling fan. It is important that the induction cooktop receives adequate air supply. For ventilation requirements please refer to the installation manual.


Cutout Dimensions*	proud in	proud mm	flush in	flush mm
Overall width of cutout	13 11/16	347	13 11/16	347
Overall depth of cutout	19 31/32	507	20 1/32	509
Overall width of recess	-	-	15 5/16	389
Overall depth of recess	-	-	21 1/32	534
Overall height of recess	-	-	1/4	6.5
Recess corner radius	-	-	5/32	4

*Note cutout position is centered to the cooktop.

IMPORTANT NOTE: Throughout this guide, dimensions may vary by $\pm 2\text{mm}$ (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

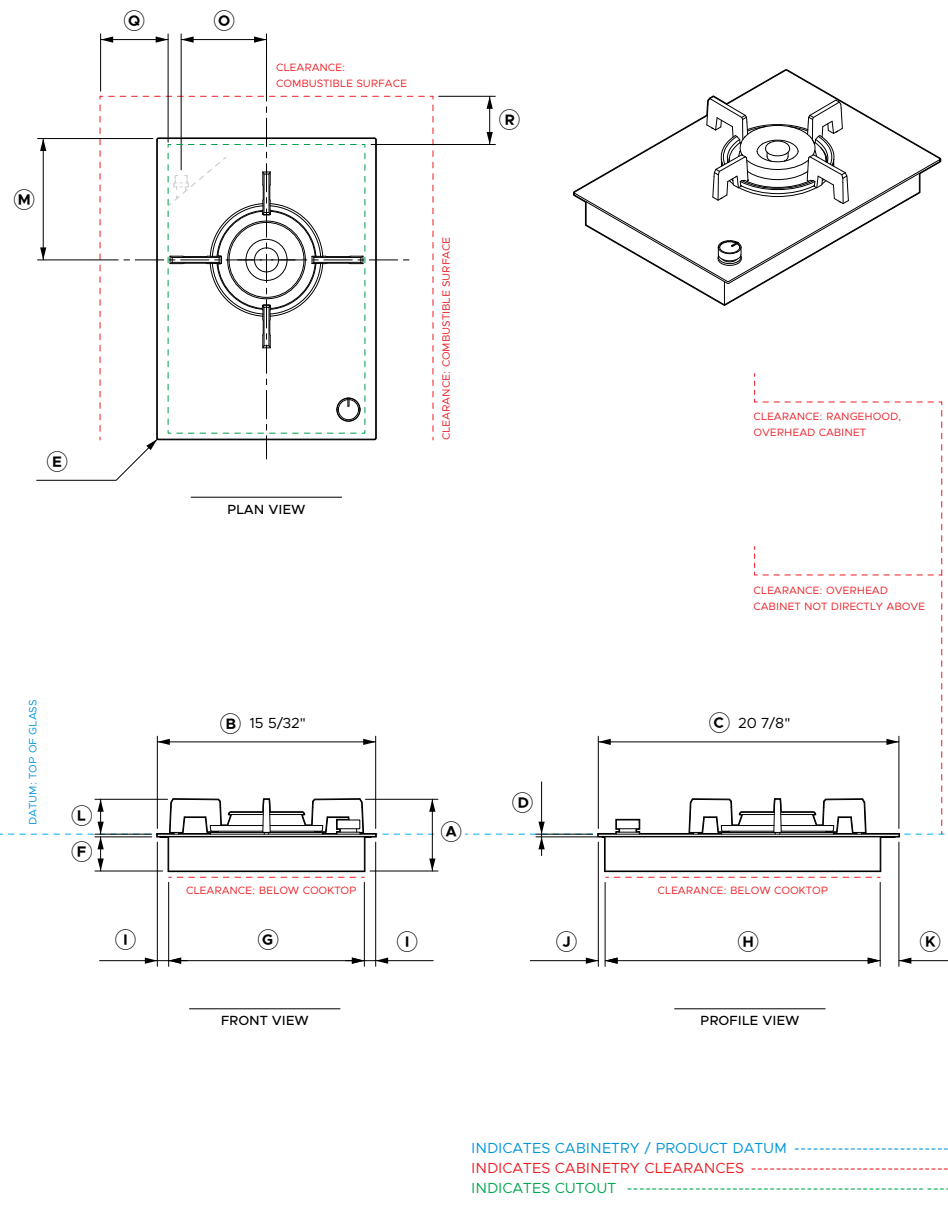


Model no:				
Gas on Glass Modular Cooktop, 15", LPG - CG151DLPGGB5,				
Gas on Glass Modular Cooktop, 15", Natural Gas - CG151DNGB5				
Product Dimensions			in	mm
A Overall height of cooktop (including trivet)			5	127
B Overall width of cooktop			15 5/32	385
C Overall depth of cooktop			20 7/8	530
D Height of cooktop glass (includes flange and tape)			1/4	6
E Corner radius of glass			1/16	2
F Height of chassis			2 7/16	61
G Width of chassis			13 9/16	345
H Depth of chassis			19 1/8	485
I Width from side edges of cooktop to chassis			13/16	20
J Depth from front edge of cooktop to chassis			1/2	12
K Depth from back edge of cooktop to chassis			1 5/16	33
L Height of trivet			2 7/16	62
M Distance from centre of burner to rear of cooktop			8 7/16	214
N Height from centre of gas inlet to top of glass			1 1/4	32
O Width from centre of cooktop to gas inlet			5 15/16	150
P Distance from rear of cooktop to gas inlet			2 9/16	65
Product Clearances			in	mm
Q Minimum clearance from side edges of cutout to nearest combustible surface			4 3/4	120
R Minimum clearance from rear edge of cutout to nearest combustible surface			3 3/8	85
Minimum clearance from counter top to surface, cabinet or rangehood directly centered above the cooktop			30	724
Minimum clearance from top of glass surface to overhead cabinet not directly above cooktop			18	457
Maximum depth of overhead cabinets not directly above cooktop			13	330
Minimum clearance from top of glass surface to top of any appliance, companion product or obstruction below cooktop			3	76
Cutout Dimensions*			proud in	proud mm
Overall width of cutout			13 11/16	347
Overall depth of cutout			19 31/32	507
Overall width of recess			-	-
Overall depth of recess			-	-
Overall height of recess			-	-
Recess corner radius			-	-
*Note cutout position is centered to the cooktop.				
IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com				

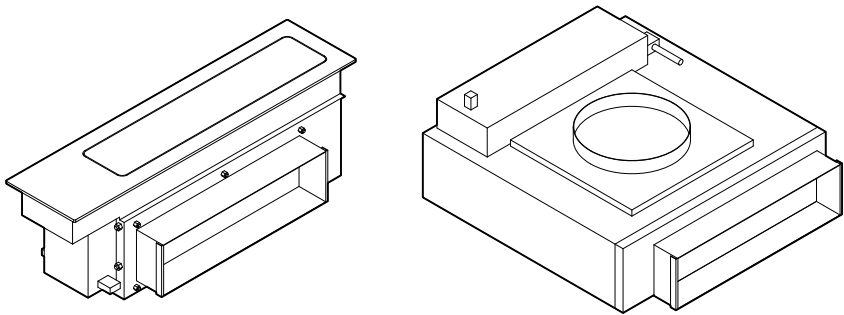


MAINBOX


BLOWERBOX



MAINBOX OUTLET ADAPTER



BLOWERBOX OUTLET ADAPTER

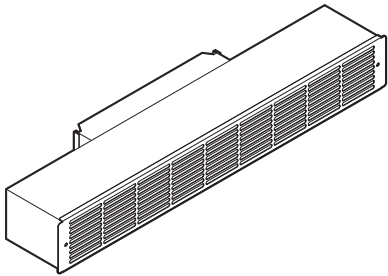





RECIRCULATION KIT

Model no:
Auxiliary Modular Ventilation, 5", Black - DD5DB1

Component Description	Supplied	Optional Accessory
Mainbox	x1	
Blowerbox	x1	
Mainbox Outlet Adapter, 2.25" x 12"		OAD225X12
Blower Outlet Adapter, 2.25" x 12"		OAB225X12
Recirculation Kit		KRECIRCDDFT

INDICATES CABINETRY / PRODUCT DATUM -----
INDICATES CABINETRY CLEARANCES -----
INDICATES CUTOUT -----

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

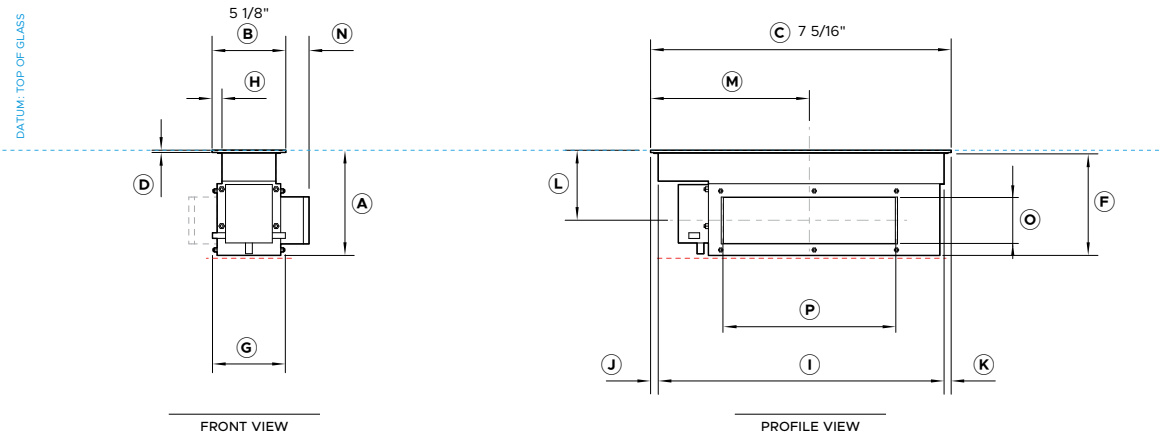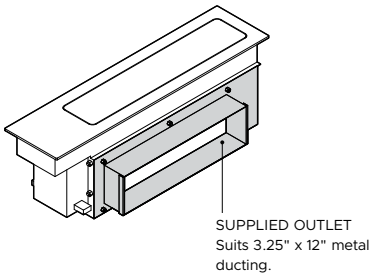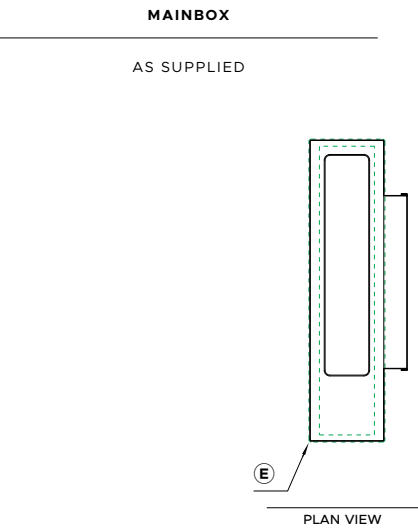

Model no:
Auxiliary Modular Ventilation, 5", Black - CD5DB1

Product Dimensions	in	mm
A Overall height of mainbox	7 3/8	186
B Overall width of mainbox	5 1/8	130
C Overall depth of mainbox	20 7/8	530
D Height of glass (includes flange and tape)	1/4	6
E Corner radius of glass	1/16	2
F Height of chassis	7 2/16	180
G Width of lower chassis (includes communication ports)	5	126
H Width from sides of glass to neck of chassis	11/16	18
I Depth of chassis	19 7/8	504
J Depth from front edge of glass to chassis	17/32	13.5
K Depth from back edge of glass to chassis	1/2	12.5
L Height from top of glass to center of outlet	4 7/8	124
M Depth from front edge of glass to center of outlet	11	280
N Width from edge of glass to outside of outlet	1 5/8	41
O Height of outlet	3 1/4	83
P Width of outlet	12	305

Product Clearances	in	mm
Minimum clearance from top surface to top of any appliances, companion product or obstruction below mainbox	7 7/8	200

Cutout Dimensions*	proud in	proud mm	flush in	flush mm
Overall width of cutout	3 7/8	98	3 7/8	98
Overall depth of cutout	19 31/32	507	20 1/32	509
Overall width of recess	-	-	5 9/32	134
Overall depth of recess	-	-	21 1/32	534
Overall height of recess	-	-	1/4	6.5
Recess corner radius	-	-	5/32	4

*Note cutout position is centered to the cooktop.

INDICATES CABINETRY / PRODUCT DATUM -----


INDICATES CABINETRY CLEARANCES -----

INDICATES CUTOUT -----

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

MAINBOX

WITH MAINBOX OUTLET ADAPTER

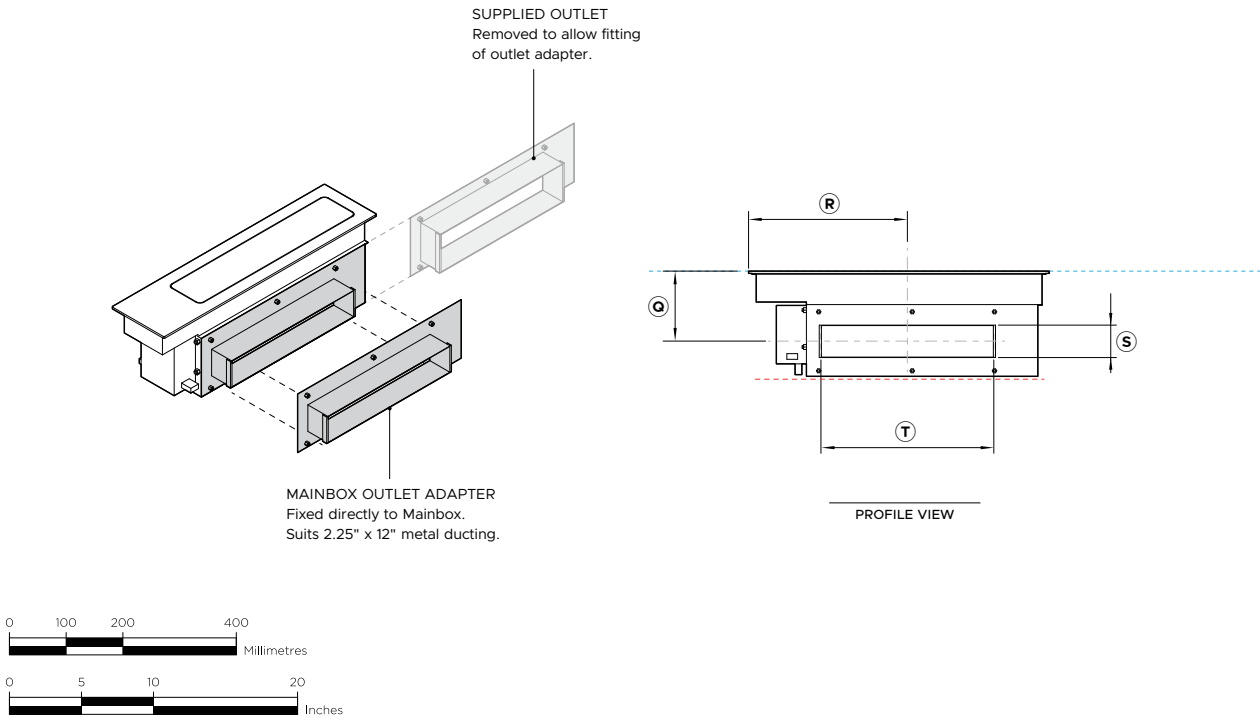

Model no:
Mainbox Outlet Adapter, 2.25" x 12" - OAD225X12

Product Dimensions	in	mm
Q Height from top of glass to center of outlet	4 7/8	124
R Depth from front edge of mainbox glass to center of outlet	11	280
S External height of outlet	2 1/4	57
T External width of outlet	12	305

INDICATES CABINETRY / PRODUCT DATUM -----


INDICATES CABINETRY CLEARANCES -----

INDICATES CUTOUT -----

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

BLOWERBOX

AS SUPPLIED

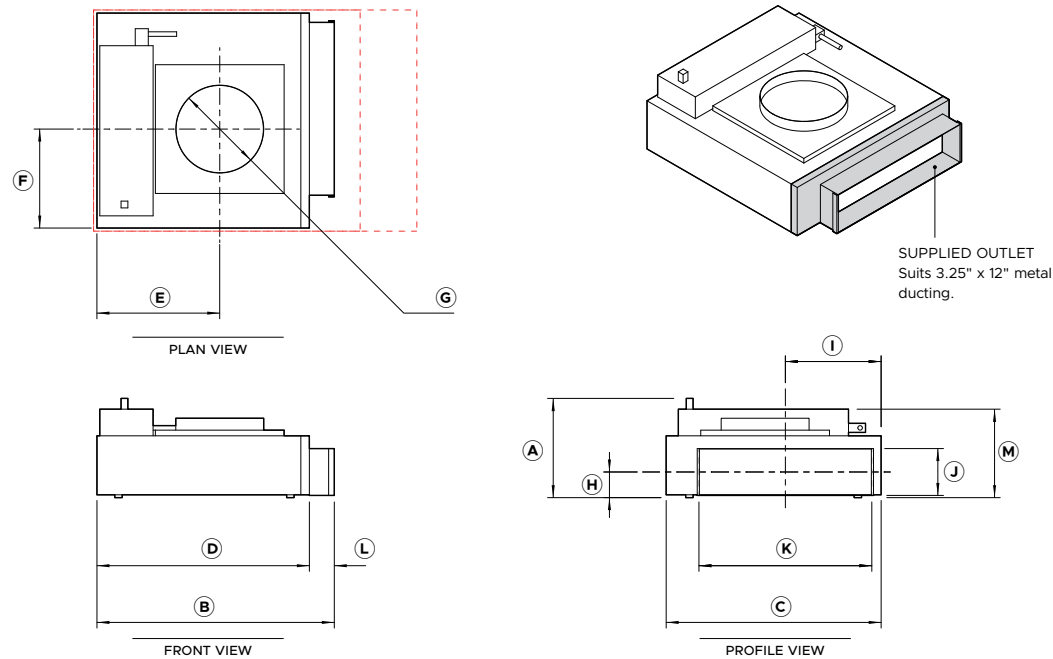

Model no:
Auxiliary Modular Ventilation, 5", Black - CD5DB1


Product Dimensions	in	mm
A Overall height of blowerbox	6 15/16	175
B Overall width of blowerbox (including outlet)	16 1/2	419
C Overall depth of blowerbox	14 15/16	379
D Width of blowerbox chassis	14 13/16	375
E Width from corner to center of inlet	8 9/16	217
F Depth from corner to center of inlet	6 7/8	175
G Internal diameter of inlet	6 1/16	154
H Height from base of mainbox to center of outlet	1 5/16	33
I Width from outside of chassis to center of outlet	6 11/16	169
J Height of outlet	3 1/4	83
K Width of outlet	12	305
L Depth of outlet	1 3/4	44
M Height of blowerbox (excluding communications connector)	6 3/16	156

Cutout Dimensions*	in	mm
Recommended width of cutout **	22 7/16	570
Minimum width of cutout ***	18 1/2	470
Depth of cutout	15 3/8	390

*Blowerbox can be rotated to achieve desired outlet direction, cutout dimensions must be similarly rotated.
** Recommended width allows greater access to outlet for connecting ducting during installation.
*** Clearance only for blowerbox, does not provide allowances for connecting to ducting within kickstrip

BLOWERBOX

WITH BLOWER OUTLET ADAPTER

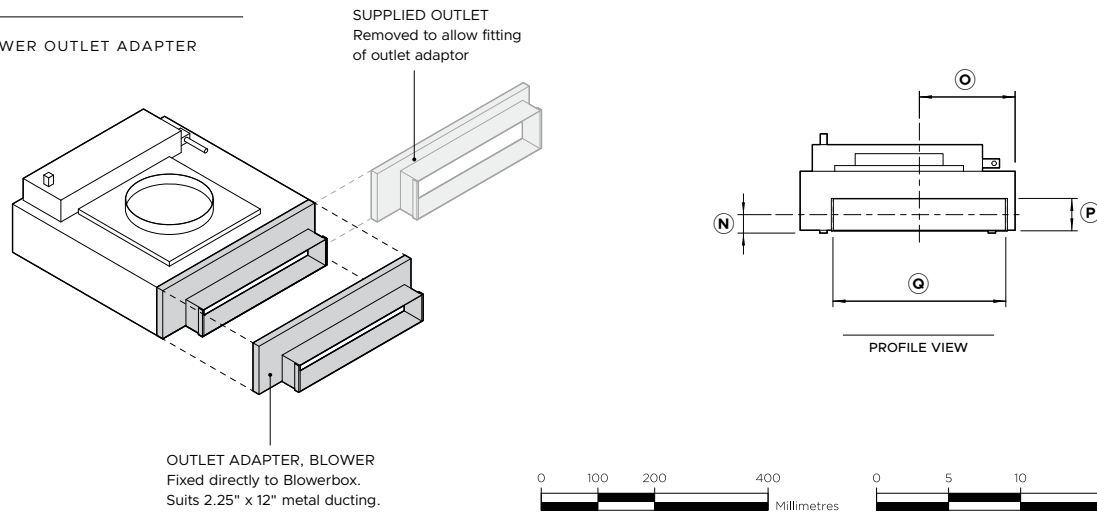

Model no:
Blower Outlet Adapter, 2.25" x 12" - OAB225X12


Product Dimensions	in	mm
N Height from base of blowerbox to center of outlet	1 13/16	45
O Width from side of blowerbox chassis to center of outlet	6 11/16	169
P External height of outlet	2 1/4	57
Q External width of outlet	12	305

INDICATES CABINETRY / PRODUCT DATUM
INDICATES CABINETRY CLEARANCES
INDICATES CUTOUT

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com


RECIRCULATION KIT

COMPONENT OVERVIEW

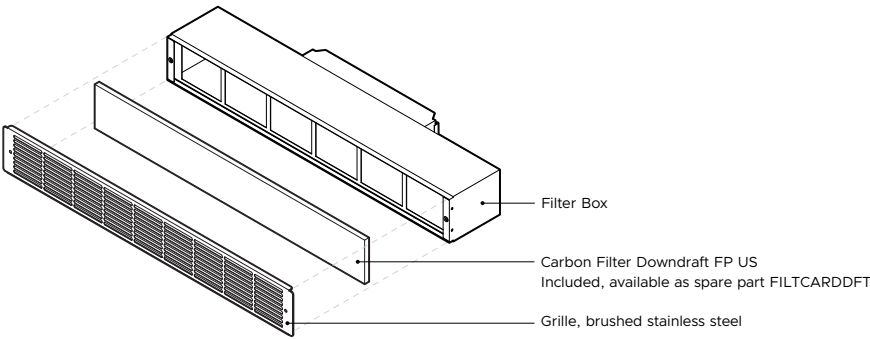

RECIRCULATION KIT

OVERALL ASSEMBLY

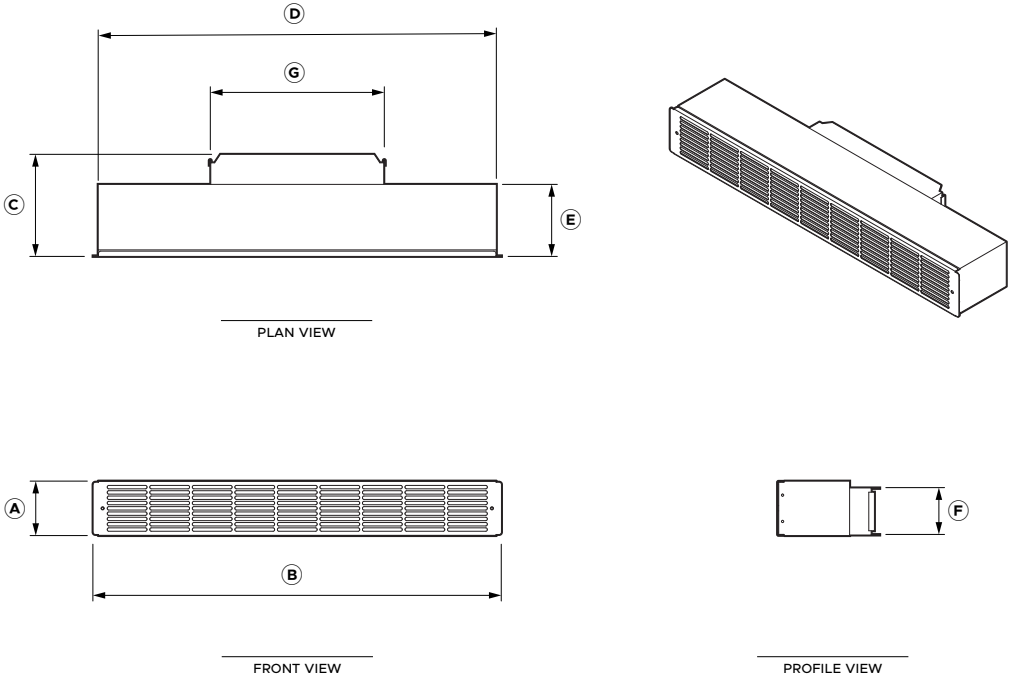

Model no:

Recirculation Kit - KRECIRCDDFT


Overall assembly

Product Dimensions	in	mm
A Overall height of recirculation kit	3 13/16	96
B Overall width of recirculation kit	28 3/8	720
C Overall depth of recirculation kit	7 1/8	180
D Width of filter box chassis	27 11/16	702
E Depth of filter box chassis and front grille	5	127
F Height of outlet	3 1/4	83
G Width of outlet	12	305


Cutout Dimensions	in	mm
Recommended width of cutout	27 3/4	705
Minimum width of cutout	3 7/8	99

INDICATES CABINETRY / PRODUCT DATUM
INDICATES CABINETRY CLEARANCES
INDICATES CUTOUT

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

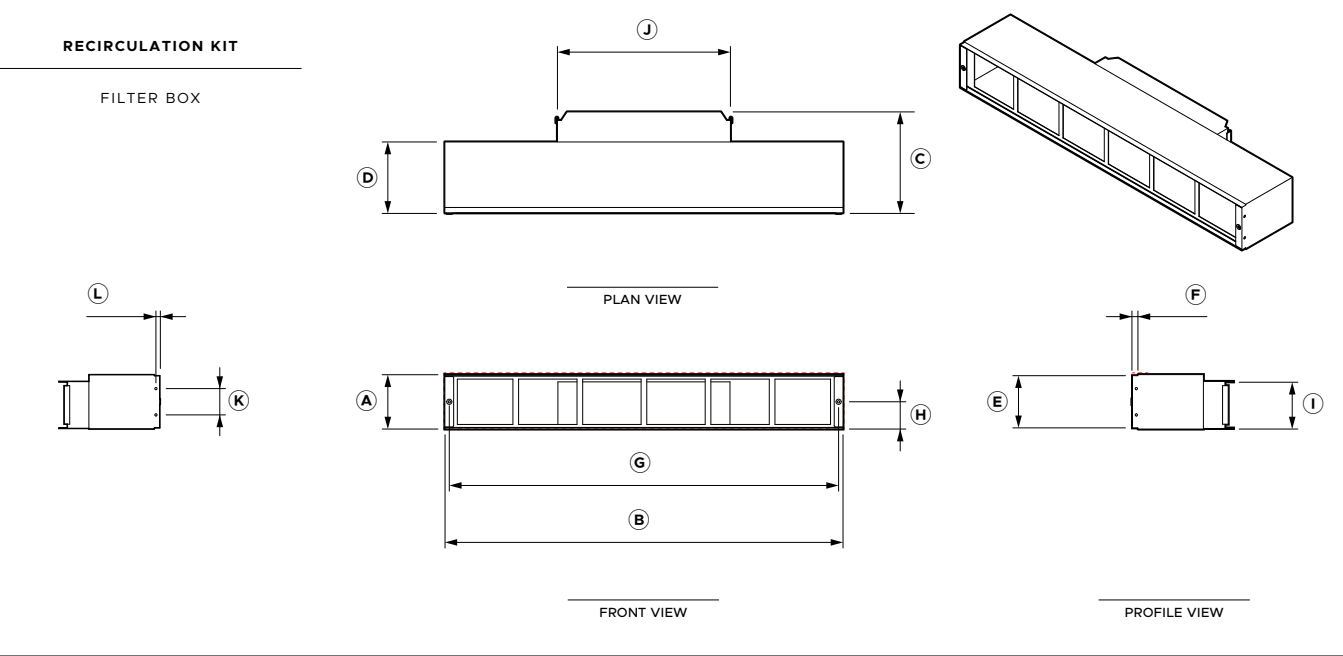

Model no: Filter Box, Recirculation Kit		
Product Dimensions	in	mm
A Overall height of filter box	3 13/16	96
B Overall width of filter box	27 5/8	702
C Overall depth of filter box	7 1/16	179
D Depth of filter box chassis (includes nutsert)	5	126
E Height of chassis step down for grille	3 5/8	92
F Depth of chassis step down for grille	7/16	11
G Width between grille fastening holes	27 1/32	686.5
H Height of grille fastening holes from base of chassis	1 7/8	48
I Height of outlet	3 1/4	83
J Width of outlet	12	305
K Height between centre of holes (central to chassis)	1 13/16	46
L Centre of holes to front of chassis (includes nutsert)	1/4	5/16
Cutout Dimensions	in	mm
Recommended width of cutout	27 3/4	705
Minimum width of cutout	3 7/8	99

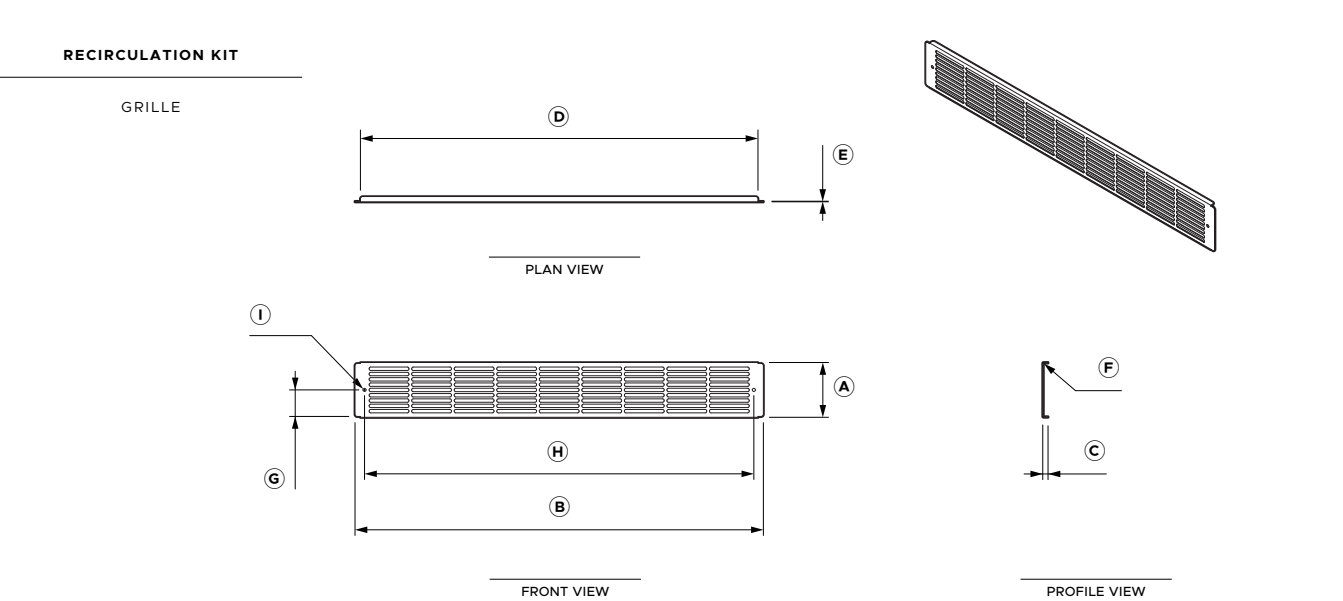


Model no: Grille, Recirculation Kit		
Product Dimensions	in	mm
A Overall height of grille	3 13/16	96
B Overall width of grille	28 3/8	720
C Overall depth of grille	3/8	10
D Width of flange	27 5/8	701
E Thickness of sheet metal	1/16	1
F Internal radius of bend	1/32	0.5
G Height from base of grille to centre of holes	1 7/8	47.5
H Width between centre of holes	27 1/32	686.5
I Diameter of holes	7/32	5.5


INDICATES CABINETRY / PRODUCT DATUM
INDICATES CABINETRY CLEARANCES
INDICATES CUTOUT

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

PRODUCT DECISIONS

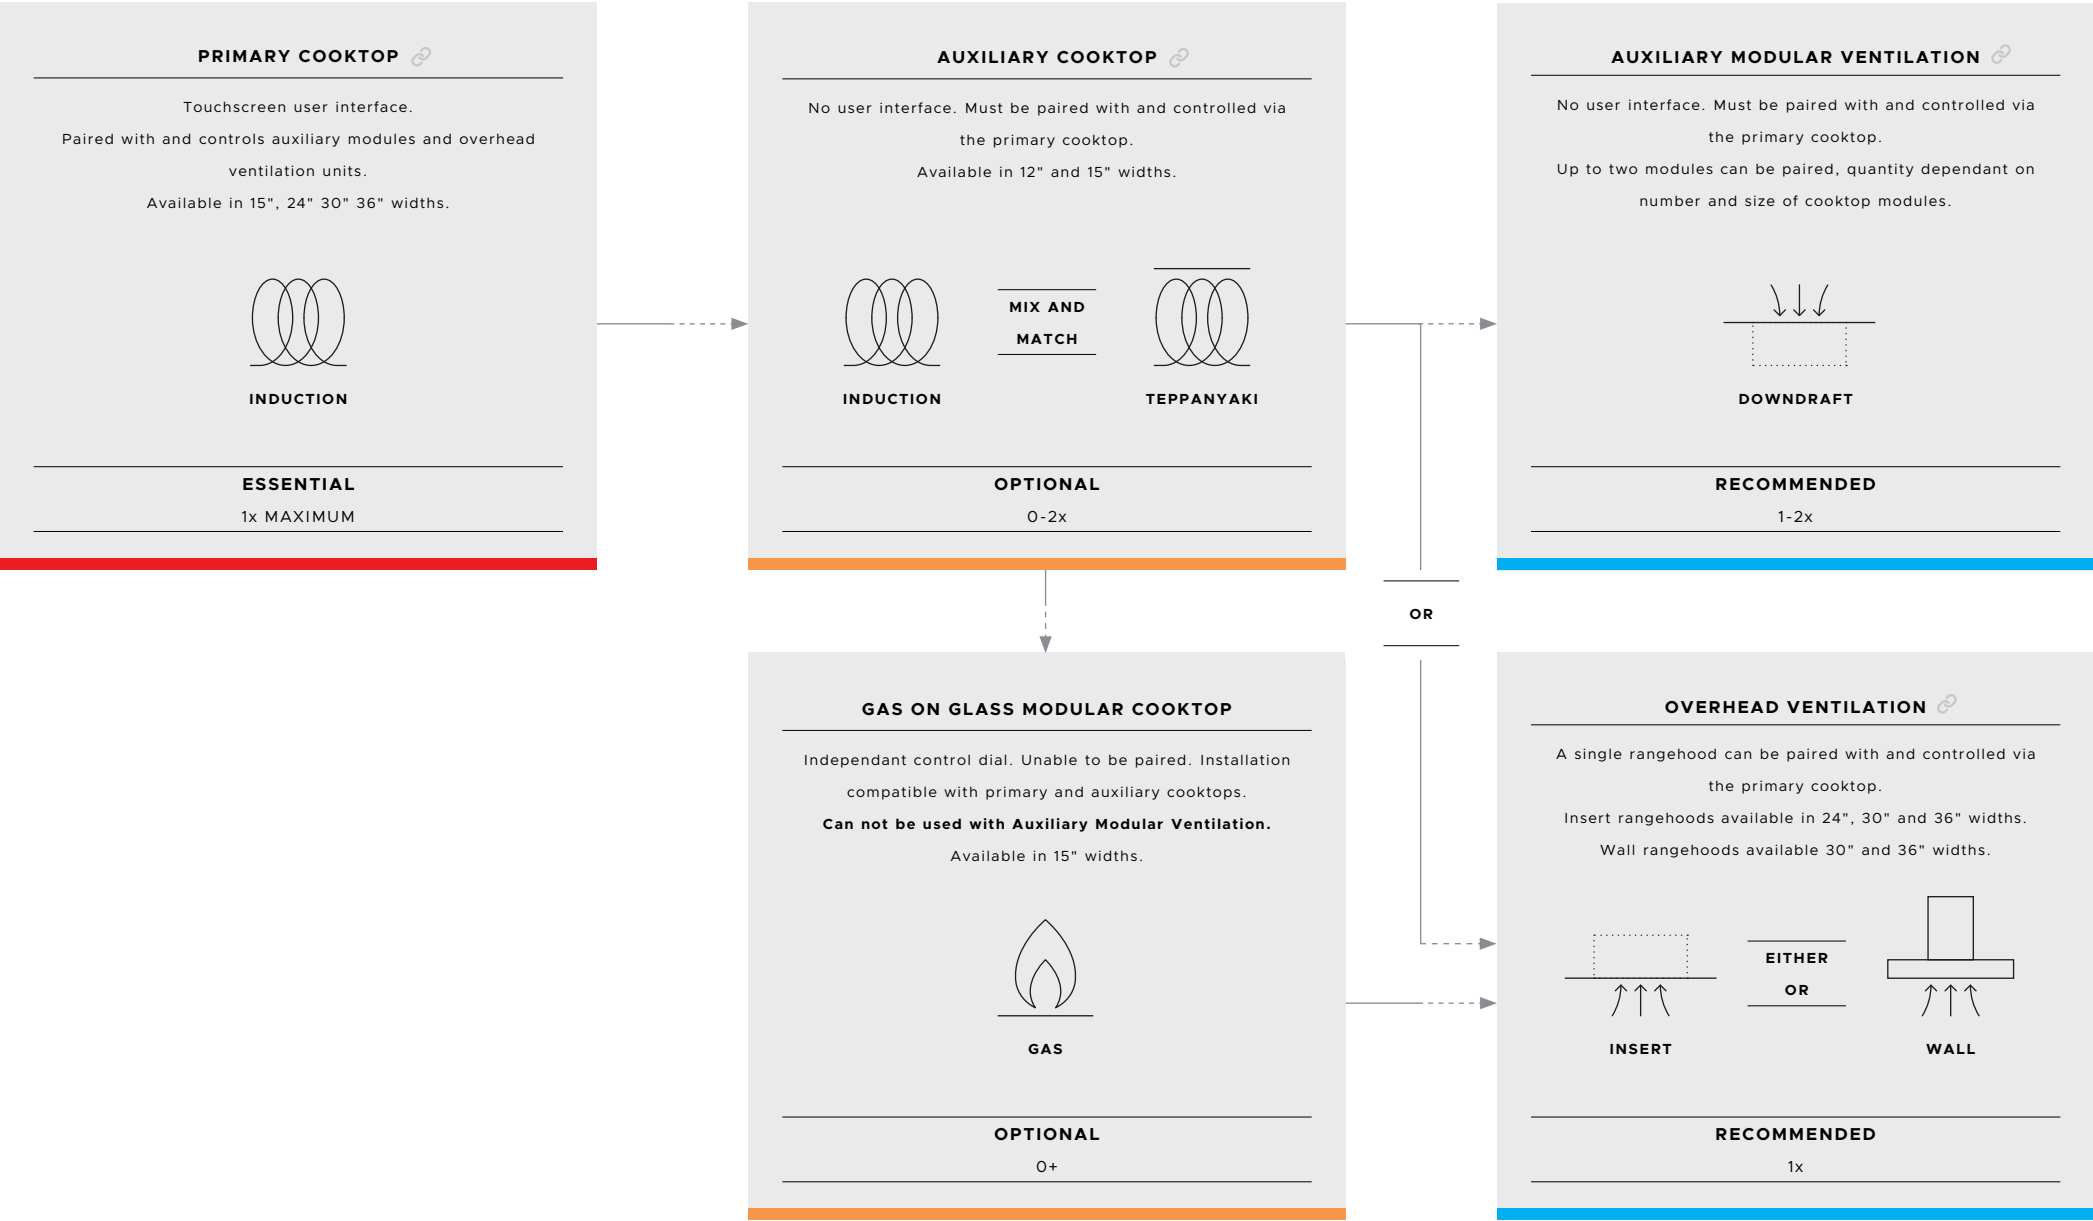

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

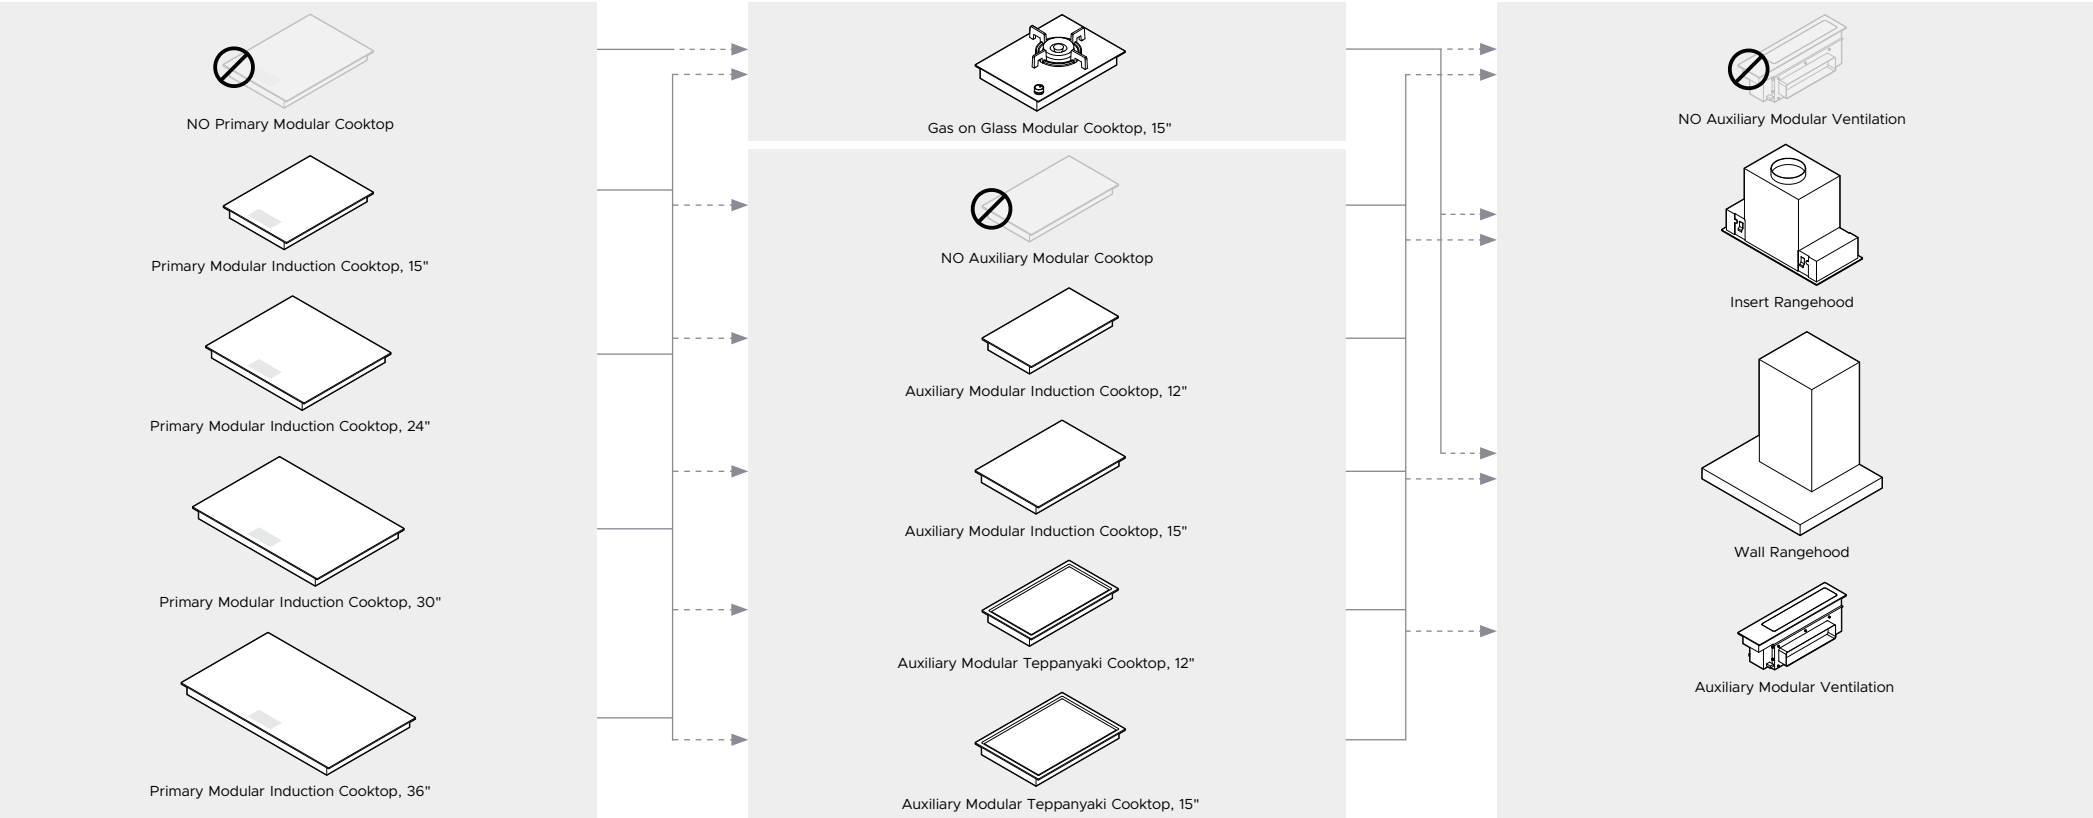

Primary cooktops have a touchscreen via which the Auxiliary Induction, Teppanyaki and Ventilation modules are controlled. Gas on Glass modules are independantly controlled and can not be paired with a Primary module.

PRIMARY MODULAR COOKTOPS - CONNECTED	
Primary Modular Induction Cooktop, 15"	C1152DTTB1
Primary Modular Induction Cooktop, 24"	C1244DTTB1
Primary Modular Induction Cooktop, 30"	C1304DTTB1
Primary Modular Induction Cooktop, 36"	C1365DTTB1











Mix and match up to 2x Auxiliary cooktops and multiple Gas on Glass modules.

GAS ON GLASS MODULAR COOKTOPS	
Gas on Glass Modular Cooktop, 15", LPG	CG151DLPGB5
Gas on Glass Modular Cooktop, 15", Natural Gas	CG151DNGGB5
AUXILIARY MODULAR COOKTOPS - CONNECTED	
Auxiliary Modular Induction Cooktop, 12"	C1122DB1
Auxiliary Modular Induction Cooktop, 15"	C1152DB1
Auxiliary Modular Teppanyaki Cooktop, 12"	C1T122DX1
Auxiliary Modular Teppanyaki Cooktop, 15"	C1T152DX1

Ventilation options are dependant on module sizes, pairings and cook type. Overhead ventilation can be used for all cook types while Modular downdraft ventilation can only be installed with with Induction and Teppanyaki modules and never with Gas on Glass.

AUXILIARY MODULAR VENTILATION - CONNECTED	
Auxiliary Modular Ventilation, 5"	CD5DB1
OVERHEAD VENTILATION - CONNECTED	
Wall Range Hood, 30", Box Chimney	HC30DCXB4
Wall Range Hood, 36" Box Chimney	HC36DCXB4
Integrated Insert Range Hood, 24"	HP24IDCHX4
Integrated Insert Range Hood, 30"	HP30IDCHX4
Integrated Insert Range hood, 36"	HP36IDCHX4


The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

PLEASE NOTE Alternative non-connected rangehood width and styles are available.			 AUXILIARY COOKTOP CONNECTED x0-2 C1122D C1122DX1 C1152D C1152DX1	 GASS ON GLASS COOKTOP NOT connected x0-2 CG151DLPGB5 CG151DNGGB5	COMBINED COOKTOP WIDTH Width of cooktop(s) must be equal to or smaller than rangehood width	 AUXILIARY MODULAR VENTILATION CONNECTED x1-2 DOWNDRAFT CD5D	 WALL RANGEHOOD CONNECTED x1 30" HC30DCXB4 36" HC36DCXB4	 INSERT RANGEHOOD CONNECTED x1 24" HP24IDCHX4 30" HP30IDCHX4 36" HP36IDCHX4	 INSERT RANGEHOOD NOT connected x1 48" HPB4819-12		
PRIMARY COOKTOP CONNECTED x1		15" CI152DTT			15"	x1	x1		x1		
			x1 12"		27"	x1	x1			x1	
			x1 15"		30"	x1	x1			x1	
				x1 15"	30"		x1			x1	
			x2 12"		39"	x2					x1
			x2 15"		45"	x2					x1
			x1 15"	x1 15"	45"						x1
		24" CI244DTT			24"	x2	x1		x1		
			x1 12"		36"	x2		x1			
			x1 15"		39"	x2					x1
				x1 15"	39"						x1
			x2 12"		48"	x2					x1
			x2 15"		54"	x2					
		30" CI304DTT			30"		x1			x1	
			x1 12"		42"						x1
			x1 15"		45"						x1
				x1 15"	45"						x1
	Wider cooktop combinations are not able to be vented by modular ventilation or a single overhead unit.										
		36" CI365DTT			36"			x1			x1
			x1 12"		48"						x1
			Wider cooktop combinations are not able to be vented by modular ventilation or a single overhead unit.								

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com


DOWNDRAFT VENTILATION

The modular ventilation unit is a downdraft ventilation system that efficiently extracts air across and downwards.



TOP VIEW

The modular ventilation unit provides efficient ventilation to adjacent cook zones. Consideration of cook zone layout and cook module size is critical for optimum pairing of ventilation type and quantity.




FRONT VIEW

Important: Where modular ventilation is unable to provide efficient venting it is recommended that overhead extraction is chosen.


WARNING:

Modular Ventilation cannot be used alongside a gas cooktop.




SUFFICIENT VENTILATION

ADJACENT COOK ZONES ARE EFFECTIVELY VENTED




12" & 15" MODULES




24" PRIMARY MODULE WITH 2X DOWNDRAFT

INSUFFICIENT VENTILATION


NON-ADJACENT COOK ZONES ARE NOT SUFFICIENTLY VENTED

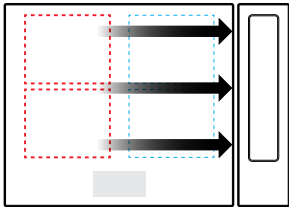

24" PRIMARY MODULE WITH 1X DOWNDRAFT

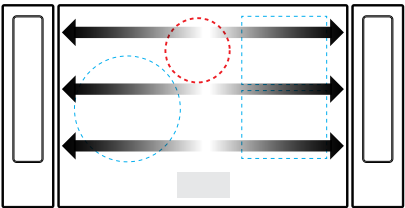


30" PRIMARY MODULE WITH 2X DOWNDRAFT

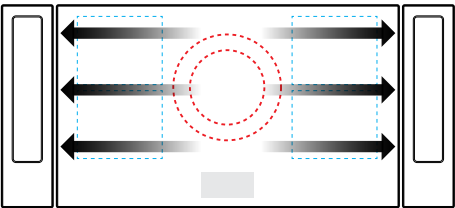

36" PRIMARY MODULE WITH 2X DOWNDRAFT

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

PLANNING CONSIDERATIONS

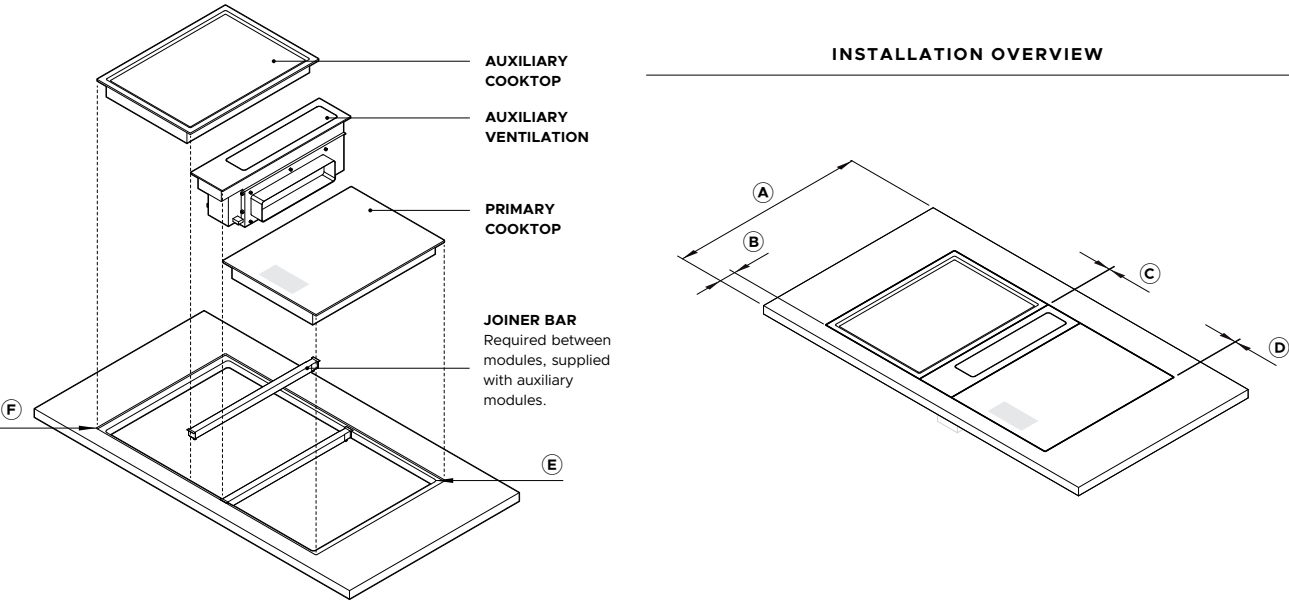


COUNTERTOP DIMENSIONS		in	mm
A	Minimum countertop depth*		
	- Induction and teppanyaki	23 5/8	600
	- with gas on glass cooktop	26 3/16	665
	- with auxiliary ventilation, ducting routed below cooktops **	23 5/8	600
	- with auxiliary ventilation, ducting routed to rear of cabinet **	27 9/16	700
B	Nominal distance from front of countertop to front of cooktop	2 3/8	60
C	Distance between modules	5/64	2
D	Distance between edge of module and edge of recess	5/64	2
E	Corner radii of cutout **	max 3/8	max 10
F	Corner radii of recess **	5/32	4

* Based on nominal distance 'B'. Does not allow for ducting. Dependant on countertop materials.
** Guideline only, based on generic metal ducting. Customer must supply ducting and calculate cabinetry and countertop dimensions specific to chosen duct type and layout.

IMPORTANT NOTE

Cutout widths and radii may not be possible in certain countertop materials.
Please refer to countertop suppliers material specifications and fabrication parameters.

CLEARANCE OVERVIEW

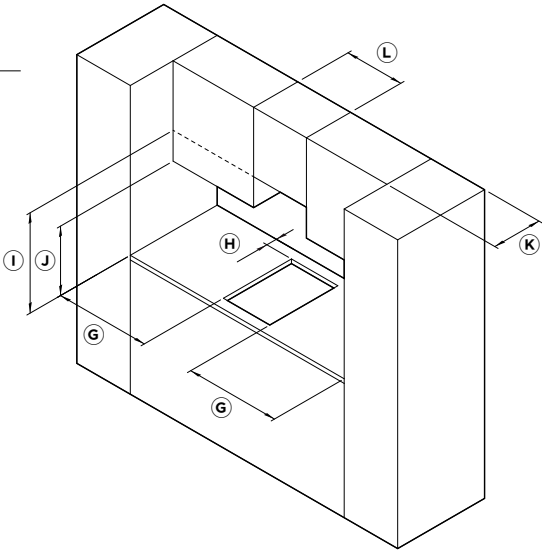


CABINETRY CLEARANCE DIMENSIONS		Induction & Tepanyaki		Gas on Glass	
		in	mm	in	mm
G	Minimum clearance from side edges of cutout to nearest combustible surface	1 3/16	29	4 3/4	120
H	Minimum clearance from rear edge of cutout to nearest combustible surface	7/8	21	3 3/8	85
I	Minimum clearance from countertop to: Overhead cabinet centered above the cooktop (unprotected) Overhead cabinet centered above the cooktop (protected) Range hood	24	610	30	724
J	Minimum clearance from countertop to overhead cabinet not directly above cooktop	18	457	18	457
K	Maximum depth of overhead cabinetry	13	330	13	330
L	Minimum distance between overhead cabinets (not centered above cooktop)	combined cooktop width		combined cooktop width	

IMPORTANT NOTE

Gas on Glass modules have greater clearance requirements compared to Induction and Teppanyaki modules. For multiproduct installations ensure clearances are achieved for the product with the greater clearance requirements.


The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

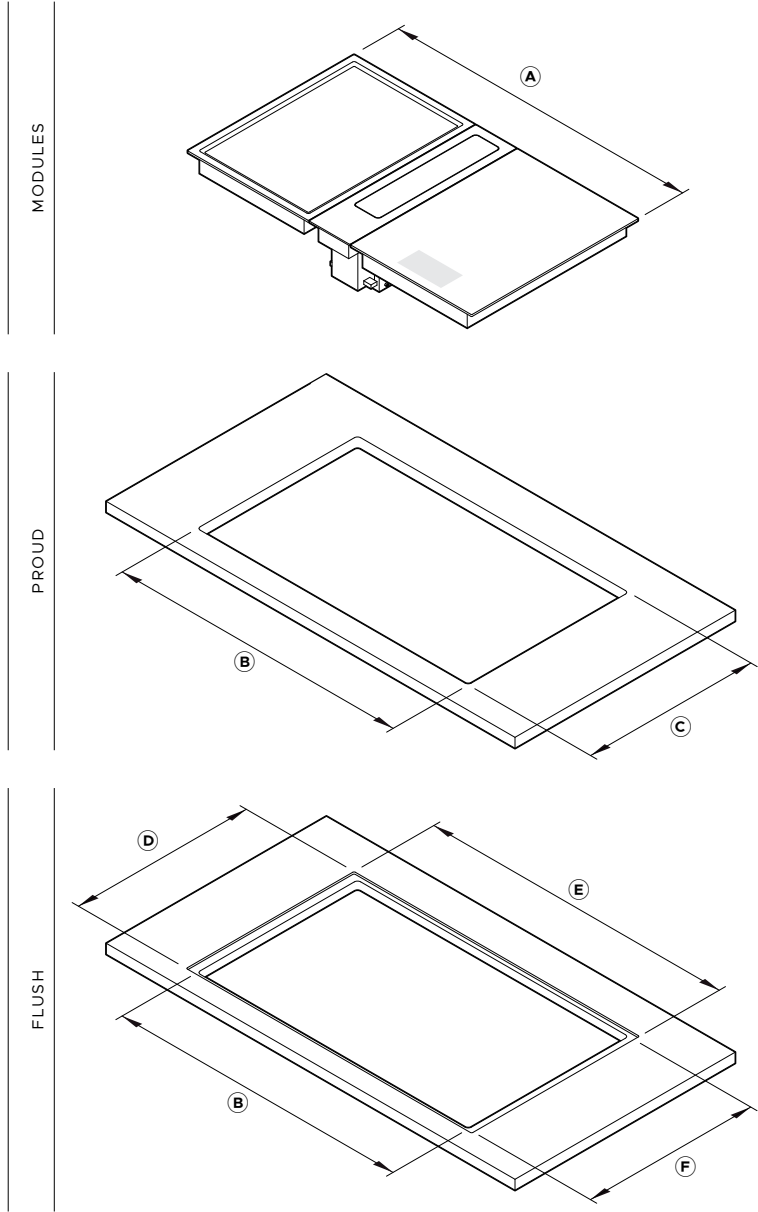

COMBINED COUNTERTOP EQUATIONS						
Pairings of modular products have been designed to fit in a singular countertop cutout. When grouping modules it is essential to calculate their combined cutout requirements. The following equations can be used to guide calculations.						
For dimensions of common configurations please refer to subsequent pages.						
A	OVERALL WIDTH OF MODULES	=	COMBINED PRODUCT WIDTHS add module widths	+	GAPS BETWEEN MODULES 5/32" (2mm) x (number of modules -1)	
B	WIDTH OF CUTOUT FLUSH AND PROUD	=	OVERALL WIDTH OF MODULES	-	LEFT OVERHANG 3/4" (19mm) Induction / Teppanyaki / Gas OR 5/8" (16mm) Downdraft	- RIGHT OVERHANG 3/4" (19mm) Induction / Teppanyaki / Gas OR 5/8" (16mm) Downdraft
C	DEPTH OF CUTOUT PROUD	=	19 31/32" (507mm)			
B	WIDTH OF CUTOUT FLUSH AND PROUD	=	OVERALL WIDTH OF MODULES	-	LEFT OVERHANG 3/4" (19mm) Induction / Teppanyaki / Gas OR 5/8" (16mm) Downdraft	- RIGHT OVERHANG 3/4" (19mm) Induction / Teppanyaki / Gas OR 5/8" (16mm) Downdraft
D	DEPTH OF CUTOUT FLUSH	=	20 1/32" (509mm)			
E	WIDTH OF RECESS FLUSH	=	OVERALL WIDTH OF MODULES	+	5/32" (4mm) 5/32" (2mm) each side	
F	DEPTH OF RECESS FLUSH	=	21 1/32" (534mm)	=	20 7/8" (530mm) product depth	+ 5/32" (4mm) 5/32" (2mm) top and bottom

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

SINGLE - COMPACT < 24"




① SINGLE WITH MODULAR VENTILATION - 15

Dimensions	WxDxH	in	mm
Combined Module Size	20 3/8 x 20 7/8 x 7 1/16	517 x 530 x 180	
Proud cutout*	19 x 19 31/32	482 x 507	
Flush cutout*	19 x 20 1/16	482 x 509	
Flush recess	20 17/32 x 21 1/32 x 1/4	521 x 534 x 6.5	

*Cutout width not central to overall width of modules. Offset specific to placement of downdraft unit to the left or right. Side overhangs differ for downdraft and cooktop - downdraft 5/8" (16mm), cooktops 3/4" (19mm). Refer 'Countertop Installation Details' for more information.

TWO IN A ROW - MID 36"




② TWO IN A ROW WITH MODULAR VENTILATION - 15+15

Dimensions	WxDxH	in	mm
Combined Module Size	35 5/8 x 20 7/8 x 7 1/16	904 x 530 x 180	
Proud cutout*	33 15/16 x 19 31/32	862 x 507	
Flush cutout*	33 15/16 x 20 1/16	862 x 509	
Flush recess	35 3/4 x 21 1/32 x 1/4	908 x 534 x 6.5	

*Glass overhang at sides adjusted to fit 35 7/16" (900mm) cabinet constructed from 3/4" (19mm) panels. 34 1/8" (866mm) width cutout recommended if cabinetry construction allows.

THREE IN A ROW - WIDE > 48"

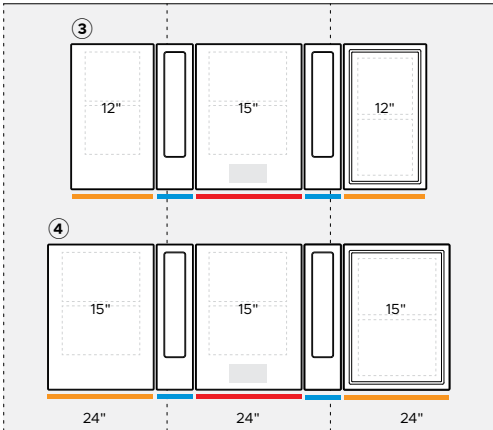


③ THREE IN A ROW WITH MODULAR VENTILATION - 15+12+12

Dimensions	WxDxH	in	mm
Combined Module Size	49 5/16 x 20 7/8 x 7 1/16	1253 x 530 x 180	
Proud cutout	47 7/8 x 19 31/32	1215 x 507	
Flush cutout	47 7/8 x 20 1/16	1215 x 509	
Flush recess	49 1/2 x 21 1/32 x 1/4	1257 x 534 x 6.5	

④ THREE IN A ROW WITH MODULAR VENTILATION - 15+15+15

Dimensions	WxDxH	in	mm
Combined Module Size	56 1/16 x 20 7/8 x 7 1/16	1423 x 530 x 180	
Proud cutout	54 9/16 x 19 31/32	1385 x 507	
Flush cutout	54 9/16 x 20 1/16	1385 x 509	
Flush recess	56 3/16 x 21 1/32 x 1/4	1427 x 534 x 6.5	

THREE IN A ROW - EXTRA WIDE > 57"

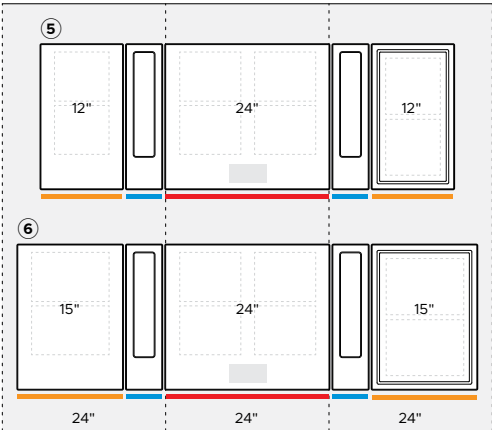

⑤ THREE IN A ROW WITH MODULAR VENTILATION - 24+12+12

Dimensions	WxDxH	in	mm
Combined Module Size	57 13/16 x 20 7/8 x 7 1/16	1468 x 530 x 180	
Proud cutout	56 5/16 x 19 31/32	1430 x 507	
Flush cutout	56 5/16 x 20 1/16	1430 x 509	
Flush recess	57 31/32 x 21 1/32 x 1/4	1472 x 534 x 6.5	

⑥ THREE IN A ROW WITH MODULAR VENTILATION - 24+15+15

Dimensions	WxDxH	in	mm
Combined Module Size	64 1/2 x 20 7/8 x 7 1/16	1638 x 530 x 180	
Proud cutout	63 x 19 31/32	1600 x 507	
Flush cutout	63 x 20 1/16	1600 x 509	
Flush recess	1642.3 x 21 1/32 x 1/4	1642 x 534 x 6.5	

IMPORTANT NOTE

Other configurations are possible.

Cutout widths may not be possible in certain countertop materials. Please refer to countertop suppliers recommendations for material parameters and fabrication recommendations.

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

FISHER & PAYKEL


90003312F

PLANNING GUIDE MODULAR COOKTOPS VERSION F - JULY 2026

© FISHER & PAYKEL LIMITED 2026

PAGE 32

WIDE < 48"

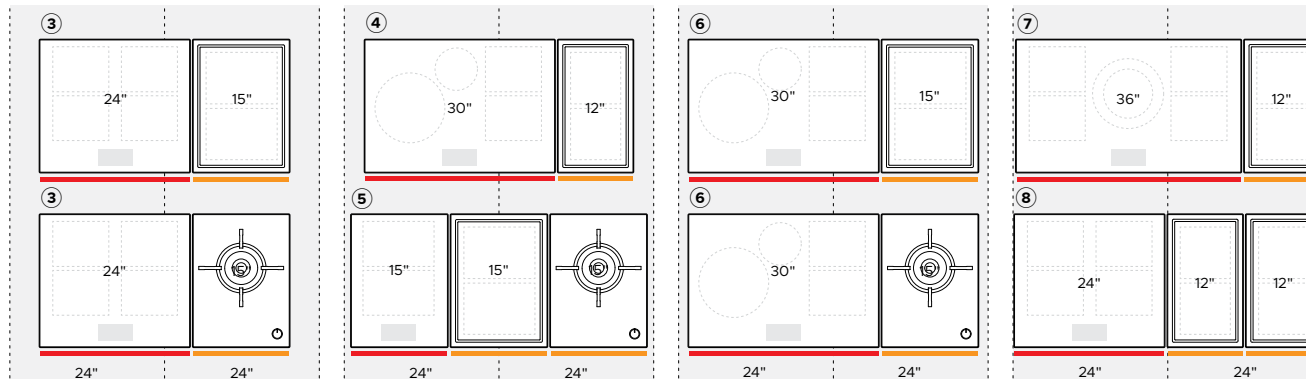

① TWO IN A ROW - $15 + 15$

③ TWO IN A ROW - $24 + 15$

⑥ TWO IN A ROW - $30 + 15$

Dimensions W x D x H	in	mm
Combined Module Size	45 3/16 x 20 7/8 x 3 1/2	1147 x 530 x 89
Proud cutout	43 11/16 x 19 31/32	1109 x 507
Flush cutout	43 11/16 x 20 1/4	1109 x 509
Flush recess	45 5/16 x 21 1/32 x 1/4	1151 x 534 x 6.5

② TWO IN A ROW - $24 + 12$

Dimensions W x D x H	in	mm
Combined Module Size	35 1/2 x 20 7/8 x 3 1/2	902 x 530 x 89
Proud cutout	33 15/16 x 19 31/32	862 x 507
Flush cutout	33 15/16 x 20 1/16	862 x 509
Flush recess	35 11/16 x 21 1/32 x 1/4	906 x 534 x 6.5

*Glass overhang at sides adjusted to fit 35 7/16" (900mm) cabinet constructed from 3/4" (19mm) panels. 34 1/8" (864mm) width cutout recommended if cabinetry construction allows.

IMPORTANT NOTE

Other configurations are possible.

Cutout widths may not be possible in certain countertop materials.

Please refer to countertop suppliers recommendations for material parameters and fabrication recommendations.

④ TWO IN A ROW - $30 + 12$

Dimensions W x D x H	in	mm
Combined Module Size	41 13/16 x 20 7/8 x 3 1/2	1062 x 530 x 89
Proud cutout	40 5/16 x 19 31/32	1024 x 507
Flush cutout	40 5/16 x 20 1/16	1024 x 509
Flush recess	42 x 21 1/32 x 1/4	1066 x 534 x 6.5

⑤ **THREE IN A ROW - $15 + 15 + 15$ ***

Dimensions W x D x H	in	mm
Combined Module Size	45 5/8 x 20 7/8 x 3 1/2	1159 x 530 x 89
Proud cutout	44 1/8 x 19 31/32	1121 x 507
Flush cutout	44 1/8 x 20 1/16	1121 x 509
Flush recess	45 13/16 x 21 1/32 x 1/4	1163 x 534 x 6.5

* Primary and auxiliary cooktops must be adjacent due to communication cable. Gas must be positioned on outside.

⑦ TWO IN A ROW - $36 + 12$

Dimensions W x D x H	in	mm
Combined Module Size	47 5/16 x 20 7/8 x 3 1/2	1202 x 530 x 58
Proud cutout	45 7/8 x 19 31/32	1164 x 507
Flush cutout	45 7/8 x 20 1/16	1164 x 509
Flush recess	47 1/2 x 21 1/32 x 1/4	1206 x 534 x 6.5

⑧ THREE IN A ROW - $24 + 12 + 12$

Dimensions W x D x H	in	mm
Combined Module Size	47 7/16 x 20 7/8 x 3 1/2	1204 x 530 x 58
Proud cutout	45 15/16 x 19 31/32	1166 x 507
Flush cutout	45 15/16 x 20 1/16	1166 x 509
Flush recess	47 9/16 x 21 1/32 x 1/4	1208 x 534 x 6.5

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

COUNTERTOP INSTALLATION

A flush or proud finish between the top surface of the modules and countertop is achievable.

Some overhang details are common left to right or front to back, however there are small dimensional changes between proud and flush, cooking modules and ventilation module.

Care needs to be taken during planning and fabrication to ensure successful installation of modules.

Shimming may be required during flush installation.


SIDE OVERHANGS

COOKTOP MODULES



FRONT VIEW

DOWNDRAFT MODULE



FRONT VIEW

FRONT + REAR OVERHANG





ALL MODULES







PROFILE VIEW

COUNTERTOP DETAIL

FLUSH

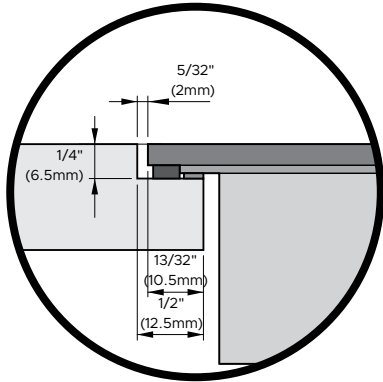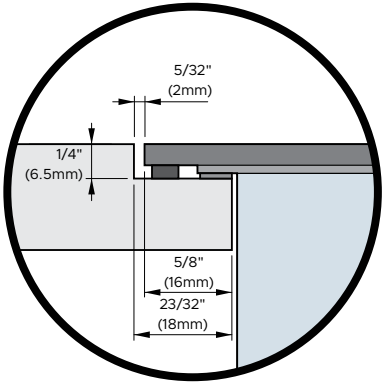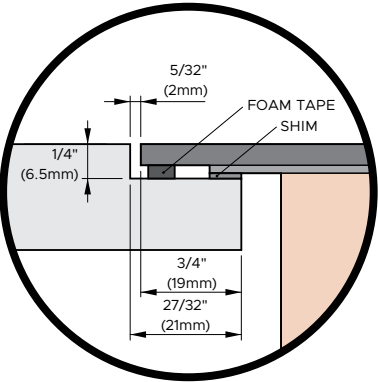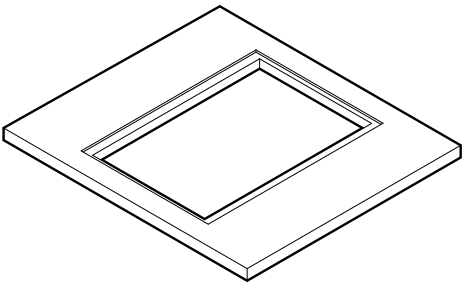

PROUD

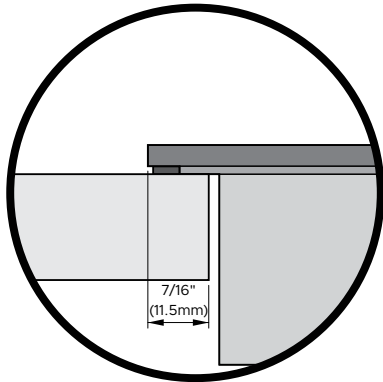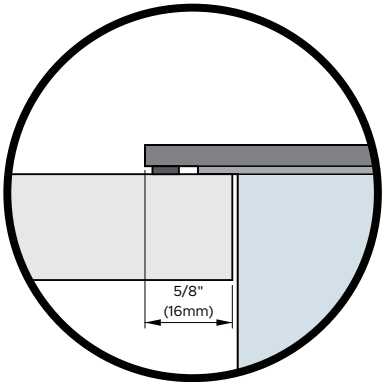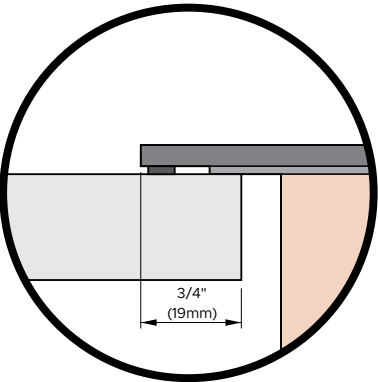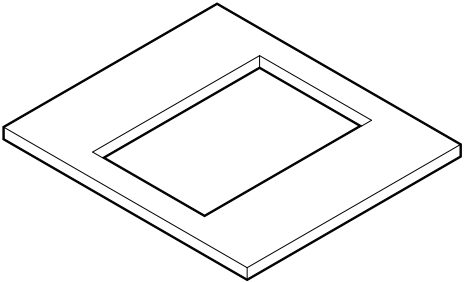


The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com


BRACKET TYPES

COMMON BRACKET

Applies to all bracket locations, excluding rear downdraft




ISO FRONT VIEW

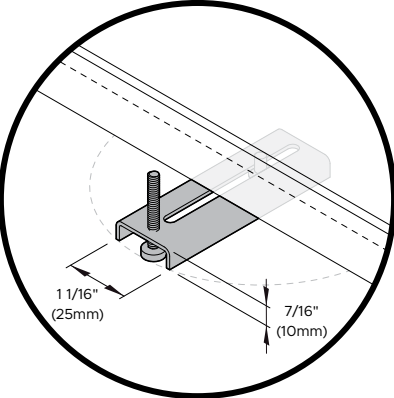


DETAIL A
Can be rotated and moved horizontally

REAR DOWNDRAFT BRACKET



ISO REAR VIEW

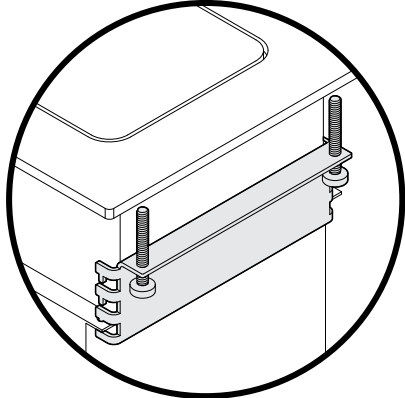


DETAIL B
Bracket can be repositioned vertically

CLEARANCE REQUIREMENTS

ALL MODULES



SIDE VIEW

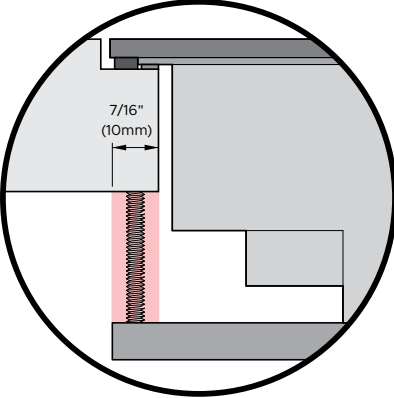

DETAIL C
Minimum clearance common to all brackets left/right and front/rear

CLAMPS

Clamps are supplied with modules to secure their position to benchtop. There are two types, common and rear downdraft.









It is recommended to have 7/16" (10mm) clearance from edge of cutout for clamp engagement.

Clamps are attached to chassis at fixed hole locations. A minimum of 2 clamps are required per module, it is recommended they are positioned on opposite sides of each module eg. left and right or front and rear.

For more details please refer to Install Guide.

CLAMP FIXING LOCATIONS

PLAN VIEW
Minimum of 2 clamps per module.



The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com



FISHER & PAYKEL

90003312F

PLANNING GUIDE MODULAR COOKTOPS VERSION F - JULY 2026

© FISHER & PAYKEL LIMITED 2026

PAGE 35

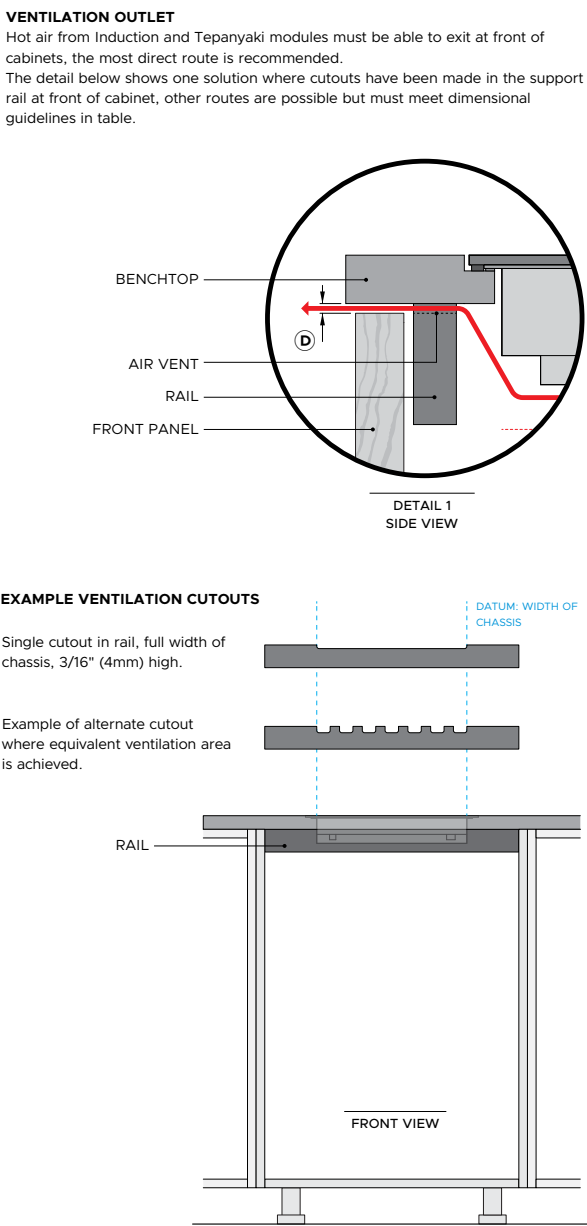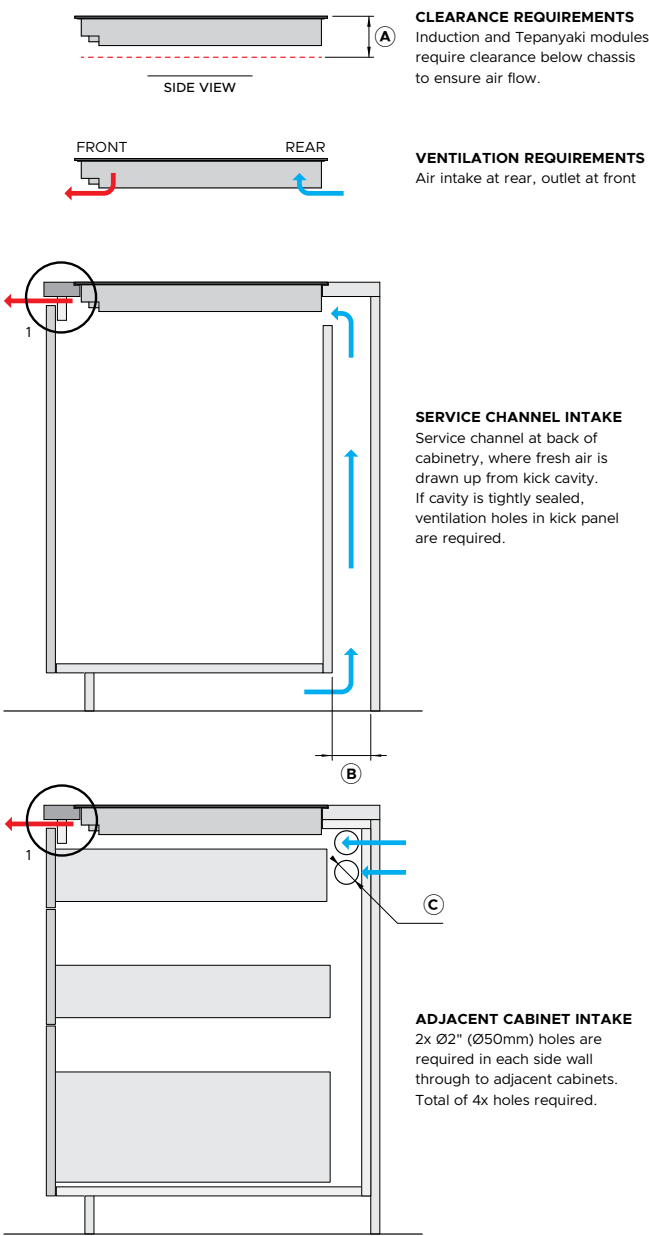

VENTILATION OVERVIEW

The Induction and Tepanyaki modules require ventilation to allow cooling of the electronic components within the chassis. Cooling fans are located on the base of the product drawing cool air into the rear of the product while hot air exits from vents at the front.

Provisions are required in cabinetry to allow fresh air to enter and hot air to exit to ensure product ventilation and optimum product performance.

When multiple products are installed their individual ventilation requirements must also be combined.


Gas on Glass modules do not require ventilation.

CLEARANCE REQUIREMENTS	in	mm
A Clearance below chassis from top of cook surface		
Induction 12", 15"	2 7/8	72
Induction 24", 30", 36"	3 5/8	91
Tepanyaki 12", 15"	3 7/16	86
Gas on Glass 15"	3	76


VENTILATION REQUIREMENTS *	in	mm	in ²	cm ²
INTAKE at rear				
B via service channel, min depth	13/16	20	-	-
C through adjacent cabinets, per side wall**	2x Ø2"	2x Ø50	6.2	40
OUTLET at front*				
D 3/16" (4mm) gap along width of chassis				
12"	10 1/16 x 3/16	255 x 4	1.6	10
15"	13 3/8 x 3/16	340 x 4	2.2	14
24"	21 7/8 x 3/16	555 x 4	3.4	22
30"	29 15/16 x 3/16	715 x 4	4.7	30
36"	33 11/16 x 3/16	855 x 4	5.3	34

* Not required for Gas on Glass modules
** Vents with equivalent-sized area possible. Must be positioned in front of product.


The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

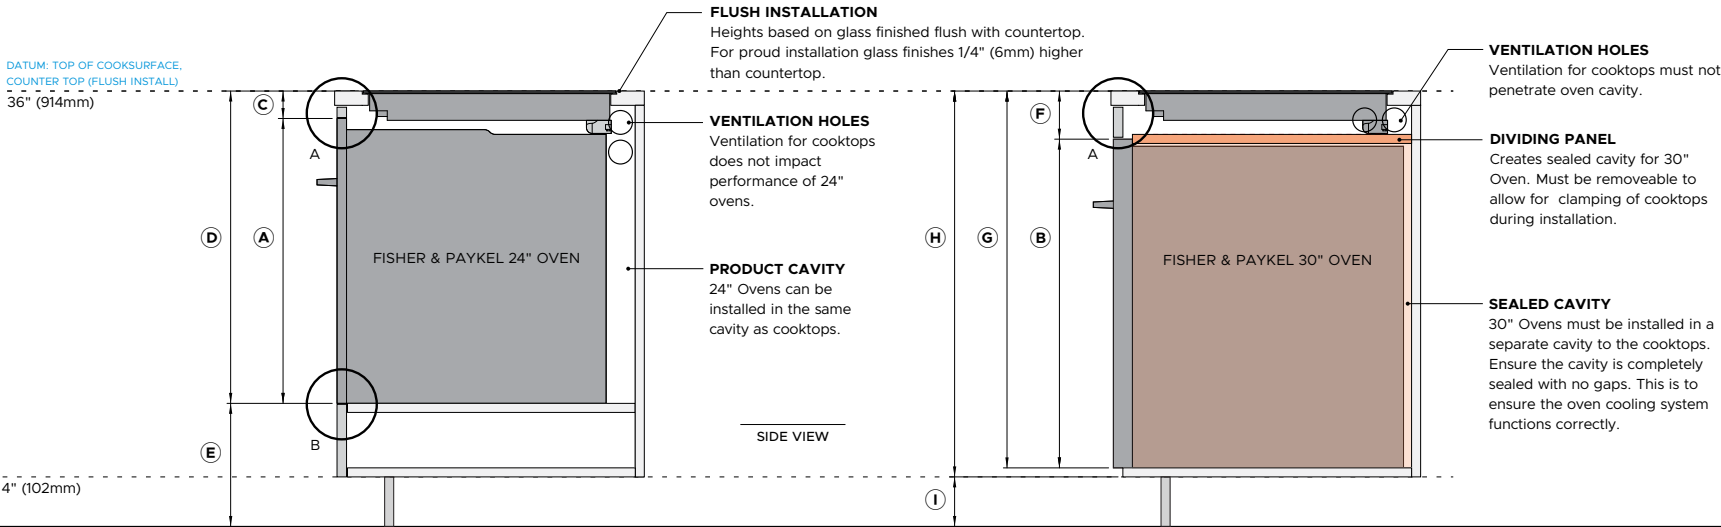

OVEN CLEARANCE TO PANELS
A minimum vertical clearance of 1/16\"



DETAIL A - TOP OF OVEN



DETAIL B - BASE OF OVEN

INSTALLATION WITH OVENS

Fisher & Paykel 24" and 30" Built in Ovens can be installed under modular cooktops.

This overview is based on minimum vertical clearance requirements between cooktop, oven and cabinetry (where required). A benchtop height of 36" (914mm) has been used for calculations.

When installing multiple cooktops the product with the greatest height to oven should be used to determine cabinetry requirements.

BUILT IN OVEN DIMENSIONS		in	mm
24" OVEN - OB24SDPTDX2, OB24SMPTDB1, OB24SMPTNB1, OB24SD16PLX1, OB24SD11PLX1, OB24SCD9PB1			
A	Height of oven	23 9/16	598
	Width of oven	23 7/16	596
30" OVEN - OB30SPPTX1, OB30SDPTDB1, OB30SDPTDX2, OB30SD17PLX1, OB30SD14PLX1			
B	Height of oven	27 3/16	690
	Width of oven	29 15/16	760

CABINETY DIMENSION OVERVIEW		in	mm
24" OVEN OB24			
Induction 24" 30" 36"			
C	Minimum height from top of cooksurface to top of oven	2 7/16	61
D	Minimum height from top of cooksurface to bottom of oven	25 15/16	659
E	Resulting height from bottom of oven to floor *	10 1/16	255
30" OVEN OB30			
Induction 24" 30" 36"			
F	Minimum height from top of cooksurface to top of oven	4	102
G	Minimum height from top of cooksurface to bottom of oven	31 1/8	791
H	Minimum height from top of cooksurface to bottom of cabinet **	31 7/8	810
I	Resulting kick height from bottom of cabinet * **	4	104

INSTALLATION WITH OVENS


For complete oven specifications please refer to specific Planning Guide, Installation Guide and CAD.

in	mm	in	mm	in	mm	in	mm
Induction 12", 15"		Teppanyaki 12", 15"		Gas on Glass 15"		Modular Ventilation	
1 15/16	49	2 1/2	63	2 1/8	53	6 7/16	164
25 1/2	647	26	661	25 5/8	651	30	762
10 1/2	267	10	253	10 3/8	263	6	152
Induction 12", 15"		Teppanyaki 12", 15"		Gas on Glass 15"		Modular Ventilation	
3 1/4	83	3 13/16	97	3 7/16	87	7 13/16	198
30 7/8	772	30 15/16	786	30 9/16	776	34 15/16	887
31 1/8	791	31 11/16	805	31 5/16	795	35 11/16	906
4 13/16	123	4 5/16	109	4 11/16	119	5/16	8

* Based on countertop height of 36" (914mm) with cooktops installed flush with countertop, with cooktops and ovens installed to minimum clearance specifications.
** Nominal panel thickness of 3/4" (19mm) used for cabinetry carcass and dividing panel. Thickness of panels can be reduced if airtightness and sufficient strength to support oven can be maintained.

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

MODULAR VENTILATION COMPONENTS

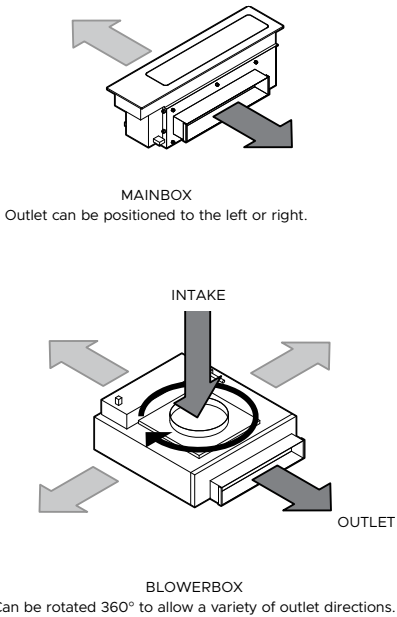


IMPORTANT

Blowerbox inlet and outlet are offset, component is not symmetrical.


CARE TO BE TAKEN WHEN PLANNING.

It is essential to work with CAD downloads of modular ventilation components to design a ducting layout best suited to specific cabinetry requirements.

DUCT ROUTING

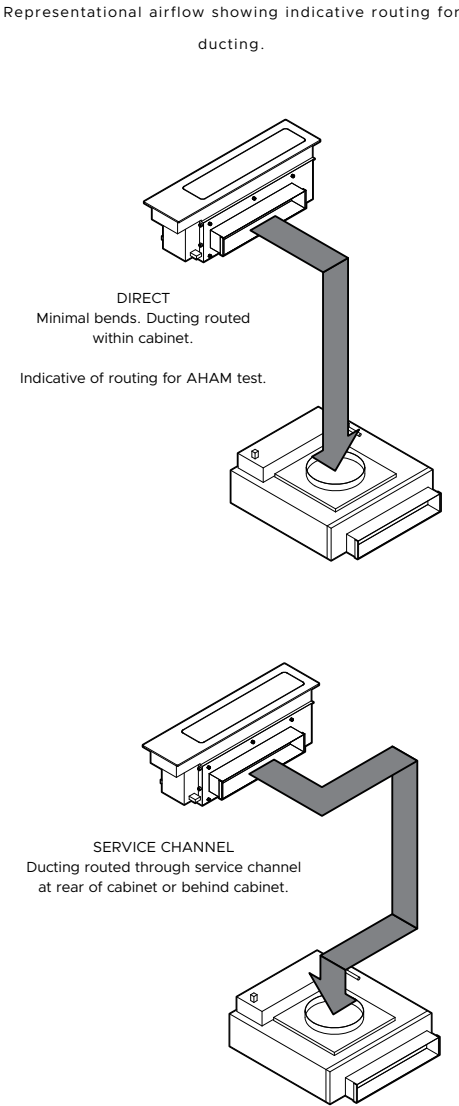

VENTING

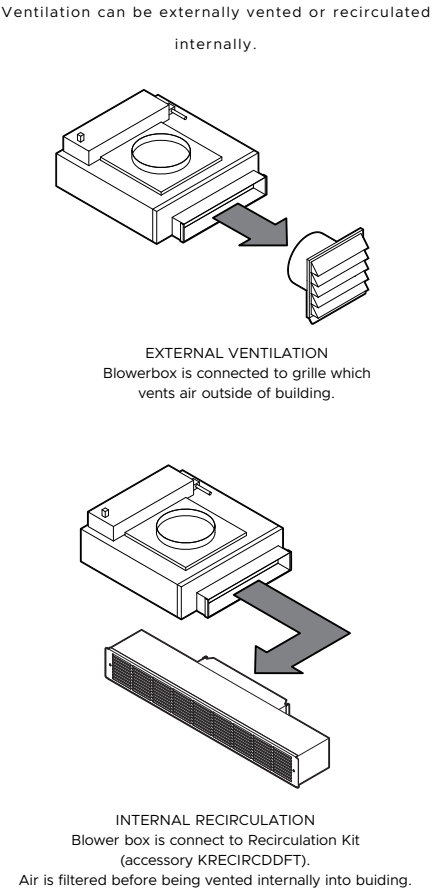

IMPORTANT

Air vented from multiple blower boxes must be not be connected to a common external vent or recirculation kit.

MODULAR VENTILATION

The Auxiliary Modular Ventilation system is comprised of two key components, the mainbox and blowerbox. The mainbox is positioned alongside modular cooktops in the countertop, while the blowerbox can be positioned on the floor within cabinetry or below the floor eg. basement.

The units are supplied with 3.25" x 12" outlets which will accommodate metal ducting of equivalent size. Alternate outlet adapters are available to suit 2.25" x 12" duct systems.

IMPORTANT:

Model not supplied with ducting.

Use only metal ductwork to reduce the risk of fire.

Do not use flexible ducting.


Venting directly into the cabinet with no vent is not permitted. Do not vent exhaust air into spaces within the walls or ceilings or into attics, crawl spaces, or garages.

WARNING:


The Modular Ventilation unit cannot be used alongside a gas cooktop.

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

DIRECT ROUTING

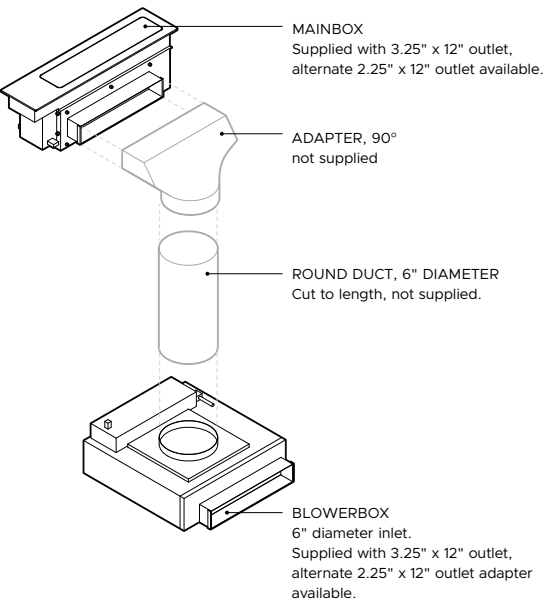

ROUTING THROUGH SERVICE CHANNEL

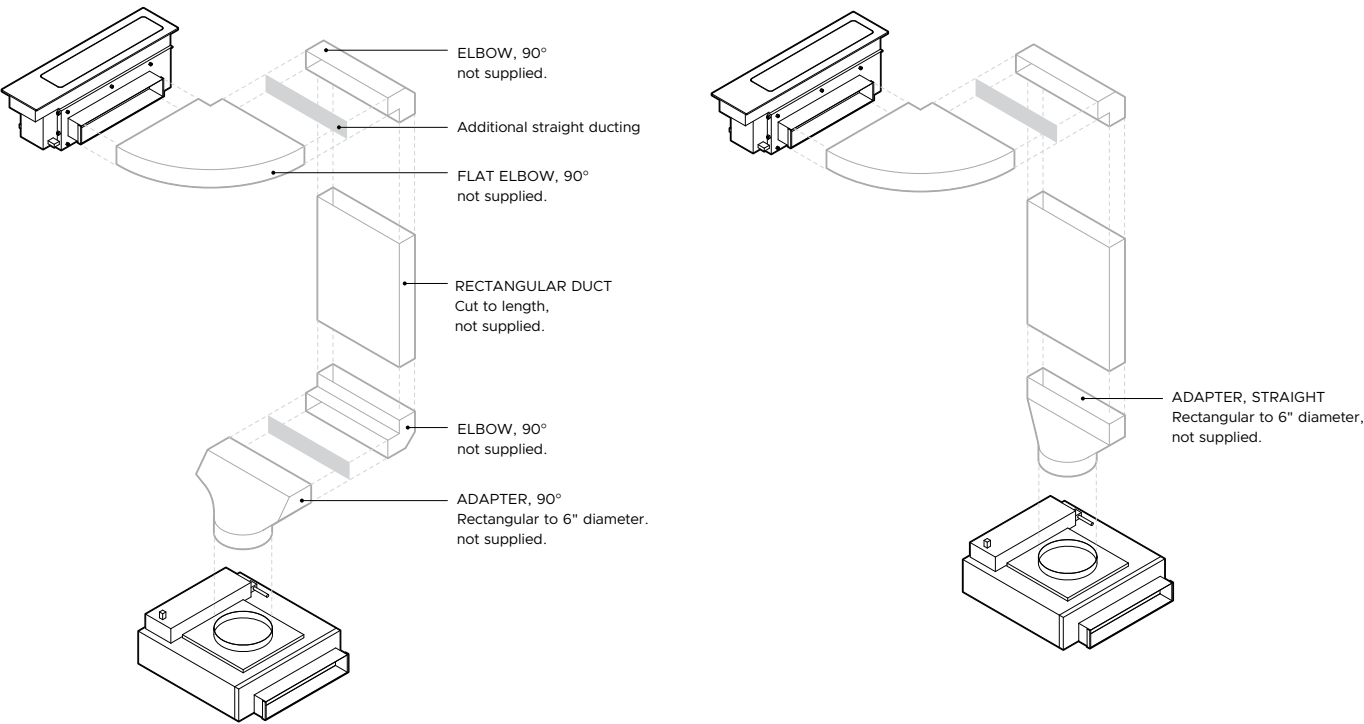

IMPORTANT

AHAM test performed with direct routing.


DUCTING SCENARIO EXAMPLES

Diagrams are to provide examples of possible ducting layouts.

Ducting components and layout are indicative only and should be adapted to suit specific cabinetry requirements.

Ducting is shown for reference only. Fisher & Paykel does not supply ducting parts. These can be purchased from most hardware stores.

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

COMPONENT		EQUIVALENT LENGTH OF 3.25X12"
	Metal straight ducting – 1ft length (3.25x12")	1 ft
	Metal rectangular to round bend - 90° (3.25x12" to 6")	5 ft
	Metal rectangular to round transition – straight (3.25x12" to 6")	4ft
	Metal horizontal bend - 90° (3.25x12")	17 ft
	Metal vertical bend - 90° (3.25x12")	25 ft
	Metal straight ducting – 1ft length (6" round)	1.7 ft
	Round Metal bend - 90° (6" round)	17 ft

RECOMMENDED DUCT LENGTH

3.25 x 12" ducting components are recommended for optimum extraction performance.

Total equivalent length of ducting after the blower box is recommended to be less than 100ft.

Refer to table for estimated equivalent lengths for various duct components. Wall outlet cap has been taken into consideration. Do not include in equivalent feet calculations.


Fisher & Paykel does not supply ducting components.

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

BLOWERBOX CUTOUT

The Blowerbox requires a minimum cutout of 15 3/8" x 18 1/2" (390mm x 470mm) in base of cabinetry so it can be positioned on the floor.

For ease of installation and connection to outlet ducting it is recommended that the cutout is increased to 15 3/8" x 22 7/16" (390mm x 570mm).

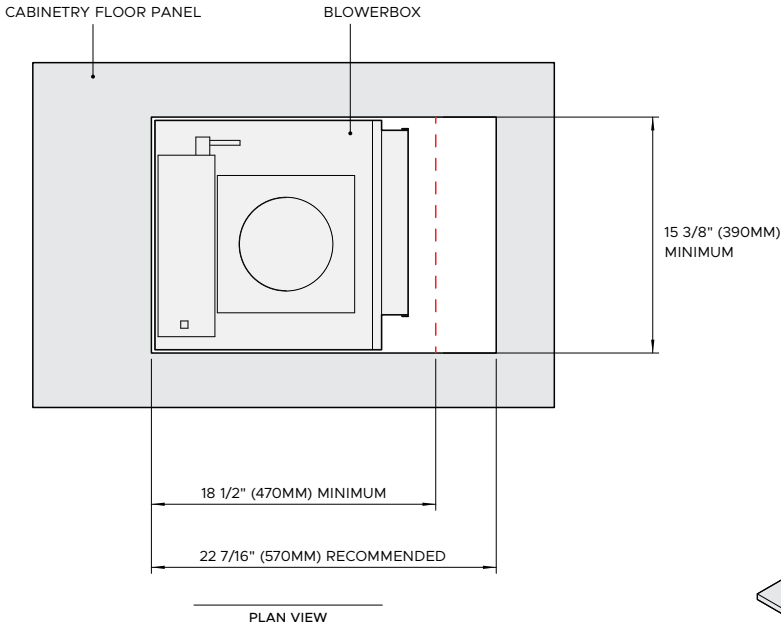

IMPORTANT

The position of the cutout may not be central to floor panel.


Pre-planning is required. It is essential to work with CAD downloads of modular ventilation components to design a layout suited to specific cabinetry requirements.

BLOWERBOX INSTALLATION OVERVIEW

PLEASE NOTE

Ducting is not included.

Illustration is representational only.

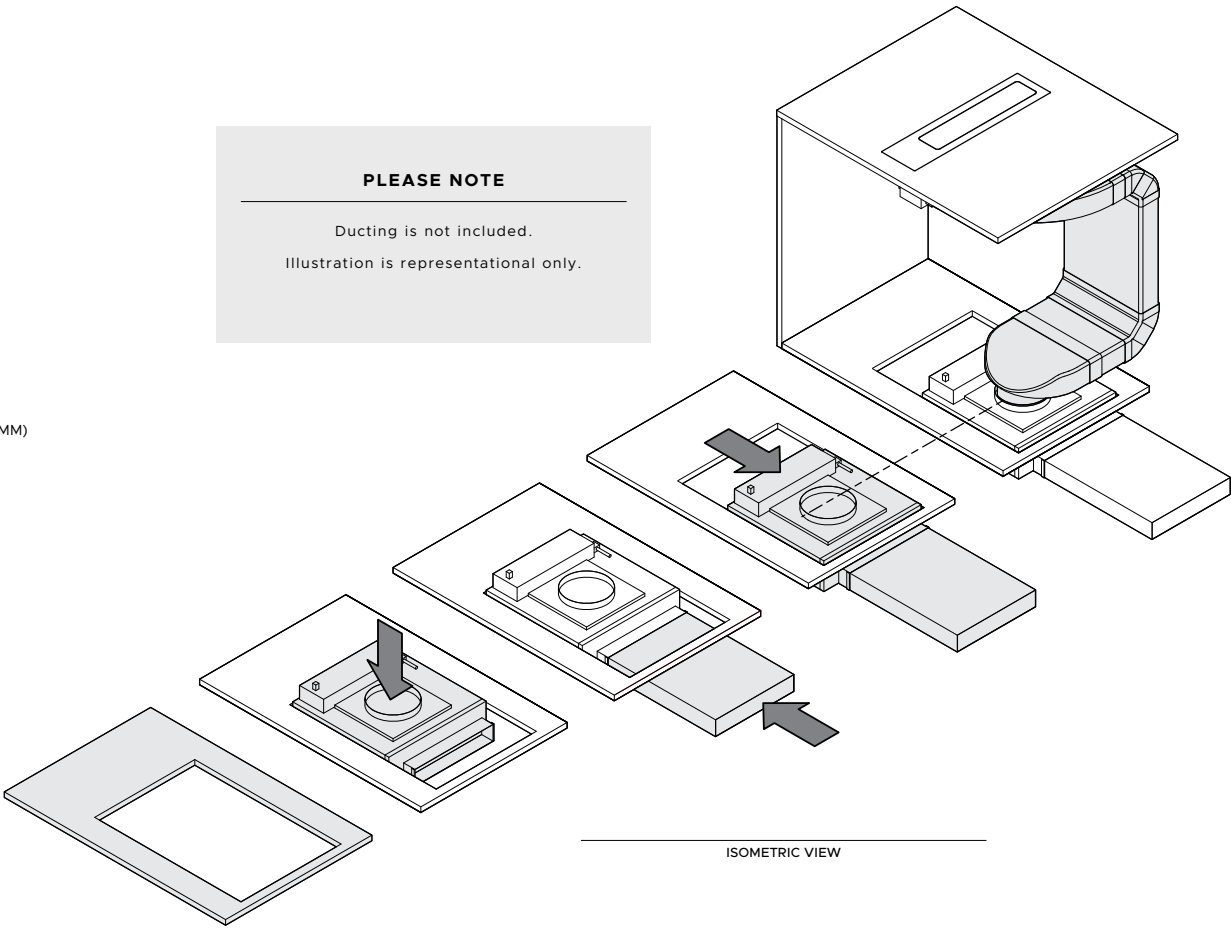

①

Cut hole in bottom of
cabinetry panel

②


Lower blowerbox onto
floor.

③

Oversized hole allows
access to connect
ducting

④

Blowerbox repositioned to
achieve alignment with ducting.



TOP VIEW

FRONT VIEW

POWER CABLE

COMMUNICATION PORT


PRIMARY MODULAR INDUCTION COOKTOP, 15"

2 ZONES WITH SMARTZONE

Model no:

CI152DTTB1

Dimensions	in	mm
Power Cable	74 13/16	1900




TOP VIEW

FRONT VIEW

Model no:

CI244DTTB1

Dimensions	in	mm
Power Cable	54 5/16	1380




TOP VIEW

FRONT VIEW

Model no:

CI304DTTB1

Dimensions	in	mm
Power Cable	54 5/16	1380




TOP VIEW

FRONT VIEW

Model no:

CI365DTTB1

Dimensions	in	mm
Power Cable	54 5/16	1380



TOP VIEW

FRONT VIEW


Model no:

CD5DB1


Dimensions	in	mm
External Communication Harness*	19 11/16	500
Central Communication Harness*	66 15/16	1700
Power Cable	28	720

* x1 supplied with each auxiliary unit

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com



TOP VIEW




FRONT VIEW

AUXILIARY MODULAR INDUCTION COOKTOP, 12", 2 ZONES WITH SMARTZONE


Model no:
C1122DB1

Dimensions	in	mm
External Communication Harness*	19 11/16	500
Power Cable*	74 13/16	1900

* x1 supplied with each auxiliary unit



TOP VIEW




FRONT VIEW

AUXILIARY MODULAR TEPPANYAKI COOKTOP, 12", 2 ZONES


Model no:
C1T122DX1

Dimensions	in	mm
External Communication Harness*	19 11/16	500
Power Cable*	74 13/16	1900

* x1 supplied with each auxiliary unit



TOP VIEW




FRONT VIEW

AUXILIARY MODULAR INDUCTION COOKTOP, 15", 2 ZONES WITH SMARTZONE


Model no:
C1152DB1

Dimensions	in	mm
External Communication Harness*	19 11/16	500
Power Cable*	74 13/16	1900

* x1 supplied with each auxiliary unit



TOP VIEW




FRONT VIEW

AUXILIARY MODULAR TEPPANYAKI COOKTOP, 15", 2 ZONES

Model no:
C1T152DX1

Dimensions	in	mm
External Communication Harness*	19 11/16	500
Power Cable*	74 13/16	1900

* x1 supplied with each auxiliary unit



TOP VIEW




FRONT VIEW

GAS ON GLASS MODULAR COOKTOP, 15"



Model no:
CG151DLPGB5 LPG
CG151DNGGB5 Natural Gas

Dimensions	in	mm
Power Cable	45 11/16	1160

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

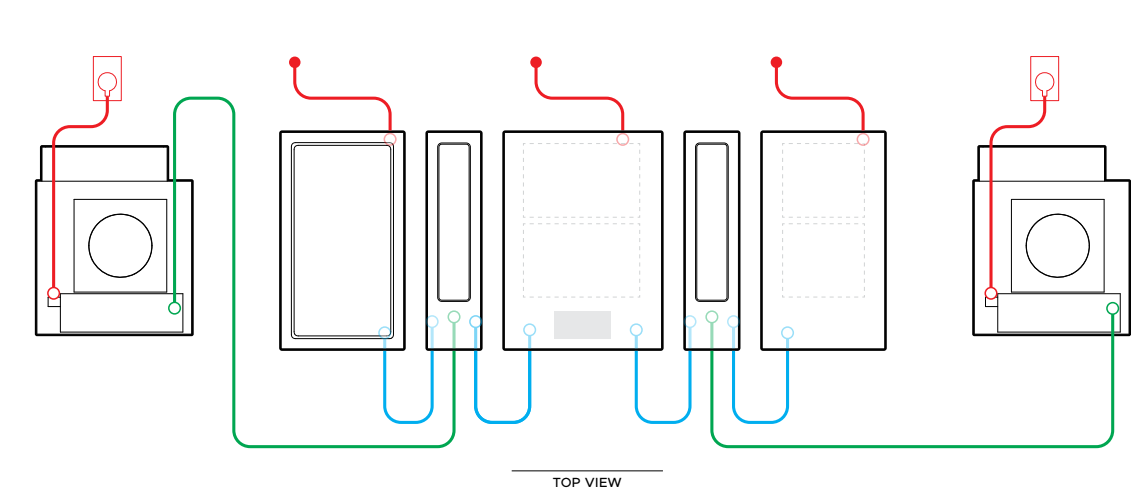

- EXTERNAL COMMUNICATION HARNESS
- CENTRAL COMMUNICATION HARNESS
- POWER CABLE

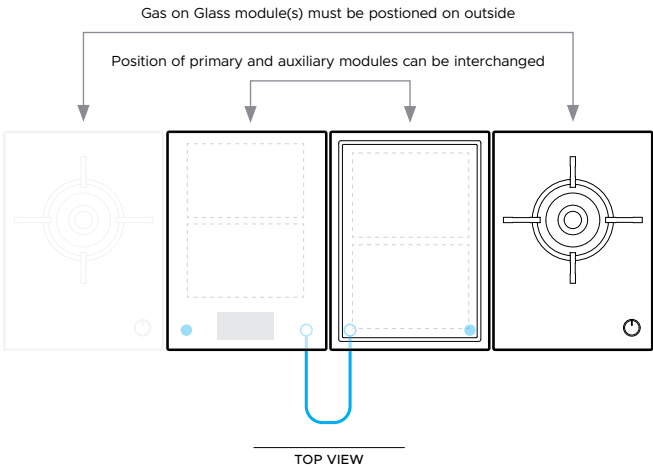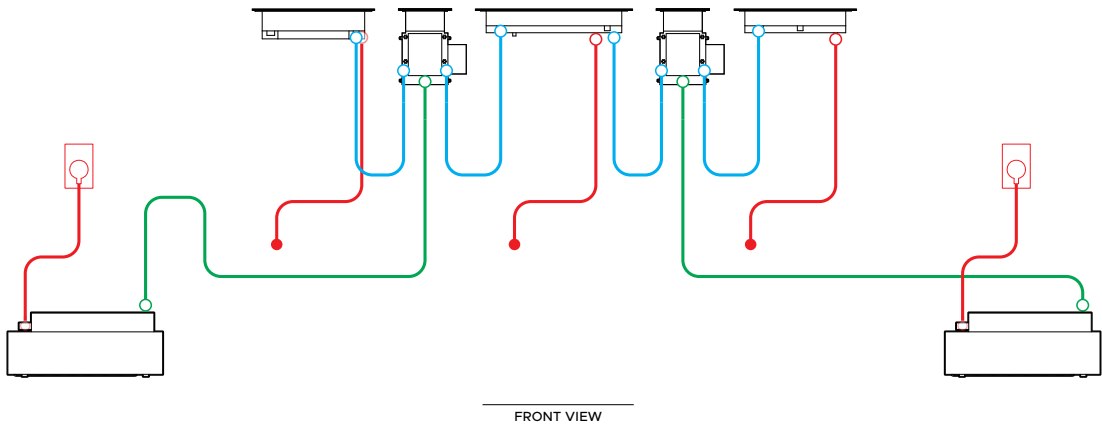

SUPPLIED HARNESS

External communication harnesses connect auxiliary modules to the primary module.

These connections must be to the product directly adjacent in a 'daisy chain' configuration (refer diagram). Gas on glass modules do not require a communication harness and must not be placed between primary and auxiliary modules.

1x External communication harness is supplied with each auxiliary module (induction, teppanyaki and downdraft ventilation).

1x Central communication harness is supplied with auxiliary modular ventilation to connect downdraft mainbox with blowerbox.

ELECTRICAL SERVICE FOR MULTIPLE PRODUCT INSTALLS

Where multiple products are being installed together, it is possible to use a smaller local distribution board, rather than running multiple separate lines. For example, 2 x 15 A modules can be connected via a single 30 A breaker.

This cooktop must be connected to the mains power supply only by a suitably qualified person.

