
OVEN

INSTALLATION CONSIDERATIONS

Accessing your product specifications

3

FISHER & PAYKEL

NZ AU SG


CONTEMPORARY

OB60SBC5B5, OB60SBC6B5, OB60SBC7B5, OB60NBC7B5,
OB60SBCPGX5, OB60SBCPGB5, OB60SBCGX5, OB60SBCGB5

ACCESSING YOUR PRODUCT SPECIFICATIONS




For full product, cabinetry and service specifications, refer to the Planning Guide. To access the Planning Guide, scan the QR code or visit fisherpaykel.com/specify. Search by appliance type, product name or model code.



PRODUCT DIMENSIONS

mm

(A)	Overall height	598
(B)	Overall width	596
(C)	Chassis height	575
(D)	Chassis width	556
(E)	Chassis depth	545
(F)	Control panel thickness	20

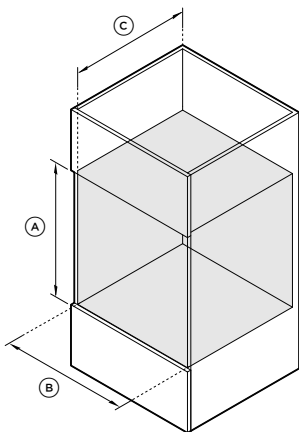

CAVITY DIMENSIONS

mm

(A)	Minimum inside height of cavity	580
(B)	Minimum inside width of cavity	560
(C)	Minimum inside depth of cavity*	550
	Recommended cabinet height	600
	Recommended cabinet width	600

*Measured from front of chassis.

SPECIFICATIONS

DEDICATED CIRCUIT (A)

16

SUPPLY (Hz)

50

VOLTAGE (V)

220 - 240

OB60 MODELS

FISHERPAYKEL.COM

© Fisher & Paykel Appliances 2026. All rights reserved.

The models shown in this guide may not be available in all markets
and are subject to change at any time.

The product specifications in this guide apply to the specific products and models
described at the date of issue. Under our policy of continuous product improvement,
these specifications may change at any time.

For current details about model and specification availability in your country,
please go to our website or contact your local Fisher & Paykel dealer.

433364A 01.26