

HTDWD1060TB1 - Dark

10kg + 6kg 600 Series Multi Washer Dryer

Haier



Height

1370-1385mm

Width

600mm

Depth

598mm

Weight (Packaged)

159kg

Weight (Product)

144kg

OVERVIEW

Designed for busy homes that care about laundry separation. With a 10kg + 6kg heat pump washer dryer main drum and two specialist washer dryers, you can stop stressing about which clothes you can mix and what needs to wait. Give that smelly sports top a quick wash, target an ink stain on a pair of school shorts, and wash and dry all the towels in one go — all separately, all at the same time.

FEATURES


- 10kg + 6kg heat pump main drum, plus two specialist washer-dryer drums, all three operating independently at the same time
- 4.5-star washing energy, 4.5-star water and 7-star drying energy ratings
- Smart Dose automatically measures the right amount of detergent for every load, across all three drums
- Essence Wash pre-mixes detergent with water across all three drums before it reaches the fabric
- Express 15 runs across all three drums in 15 minutes; Express 29 completes a main drum load in 29; Add Garment lets you add a missed item mid-cycle
- UV Protect uses UV light to eliminate 99.99% of bacteria across all three drums*
- Anti-Bacterial Treatment (ABT) in the gasket of each drum helps keep the wash environment hygienic between washes
- 7-inch touchscreen controls temperature, spin and rinse independently for each drum
- Stain Treatment targets 12 stain types including oil, ink, coffee and wine — with dedicated settings in their own drum
- Three dedicated direct drive motors, one per drum, for quieter, smoother and more efficient performance

*Independently tested to eliminate greater than 99.99% of Staphylococcus aureus and E. coli using the Smart Wash cycle for the left and right drums, and the Mixed cycle for the main drum

The models shown in this Specification Guide (SG) may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This SG should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website haier.com


Product Overview

PRODUCT DIMENSIONS

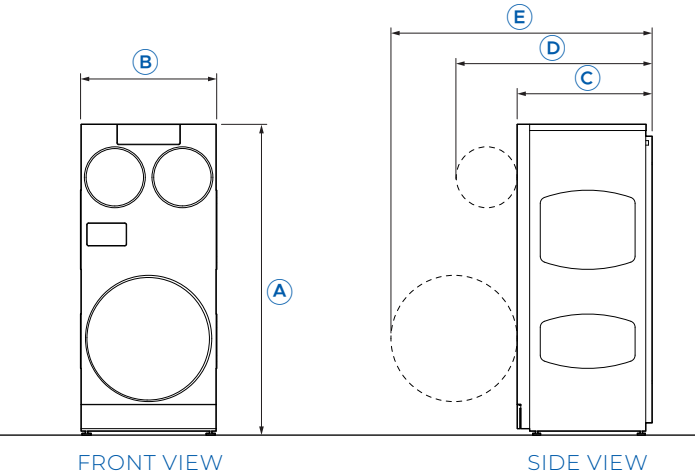

	mm
A Overall height	1370 - 1385
B Overall width	600
C Overall depth (door closed)	598
D Overall depth (upper doors open)	855
E Overall depth (lower door open)	1140

CAVITY DIMENSIONS

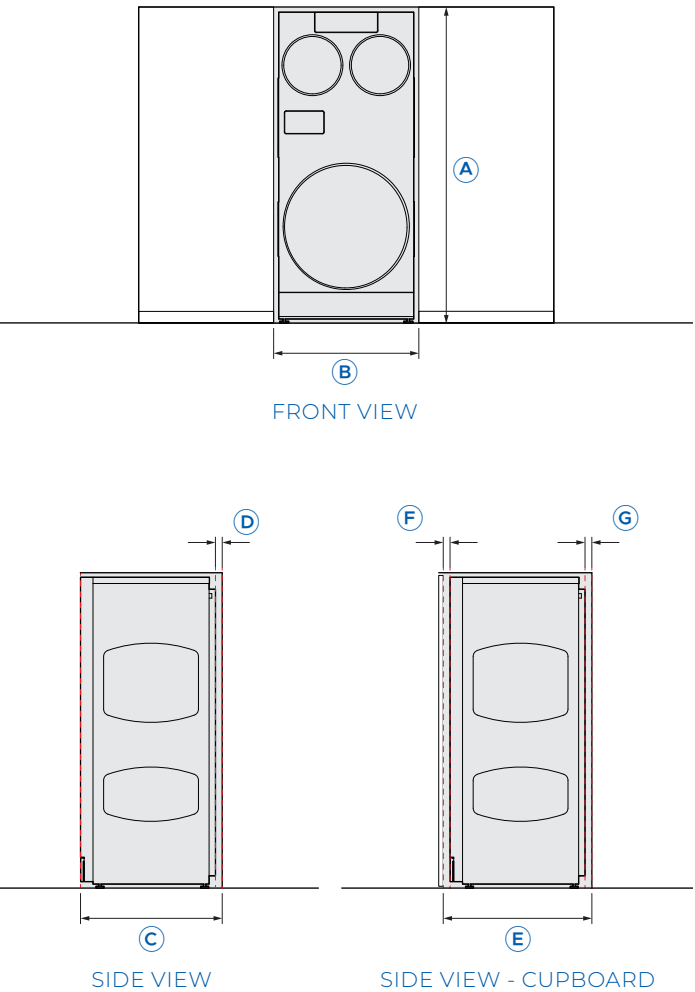

	mm
A Minimum height of cavity	1390
B Minimum width of cavity	640
C Minimum depth of cavity	628
D Minimum clearance at back of cavity	30
E Minimum depth of cavity in cupboard	658
F Minimum clearance at front of cavity for in cupboard	30
G Minimum clearance at back of cavity for in cupboard	30

Note: If installing behind a cabinetry door, it must be hinged on the same side as the product. There must be a minimum clearance of 30mm from the front of the products door to the internal face of the cabinetry door for the product to operate safely.

The enclosed space must be provided with sufficient ventilation to meet local building code requirements or the door must be open while the product is operating.

SERVICES

• Supply	220-240 V, 50 Hz
• Service	10 A
• Connection	Plug with flex cord

The models shown in this Specification Guide (SG) may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This SG should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website haier.com