DISHDRAWER™ DISHWASHERS

PLANNING GUIDE

SERIES 9

INTEGRATED SINGLE | DD60ST4I2 | DD60S4I2 | DD60ST4HI2 | DD60S4HI2

FISHER & PAYKEL

INTRODUCTION

This comprehensive planning guide provides you with the framework and tools to achieve your desired design outcome with Fisher & Paykel appliances. In this guide, you will find a range of conceptual, detailed, and dimensional product information to bring your ideas to life and create spaces that truly reflect your vision.

SUPPORT

For additional design planning and installation support please contact the Fisher & Paykel design support team.
designsupport@fisherpaykel.com

NOTES

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Refer to our website fisherpaykel.com for the latest document version. Product specifications may vary from those shown.
This Planning Guide should not be used as installation guidance for any product. Specific installation guidance will be available with the product on delivery and on our website.

CONTENTS

CONCEPT DESIGN ⓘ	PAGE
Design choices	**3**
Built-under dishwashers	**5**
Integrated dishwashers	**6**
Specification guide	**7**
DD60ST4I2, DD60S4I2, DD60ST4HI2, DD60S4HI2	**8**

DEVELOPED AND DETAILED DESIGN ⓘ	PAGE
Data sheets	**9**
DD60ST4I2, DD60ST4HI2 - Custom drawer panel	**10**
DD60ST4I2, DD60ST4HI2 - Stainless steel panel	**11**
DD60S4I2, DD60S4HI2 - Custom drawer panel	**12**
DD60S4I2, DD60S4HI2 - Stainless steel panel	**13**
Accessories	**14**
Accessory handles and stainless steel panels	**15**
Planning considerations	**16**
Cavity specifications	**17**
Custom panels - extending and adjusting	**18**
Side by side dishwasher installation	**19**
Cooldrawer™ and dishwasher side by side	**20**

DEVELOPED AND DETAILED DESIGN	PAGE
Custom drawer panel preparation	**21**
DD60ST4I2, DD60ST4HI2	**22**
DD60S4I2, DD60S4HI2	**23**
Venting specifications	**24**
Ventilation & ducting options	**25**
Services	**26**
Service specifications	**27**
Electrical and plumbing specifications	**28**

© FISHER & PAYKEL APPLIANCES LIMITED 2026

DESIGN CHOICES

© FISHER & PAYKEL APPLIANCES LIMITED 2026



CHOOSE YOUR FORMAT
THAT BEST SUITS THE WAY YOU LOAD AND WASH

SINGLE – One independent dishwasher. Place multiple around the home to create distributed cleaning zones, or two side by side for the most ergonomic dishwashing solution.

DOUBLE – Two independent drawers, each able to run individually or simultaneously.

CHOOSE YOUR STYLE
INSTALLATION DESIGNED TO FIT YOUR KITCHEN

INTEGRATED – Designed to sit flush and disappear behind kitchen cabinetry for a seamless, uninterrupted kitchen aesthetic.
Panel-ready or compatible with our Stainless Steel panels sold separately.

CONTEMPORARY – Defined by clean lines and timeless design cues, finished in Stainless Steel or Black Stainless Steel. Available with Proud, Recessed, or Pocket handle styles.

CHOOSE YOUR HEIGHT
HEIGHT DESIGNED TO FIT YOUR KITCHEN

STANDARD – Accommodates full-size dinner plates up to 280mm in diameter. Suitable for bench-height installation.


TALL – Extra usable height accommodates larger dishes and cookware, including full-size dinner plates up to 310mm.


The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

CONTEMPORARY TALL SINGLE

CONTEMPORARY SINGLE

CONTEMPORARY DOUBLE

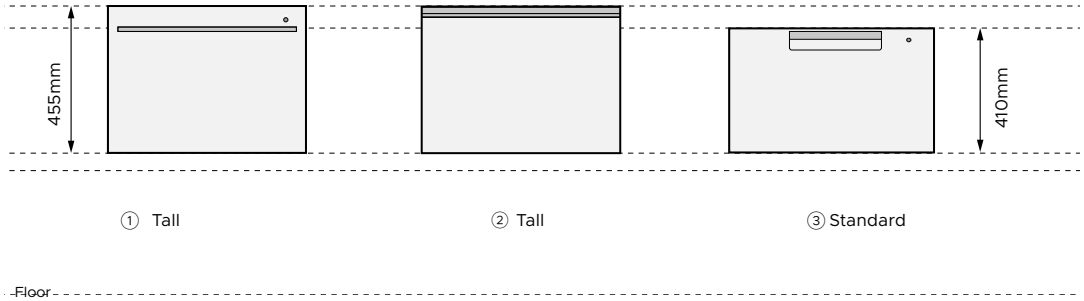


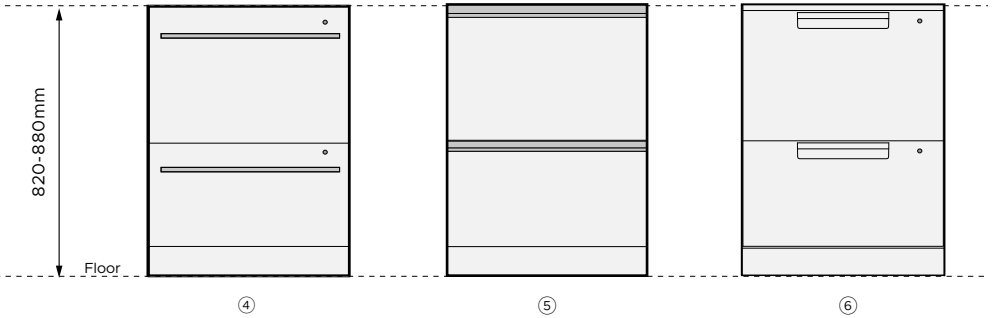


STYLE	MODELS	FINISH	HANDLE STYLE
① Contemporary Tall Single DishDrawer™ Dishwasher Series 9	DD60ST4DX2 DD60ST4HDX2	Stainless Steel Stainless Steel	Contemporary Proud handle
② Contemporary Tall Single DishDrawer™ Dishwasher Series 7	DD60ST2NX2 DD60ST2NB2 DD60ST2HNX2 DD60ST2HNB2	Stainless Steel Black Stainless Steel Stainless Steel Black Stainless Steel	Contemporary Recessed handle
③ Contemporary Single DishDrawer™ Dishwasher Series 7	DD60S2CX2 DD60S2CCX2	Stainless Steel Stainless Steel	Contemporary Pocket handle
④ Contemporary Double DishDrawer™ Dishwasher Series 9	DD60D4DX2 DD60D4HDX2	Stainless Steel Stainless Steel	Contemporary Proud handle
⑤ Contemporary Double DishDrawer™ Dishwasher Series 7	DD60D2NX2 DD60D2NB2 DD60D2HNX2 DD60D2HNB2	Stainless Steel Black Stainless Steel Stainless Steel Black Stainless Steel	Contemporary Recessed handle
⑥ Contemporary Double DishDrawer™ Dishwasher Series 7	DD60D2CX2 DD60D2CCX2	Stainless Steel Stainless Steel	Contemporary Pocket handle

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

INTEGRATED SINGLE

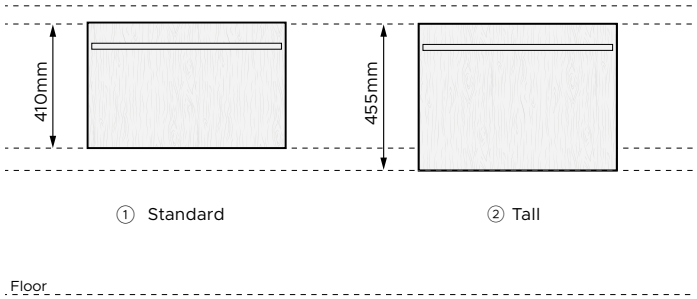

INTEGRATED DOUBLE

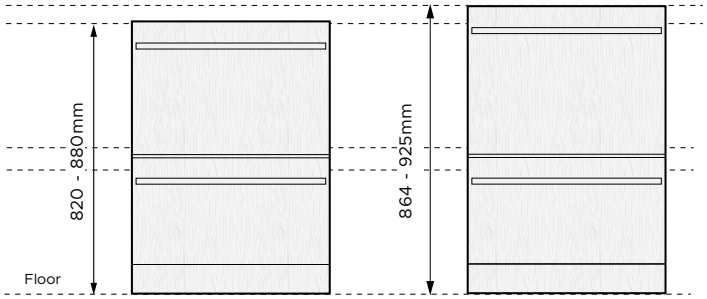

STYLE	MODELS	PANEL OPTIONS	HANDLE OPTIONS
① Integrated Single DishDrawer™ Dishwasher Series 9	DD60S4I2 DD60S4HI2	Custom panel Stainless Steel ADDD60SPX Black Stainless Steel ADDD60SPB	Custom handle, Accessory handles*
② Integrated Tall Single DishDrawer™ Dishwasher Series 9	DD60ST4I2 DD60ST4HI2	Custom panel Stainless Steel ADDD60STPX Black Stainless Steel ADDD60STPB	Custom handle, Accessory handles*
Integrated Tall Single DishDrawer™ Dishwasher Series 11	DD60STX6I1 DD60STX6HI1	Custom panel Stainless Steel ADDD60STPX Black Stainless Steel ADDD60STPB	Custom handle, Accessory handles*
③ Integrated Double DishDrawer™ Dishwasher Series 9	DD60D4I2 DD60D4HI2	Custom panel Stainless Steel ADDD60DPX Black Stainless Steel ADDD60DPB	Custom handle, Accessory handles*
④ Integrated Tall Double DishDrawer™ Dishwasher Series 11	DD60DTX6I1 DD60DTX6HI1	Custom panel Stainless Steel ADDD60DTPX Black Stainless Steel ADDD60DTPB	Custom handle, Accessory handles*

*HANDLES: Contemporary Silver AHD7DDDW60S, Contemporary Black AHD7DDDW60B, Minimal Grey AHM1DDDW60G, Minimal Black AHM1DDDW60B.

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

SPECIFICATION GUIDE

© FISHER & PAYKEL APPLIANCES LIMITED 2026



DD60S4I2, DD60S4HI2



DD60ST4I2, DD60ST4HI2

OVERVIEW

The Series 9 Integrated Single DishDrawer™ Dishwasher is designed for true half-load dish care in a single drawer format. Panel-ready for seamless cabinetry integration, it supports flexible placement within the kitchen, while advanced wash technology and intuitive controls help support improved energy and water efficiency.

The Series 9 Integrated Tall Single DishDrawer™ Dishwasher extends the drawer format with added height to accommodate larger dishes and cookware. Designed for true half-load dish care, it supports flexible kitchen planning and bench-height installation, while advanced wash technology and intuitive controls help support improved energy and water efficiency.

PRODUCTS

Series 9 Integrated Single DishDrawer™ Dishwasher*
DD60S4I2
DD60S4HI2 (water softener model)

Series 9 Integrated Tall Single DishDrawer™ Dishwasher*
DD60ST4I2
DD60ST4HI2 (water softener model)

*Not available in all markets

SERIES & STYLE

Series 9
Shown with Minimal handle. Accessory options include Minimal handles in Grey or Black and Contemporary handles in Black or Silver.


FEATURES


1. New door installation adjustment system allows fast and accurate door alignment to the surrounding cabinetry.
2. Single drawer designed for true half-load dish care
3. Panel-ready design supports seamless integration within custom cabinetry
4. Capacitive touch controls make everyday operation simple and intuitive
5. Tall: Extra height fits larger dishes and cookware, including full-size dinner plates up to 310mm.
   Standard: Standard-height drawer fits full-size dinner plates and everyday cookware
6. Designed to suit everyday dish loads without needing to fill a full dishwasher
7. Designed for bench-height installation to support ergonomic access
8. Advanced wash technology supports improved energy and water efficiency
10. Versatile wash cycles and modifiers support varied dish care needs
11. Fan-assisted drying helps leave dishes ready to use
12. Can be paired with other DishDrawer™ models or installed on its own


The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com


DATA SHEETS

© FISHER & PAYKEL APPLIANCES LIMITED 2026

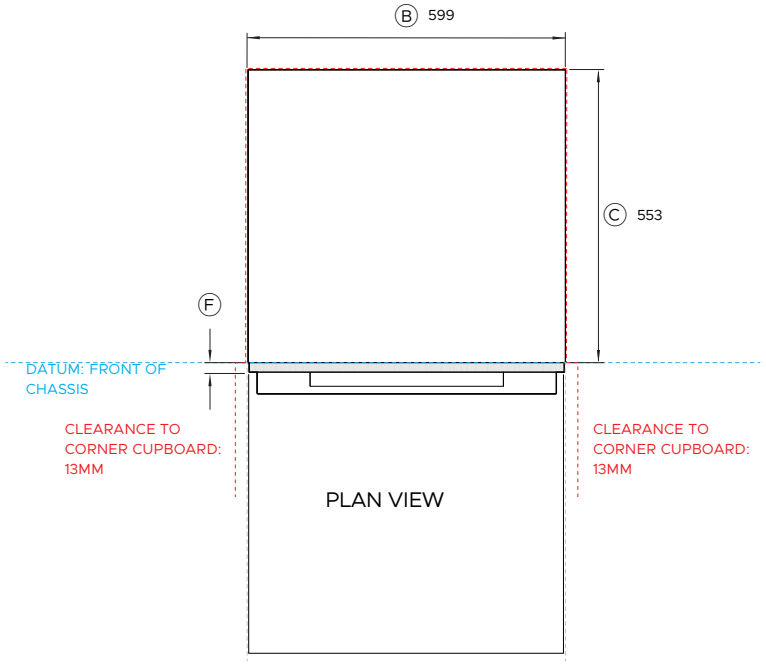

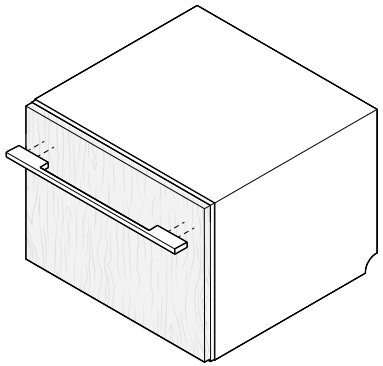

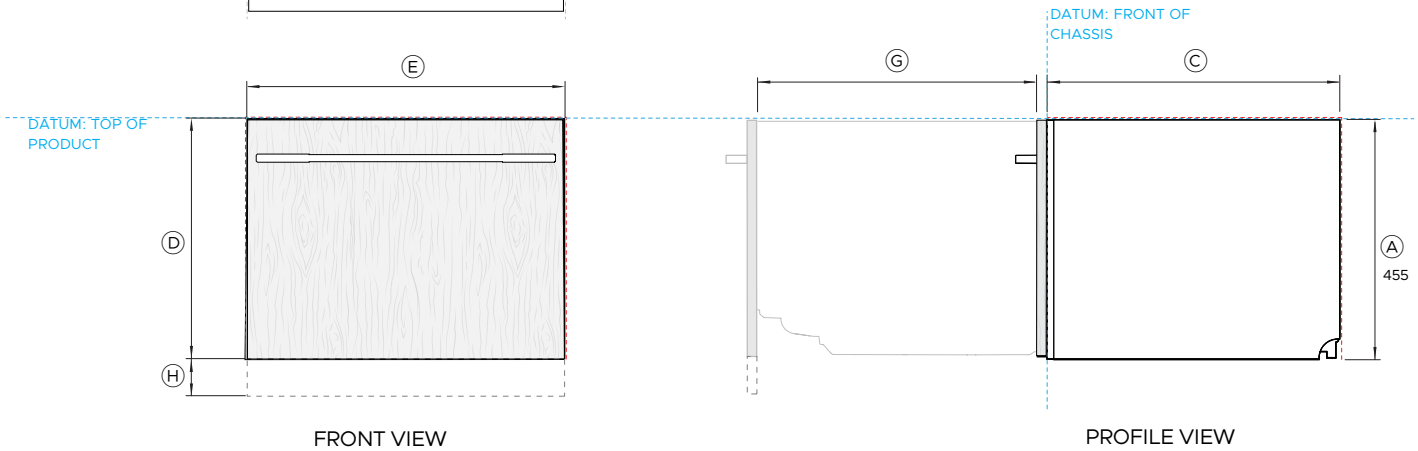



Model no:

DD60ST4I2	Series 9, Integrated Tall Single Dishwasher
DD60ST4HI2	Series 9, Integrated Tall Single Dishwasher with water softener

Shown with custom panel and Minimal Grey Handle (AHM1DDDW60G)

Product Dimensions	**mm**
Ⓐ Overall height of chassis	455
Ⓑ Overall width of chassis	599
Ⓒ Overall depth of chassis*	553
Ⓓ Minimum height of drawer panel	452
Ⓔ Minimum width of drawer panel	596
Ⓕ Drawer panel thickness	16-25
Ⓖ Maximum drawer opening	527
Ⓗ Maximum lower extension of drawer	50
Minimum cabinet toe kick height***	100
Minimum cabinet kick depth***	60

Minimum Clearances	**mm**
Minimum inside height of cavity	457
Minimum inside width of cavity	600
Minimum overall depth of cavity**	580
Minimum clearance to corner cupboard	13
Minimum clearance to adjacent cupboard door	2


Packaged specifications	
Weight	33 kg
Packaged Weight	40 kg
Packaged dimensions	520mm x 700mm x 720mm


*Excluding drawer panels.
**Assumes 19mm drawer panels.
***A minimum toe kick height of 100mm and depth of 60mm is required if venting through toe kick.


- - - - - - INDICATES CABINETRY / PRODUCT DATUM
- - - - - - INDICATES CABINETRY CLEARANCES
- - - - - - INDICATES CUTOUT


IMPORTANT NOTE: Throughout this guide, dimensions may vary by +/-2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

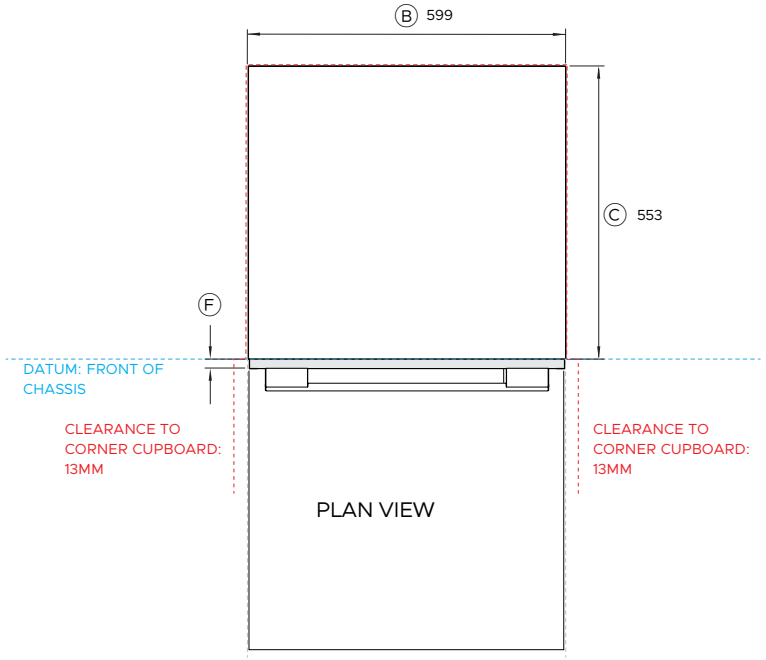

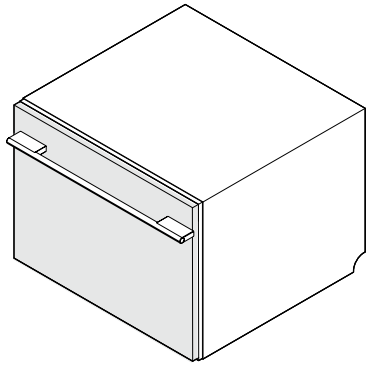

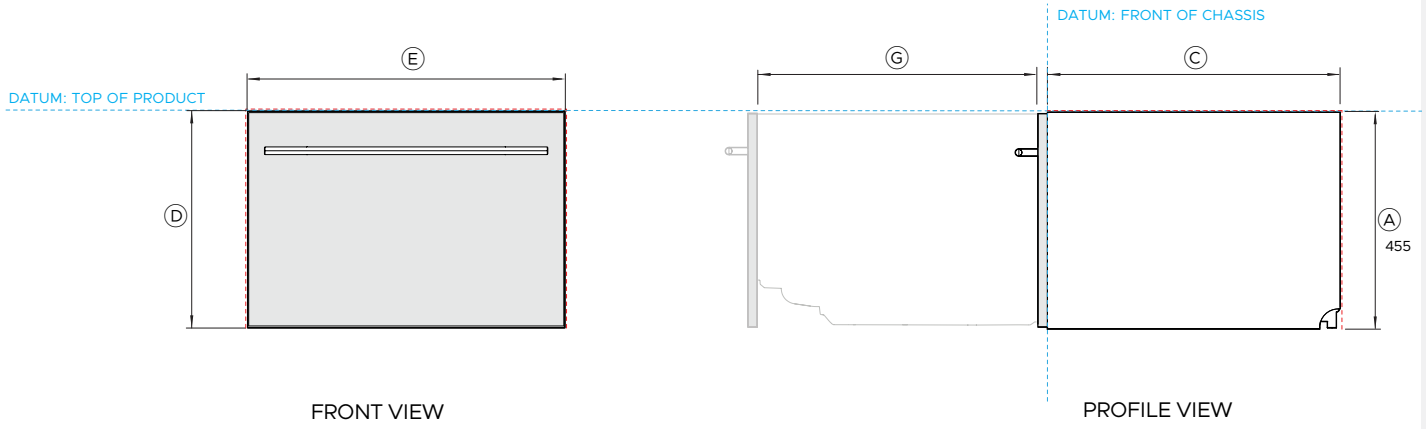



Model no:

DD60ST4I2	Series 9, Integrated Tall Single Dishwasher
DD60ST4HI2	Series 9, Integrated Tall Single Dishwasher with water softener

Shown with Stainless Steel panel (ADDD60STPX) and Contemporary Brushed Aluminium Handle (AHD7DDDW60S).

Product Dimensions	**mm**
Ⓐ Overall height of chassis	455
Ⓑ Overall width of chassis	599
Ⓒ Overall depth of chassis*	553
Ⓓ Height of drawer panel	447
Ⓔ Width of drawer panel	595
Ⓕ Drawer panel thickness	18
Ⓖ Maximum drawer opening	527
Minimum cabinet toe kick height**	100
Minimum cabinet toe kick depth**	60

Minimum Clearances	**mm**
Minimum inside height of cavity	457
Minimum inside width of cavity	600
Minimum overall depth of cavity	580
Minimum clearance to corner cupboard	13
Minimum clearance to adjacent cupboard door	2


Packaged specifications	
Weight	33 kg
Packaged Weight	40 kg
Packaged dimensions	520mm x 700mm x 720mm


*Excluding drawer panels.
**A minimum toe kick height of 100mm and depth of 60mm is required if venting through toe kick.


- - - - - - INDICATES CABINETRY / PRODUCT DATUM
- - - - - - INDICATES CABINETRY CLEARANCES
- - - - - - INDICATES CUTOUT


IMPORTANT NOTE: Throughout this guide, dimensions may vary by +/-2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

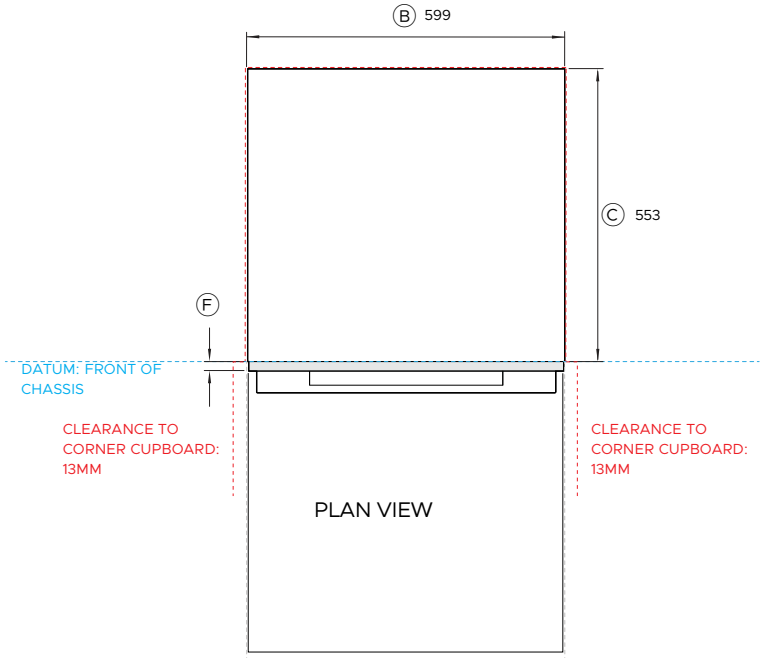

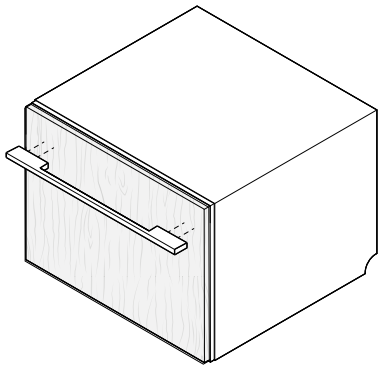

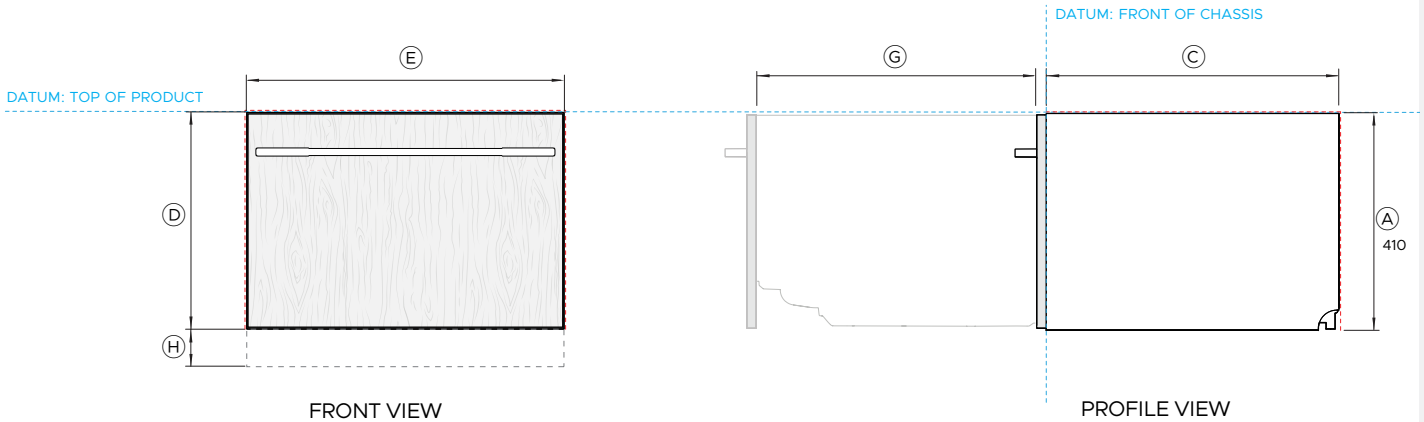



Model no:

DD60S4I2,	Series 9, Integrated Single Dishwasher
DD60S4HI2	Series 9, Integrated Single Dishwasher with water softener

Shown with custom panel and Minimal Grey Handle (AHM1DDDW60G)

Product Dimensions	**mm**
A Overall height of chassis	410
B Overall width of chassis	599
C Overall depth of chassis*	553
D Minimum height of drawer panel	408
E Minimum width of drawer panel	596
F Drawer panel thickness	16-25
G Maximum drawer opening	527
H Maximum lower extension of drawer	50
Minimum cabinet toe kick height***	100
Minimum cabinet toe kick depth***	60

Minimum Clearances	**mm**
Minimum inside height of cavity	412
Minimum inside width of cavity	600
Minimum overall depth of cavity**	580
Minimum clearance to corner cupboard	13
Minimum clearance to adjacent cupboard door	2


Packaged specifications	
Weight	33 kg
Packaged Weight	40 kg
Packaged dimensions	520mm x 700mm x 720mm


*Excluding drawer panels.
**Assumes 19mm drawer panels.
***A minimum toe kick height of 100mm and depth of 60mm is required if venting through toe kick.


- - - - - - INDICATES CABINETRY / PRODUCT DATUM
- - - - - - INDICATES CABINETRY CLEARANCES
- - - - - - INDICATES CUTOUT


IMPORTANT NOTE: Throughout this guide, dimensions may vary by +/-2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

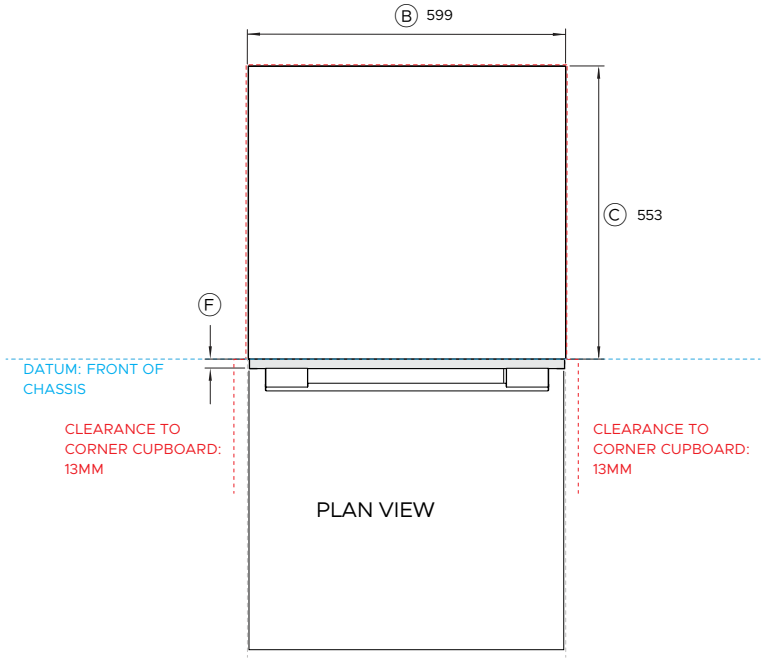

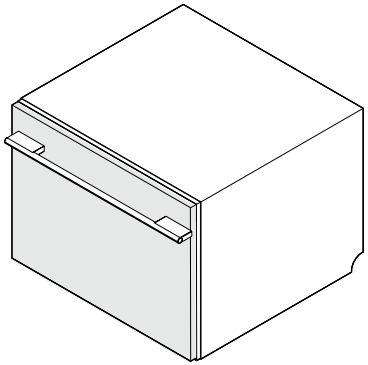

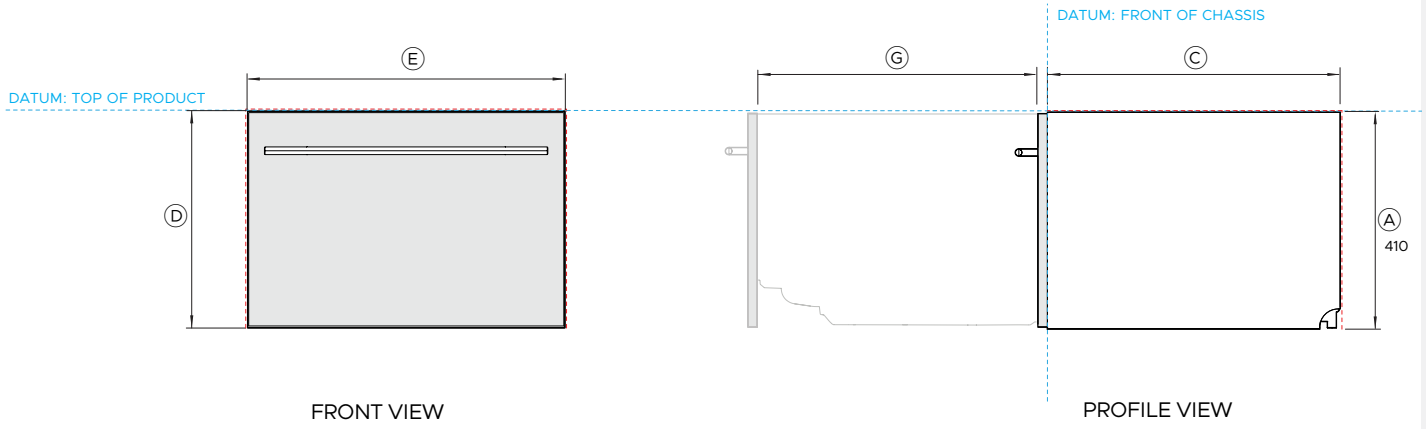



Model no:

DD60S4I2,	Series 9, Integrated Single Dishwasher
DD60S4HI2	Series 9, Integrated Single Dishwasher with water softener

Shown with Stainless Steel panel (ADDD60SPX) and Contemporary Brushed Aluminium Handle (AHD7DDDW60S).

Product Dimensions	**mm**
(A) Overall height of chassis	410
(B) Overall width of chassis	599
(C) Overall depth of chassis*	553
(D) Height of drawer panel	403
(E) Width of drawer panel	595
(F) Drawer panel thickness	18
(G) Maximum drawer opening	527
Minimum cabinet toe kick height**	100
Minimum cabinet toe kick depth**	60

Minimum Clearances	**mm**
Minimum inside height of cavity	412
Minimum inside width of cavity	600
Minimum overall depth of cavity	580
Minimum clearance to corner cupboard	13
Minimum clearance to adjacent cupboard door	2

Packaged specifications	
Weight	33 kg
Packaged Weight	40 kg
Packaged dimensions	520mm x 700mm x 720mm

*Excluding drawer panels.
**A minimum toe kick height of 100mm and depth of 60mm is required if venting through toe kick.


- - - - - - INDICATES CABINETRY / PRODUCT DATUM
- - - - - - INDICATES CABINETRY CLEARANCES
- - - - - - INDICATES CUTOUT

IMPORTANT NOTE: Throughout this guide, dimensions may vary by +/-2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

ACCESSORIES

© FISHER & PAYKEL APPLIANCES LIMITED 2026

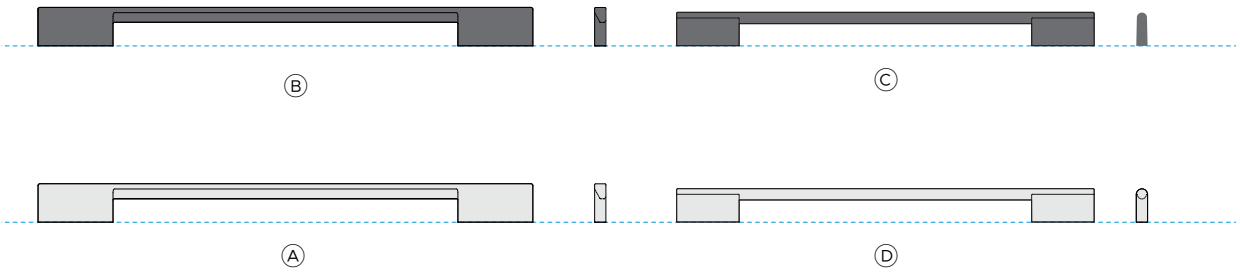


HANDLE SPECIFICATIONS

For full handle options and specifications the handle planning guide can be found in the resources tab of the handle product pages.

HANDLES

Style	Model	Finish	Length	Height	Thickness
Ⓐ Minimal Grey	AHM1DDDW60G	Grey	528mm	41mm	12mm
Ⓑ Minimal Black	AHM1DDDW60B	Black	528mm	41mm	12mm
Ⓒ Contemporary Black	AHD7DDDW60B	Brushed Black	535mm	43mm	14.5mm
Ⓓ Contemporary Silver	AHD7DDDW60S	Brushed Silver	535mm	43mm	14.5mm

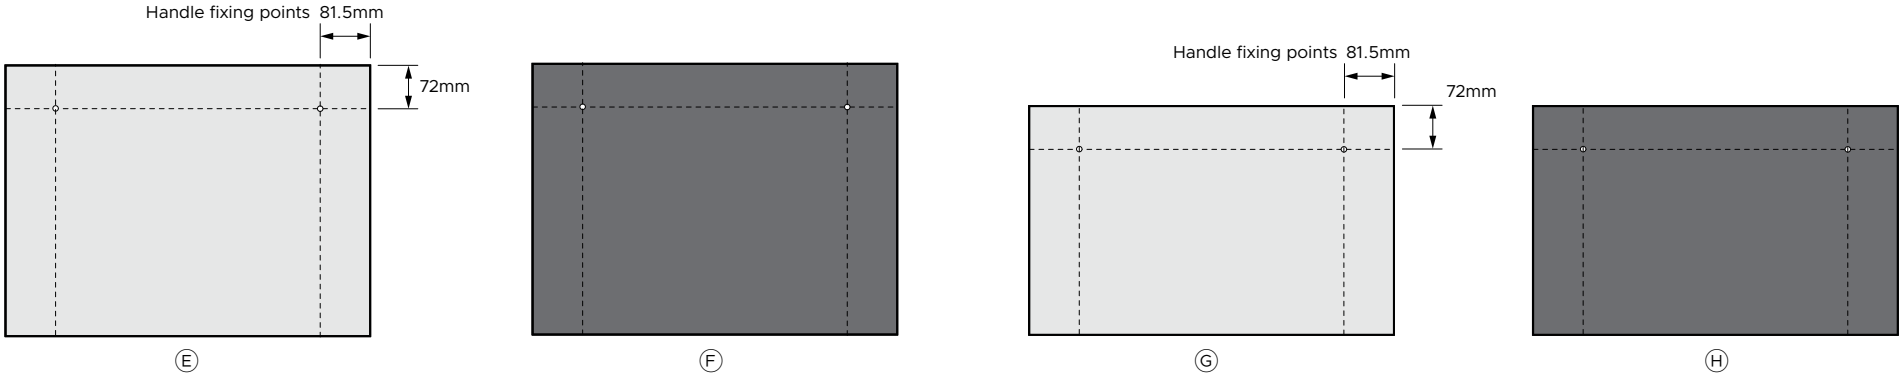

PANELS


Style	Model	Finish	Length	Height	Thickness
Ⓔ Tall brushed stainless steel - DD60ST4I2, DD60ST4HI2	ADDD60STPX	Brushed stainless steel	595mm	447mm	18mm
Ⓕ Tall brushed black stainless steel - DD60ST4I2, DD60ST4HI2	ADDD60STPB	Brushed black stainless steel	595mm	447mm	18mm
Ⓖ Brushed stainless steel - DD60S4I2, DD60S4HI2	ADDD60SPX	Brushed stainless steel	595mm	403mm	18mm
Ⓗ Brushed black stainless steel - DD60S4I2, DD60S4HI2	ADDD60SPB	Brushed black stainless steel	595mm	403mm	18mm

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

PLANNING CONSIDERATIONS

© FISHER & PAYKEL APPLIANCES LIMITED 2026


CAVITY DIMENSIONS DD60ST4I2, DD60ST4HI2

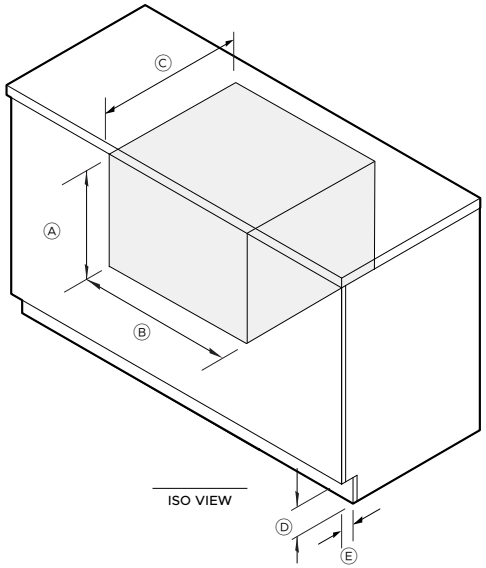

		mm
A	Overall height	min 457
B	Overall width	600 - 610
C	Overall depth	min 580
D	Minimum toe kick height*	min 100
E	Minimum toe kick depth*	min 60

*A minimum toe kick height of 100mm and depth of 60mm is required if venting through toe kick.

CAVITY DIMENSIONS DD60S4I2, DD60S4HI2

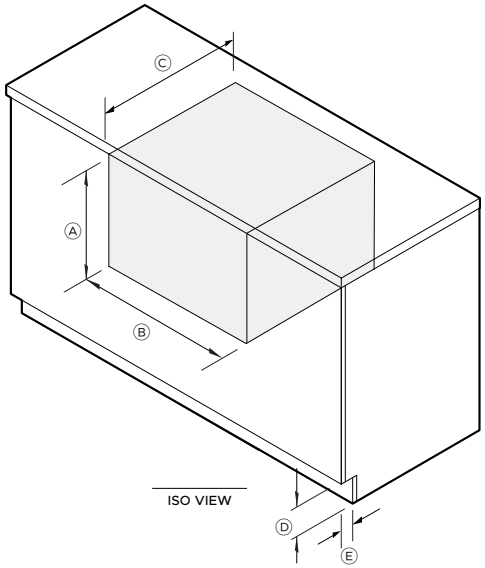


		mm
A	Overall height	min 412
B	Overall width	600 - 610
C	Overall depth	min 580
D	Minimum toe kick height*	min 100
E	Minimum toe kick depth*	min 60

*A minimum toe kick height of 100mm and depth of 60mm is required if venting through toe kick.

CAVITY SPACER PLACEMENT

The dishwasher must be secured through chassis and into the cabinet sides. If the cavity is over width, packers must be installed to avoid bowing the chassis.
Side and top brackets may be installed and fixed to the edge of the cabinet.

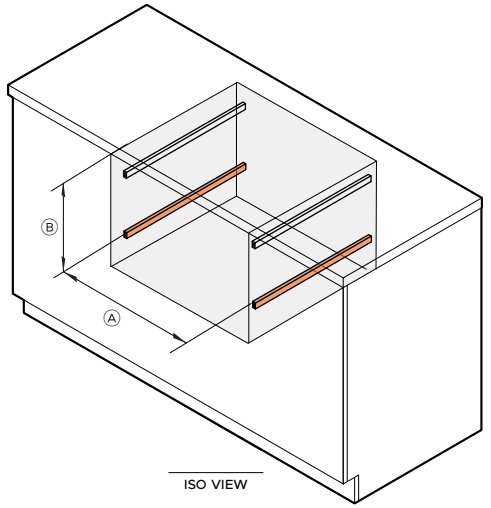

		mm
A	Width between spacers	600
B	Chassis centre of fixing point from top of cavity Tall models DD60ST4I2, DD60ST4HI2 Standard models DD60S4I2, DD60S4HI2	 340 295


The cavity, custom panel and under-countertop base materials and surfaces must be moisture resistant. Otherwise, seal or paint them with a moisture resistant coating system.

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com


CUSTOM PANEL ADJUSTMENT

Once the custom panel is attached, adjustments can be made with a Phillips screwdriver. They can also be made at any time after installation, without removing the panel or the product.

Horizontal and vertical adjustments allow for refined, even gaps to the surrounding cabinetry.
Tilt adjustment aligns the panel with surrounding cabinetry.

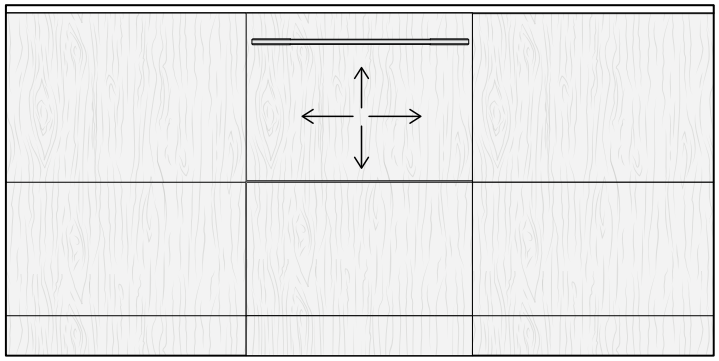

FRONT VIEW - HORIZONTAL AND VERTICAL ADJUSTMENT

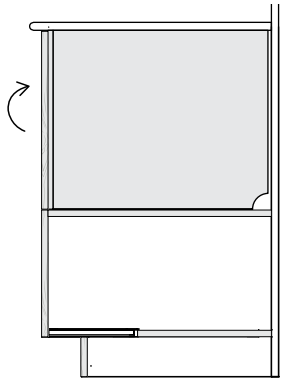

SECTION VIEW - TILT ADJUSTMENT


EXTENDING CUSTOM PANELS

Custom panels may need to extend to cover cabinet side walls or frames, or to create recessed handles.


Make sure the dishwasher drawer can always close securely against the seals on the chassis.
The dishwasher drawers must seal properly when closed to prevent humidity escape and condensation, which can damage the custom panel.
If the custom drawer panel contacts any cabinetry, the seal may be compromised, allowing humidity to escape and damage the drawer panels or cabinetry.

ASSISTED OPENING ACCESSORY


The accessory is located underneath the dishwasher, installing above the dishwasher is not recommended.
The assisted opening accessory can only be used with integrated panels that can be extended at the bottom to cover it. For details, please see the Assisted Opening Accessory planning guide at fisherpaykel.com

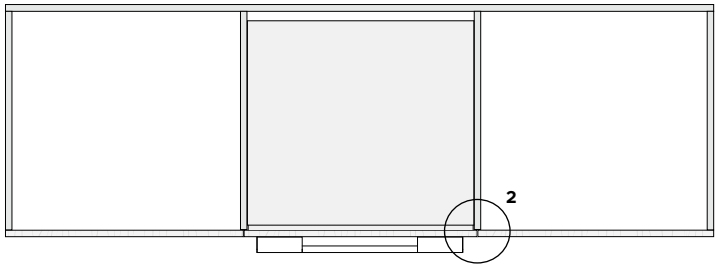


PLAN VIEW

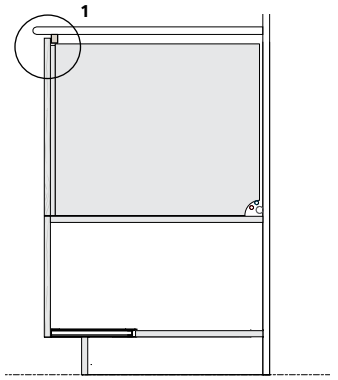

SECTION VIEW

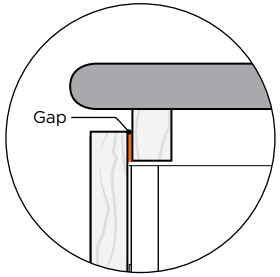

DETAIL 1



DETAIL 2

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

© FISHER & PAYKEL APPLIANCES LIMITED 2026


SIDE BY SIDE

The chassis is screwed to the cabinet side and requires a dividing panel between the dishwashers. Shorter screws may be required.


Dimensions		mm
Ⓐ	Cavity width	600
Ⓑ	Minimum custom panel width*	596
Ⓒ	Pre-finished panel width	595

*Panel width depends on your cabinetry style, which may be overlay, framed, or standard.


Ensure that there is a small gap between the custom panel and any cabinetry behind it to allow a good seal.

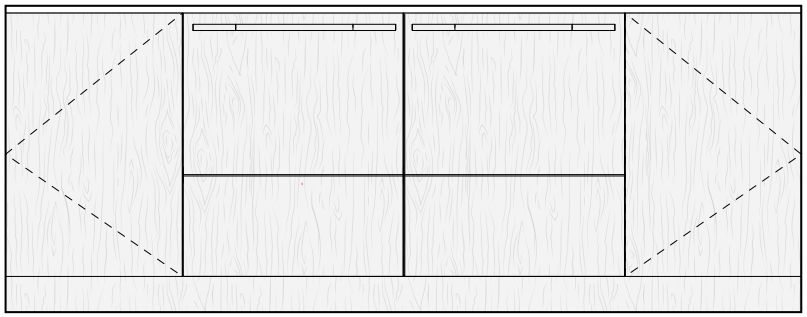


FRONT VIEW
SIDE BY SIDE INSTALLATION

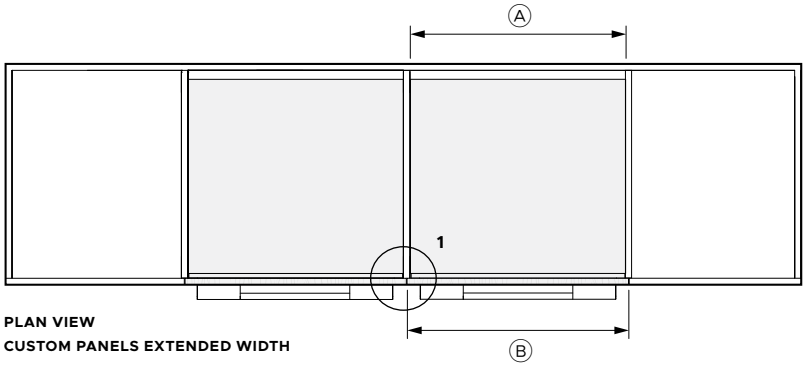


PLAN VIEW
CUSTOM PANELS EXTENDED WIDTH



DETAIL 1
PANEL EXTENDED TO CENTRE OF CABINET DIVIDER

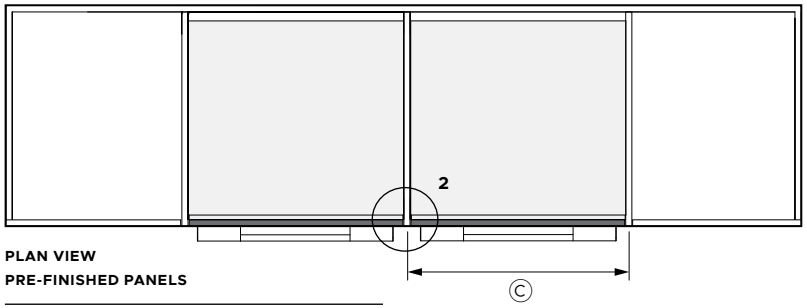

PLAN VIEW
PRE-FINISHED PANELS



DETAIL 2
SIDE BY SIDE INSTALL WITH PRE-FINISHED PANELS

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com


SIDE BY SIDE

For detailed Cooldrawer™ information refer to the Cooldrawer™ Planning Guide at fisherpaykel.com
Classic handle kit shown for Cooldrawer™ (AHCLRD36S) and dishwasher (AHCL-DDDW-60X).

Other available handles:
Square fine aluminium
Cooldrawer AHD5RD36S and
Dishwasher AHD5-OBDD-60SX
Square fine black
Cooldrawer AHD5RD36SB
Dishwasher AHD5-OBDD-60SB


Cooldrawer™ Dimensions	**mm**
Ⓐ Cooldrawer™ minimum cavity height	665 - 764
Ⓑ Cooldrawer™ cavity width	864
Ⓒ Cooldrawer™ minimum panel height	476
Ⓓ Cooldrawer™ minimum panel width	896
Ⓔ Cooldrawer™ false panel height	150 - 180

Note: Custom door panel and toe kicks to be manufactured and fitted by cabinetmaker.

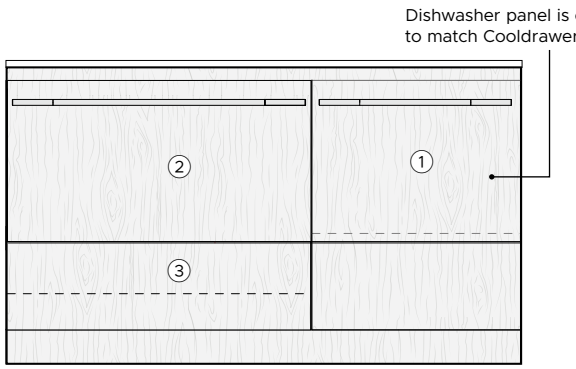


FRONT VIEW
COOLDRAWER™ AND DISHWASHER - CUSTOM PANELS


① Dishwasher ② Cooldrawer™ ③ Cooldrawer™ false panel




SECTION THROUGH COOLDRAWER™



SECTION THROUGH DISHWASHER

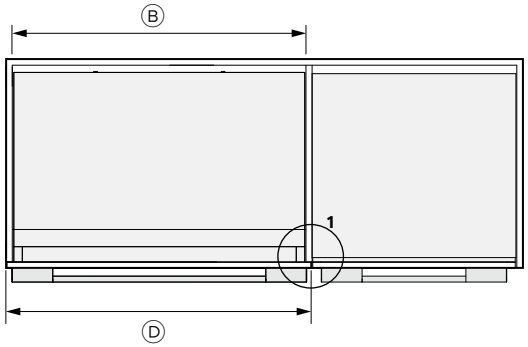

PLAN VIEW
COOLDRAWER™ AND DISHWASHER - CUSTOM PANELS



DETAIL 1
SIDE BY SIDE INSTALL WITH
MINIMUM PANEL WIDTHS

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

CUSTOM DRAWER PANEL PREPARATION

© FISHER & PAYKEL APPLIANCES LIMITED 2026

CUSTOM PANEL SPECIFICATIONS


Panel width will vary according to your cabinet specifications.

Custom drawer panel and toe kicks should be manufactured and fitted by a cabinetmaker.

Panel Dimensions		mm
Ⓐ	Minimum panel width	596
Ⓑ	Minimum panel height	452
Ⓒ	Maximum panel extension	50
Ⓓ	*Panels may be extended provided the total weight does not exceed 9kg. Extension over 50mm may make the controls less comfortable to use	*
Maximum panel weight of drawer panel including handle		9kg

CUSTOM PANEL THICKNESS

16mm Screws are supplied for installing the custom panel. Where the panel is thinner than 18mm at any point, use shorter fixing screws to ensure they do not break through the face of the panel.

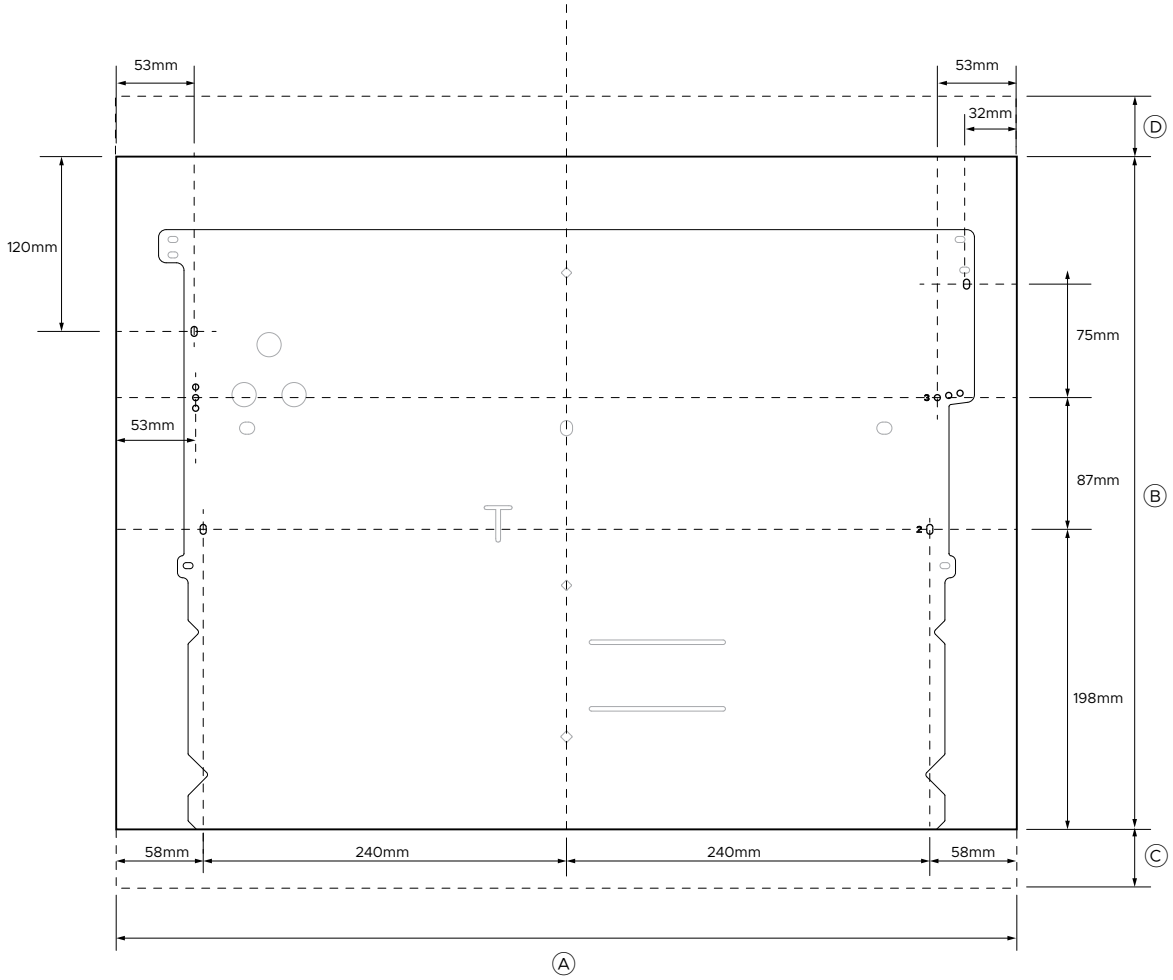

PANEL - BACK VIEW

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

CUSTOM PANEL SPECIFICATIONS


Panel width will vary according to your cabinet specifications.

Custom drawer panel and toe kicks should be manufactured and fitted by a cabinetmaker.

Panel Dimensions		**mm**
Ⓐ	Minimum panel width	596
Ⓑ	Minimum panel height	408
Ⓒ	Maximum panel extension	50
Ⓓ	*Panels may be extended provided the total weight does not exceed 9kg. Extension over 50mm may make the controls less comfortable to use	*
Maximum panel weight of drawer panel including handle		9kg

CUSTOM PANEL THICKNESS

16mm Screws are supplied for installing the custom panel. Where the panel is thinner than 18mm at any point, use shorter fixing screws to ensure they do not break through the face of the panel.

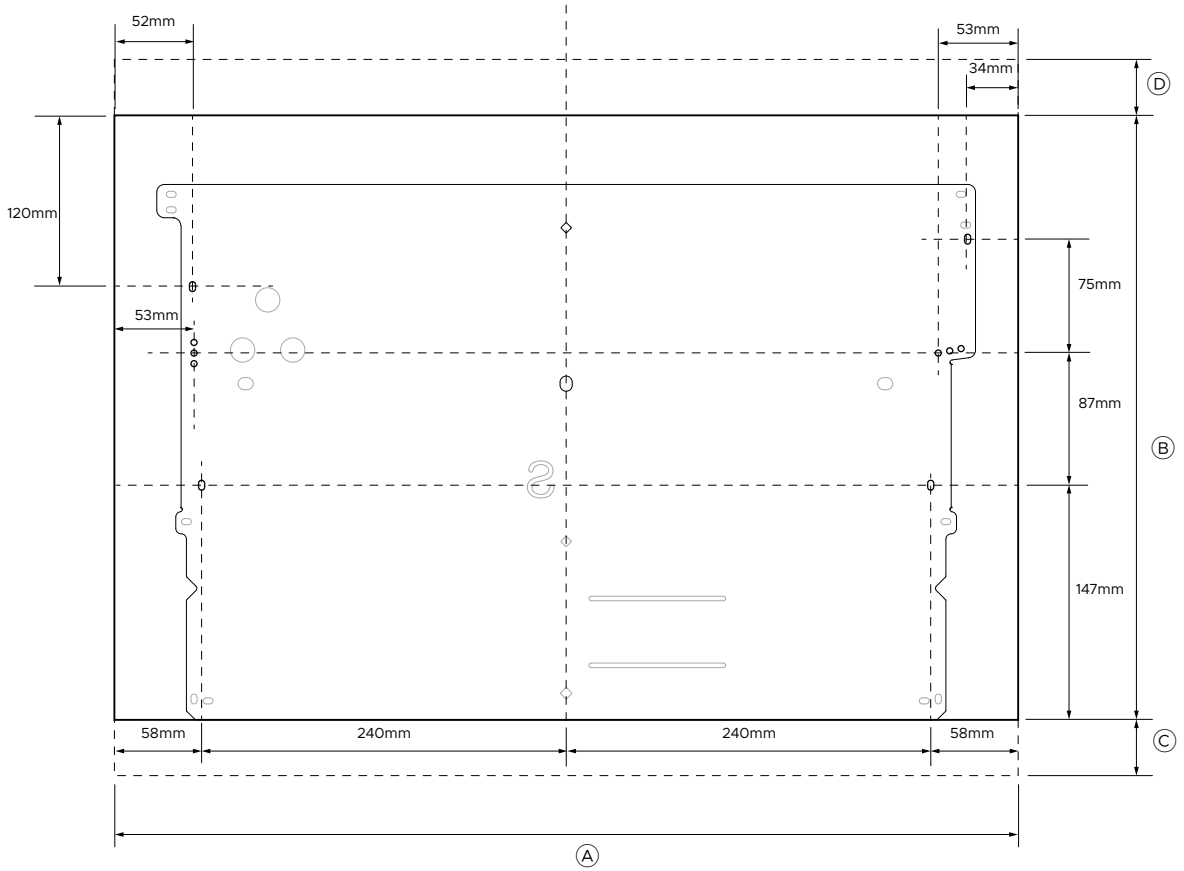


PANEL - BACK VIEW


The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

VENTING SPECIFICATIONS


© FISHER & PAYKEL APPLIANCES LIMITED 2026

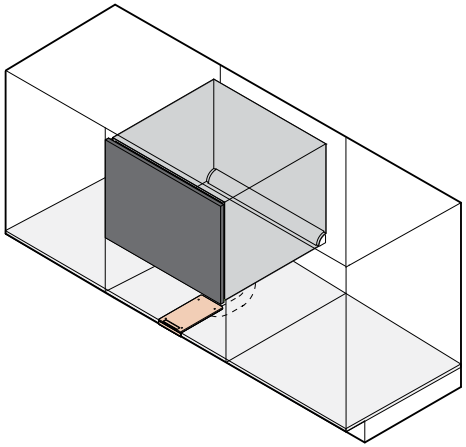


ISOMETRIC VIEW - VENT UNDER DISHWASHER

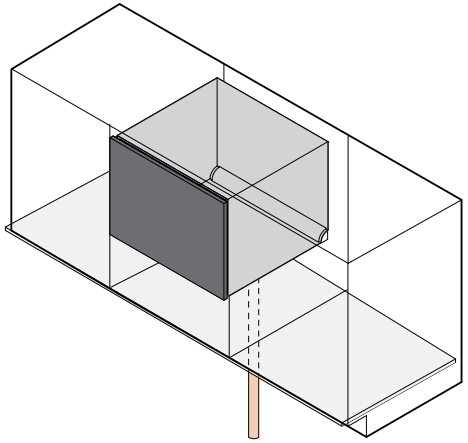

ISOMETRIC VIEW - VENTING UNDER FLOOR

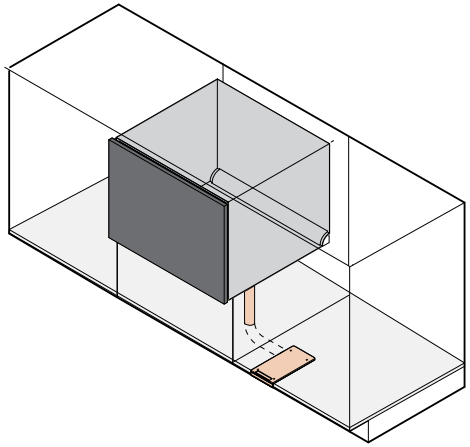

ISOMETRIC VIEW - VENTING TOE KICK TO ADJACENT CABINET

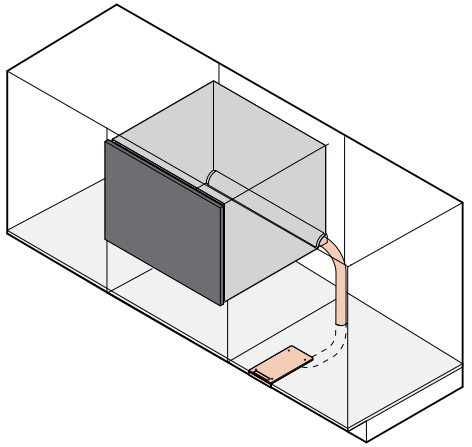

ISOMETRIC VIEW - VENTING SIDE TO ADJACENT CABINET

VENT UNDER DISHWASHER

Route the vent hose below the dishwasher cavity. The duct can be installed under a drawer, provided there is a 60mm gap behind the drawer.

VENT HOSE UNDER FLOOR

The vent hose can be installed below the dishwasher cavity and through the floor into an open and ventilated area. The duct will not be required.

VENTING TO ADJACENT CABINET


Route the vent hose under the dishwasher and into the toe kick space. The hose can then be routed through the toe kick space and into the adjacent left or right toe kick.

VENTING TO ADJACENT CABINET


Route the vent hose through the side wall and into the toe kick space. To avoid constricting the vent hose, place the water inlet, drainage hose, and power in a separate cabinet space.

Duct Dimensions		mm
Ⓐ	Duct cut out width	100
Ⓑ	Duct cut out length	220
Ⓒ	Optimal distance to frame (inside shelf)	25
	Minimum toe kick height	100
	Minimum toe kick depth	60

Maximum vent hose length: 1.6m. Do not shorten the hose. Avoid sharp bends or kinks.

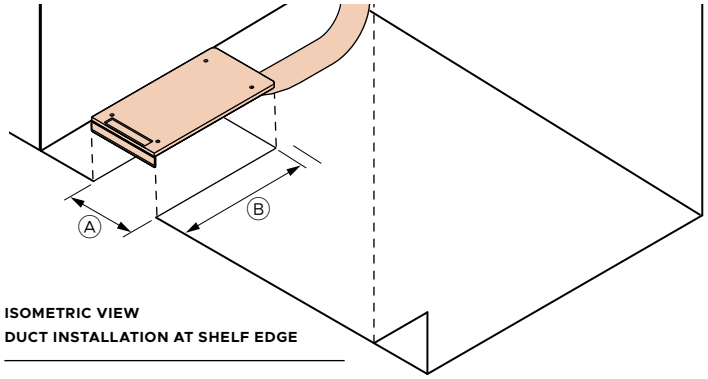

ISOMETRIC VIEW
DUCT INSTALLATION AT SHELF EDGE

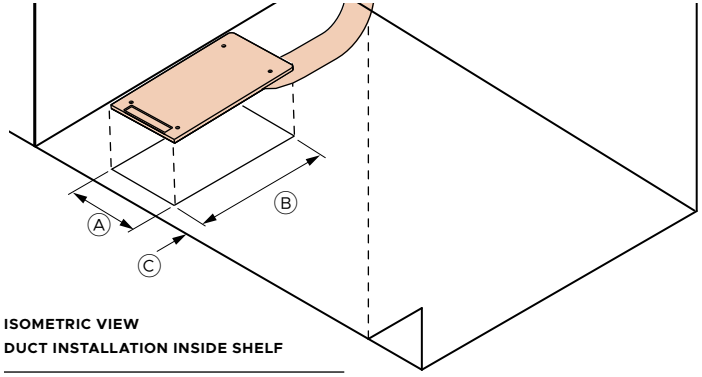


ISOMETRIC VIEW
DUCT INSTALLATION INSIDE SHELF

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

SERVICES

© FISHER & PAYKEL APPLIANCES LIMITED 2026

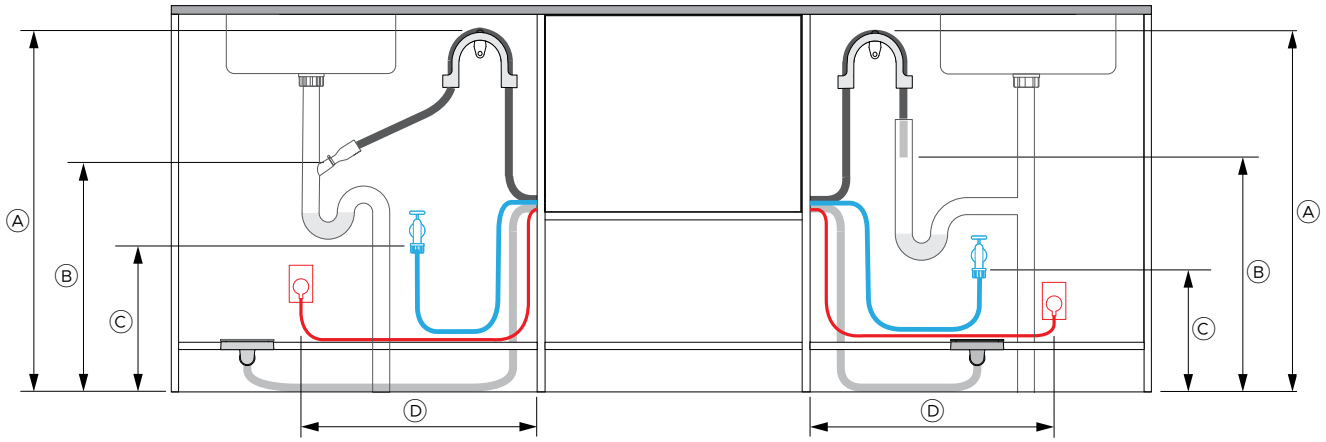

FRONT SECTION VIEW - SPIGOT INSTALL


FRONT SECTION VIEW - STAND PIPE INSTALL

Service dimensions	**mm**
Ⓐ Minimum distance from floor to top of hose support	750
Ⓑ Minimum distance from floor to end of drain hoses*	500
Ⓒ Minimum distance from floor to inlet hose connection	200
Ⓓ Maximum distance from cabinetry to the centre of electrical outlet	450


*Distances are the same for standpipe and waste tee installation.

Service hole dimensions	**mm**
Ⓔ Minimum distance between front of product** and centre of service hole	538
Ⓕ Maximum distance between shelf and centre of service hole	38
Ⓖ Minimum diameter of all service holes	57

**Not including dishwasher panels

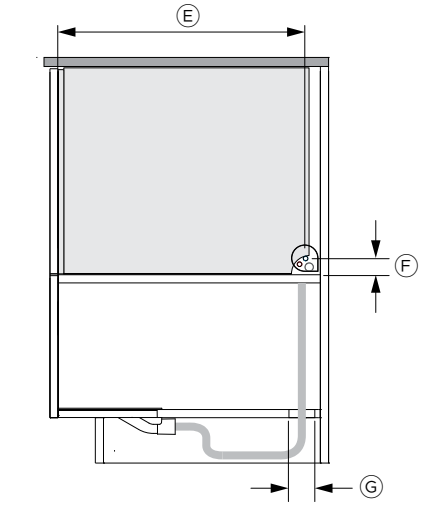


SIDE SECTION VIEW - SERVICE HOLE

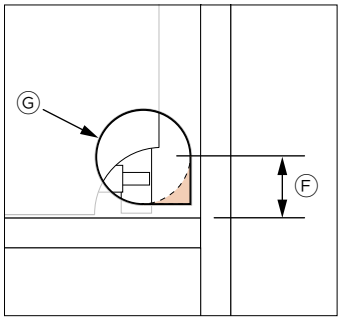


DETAIL 1 - SERVICE HOLE

If the vent hose is routed through the service hole, the corner must be cut out.

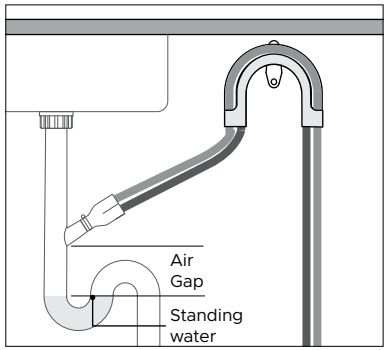

DETAIL VIEW - SPIGOT INSTALL


The spigot must be installed above the standing water with an air gap in between. The high loop must be at least 150mm above the drain hose joiner.

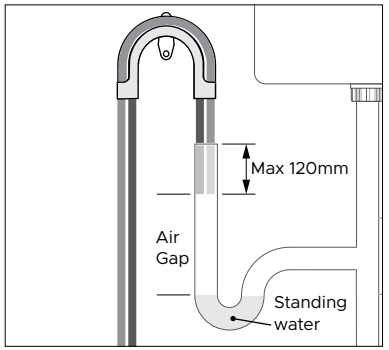

DETAIL VIEW - STAND PIPE INSTALL

The dishwasher drain must be installed no more than 120mm into the stand pipe.
An air gap between drain ends and standing water is required.

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

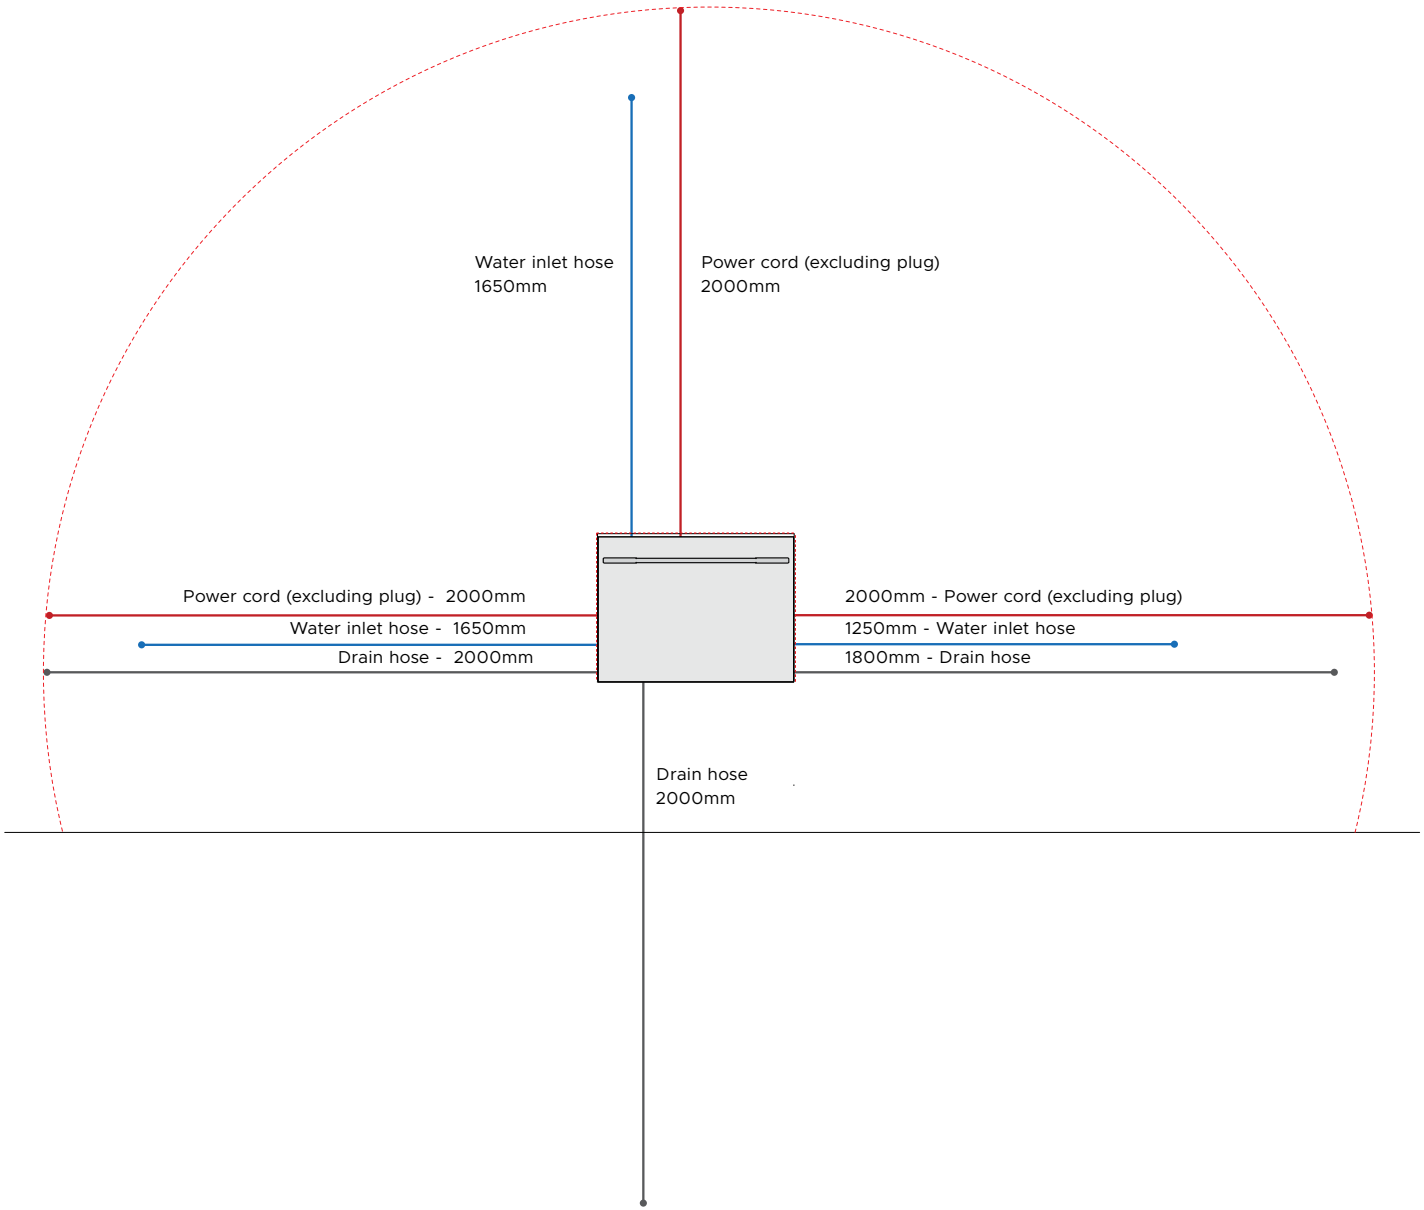

Electrical and plumbing specifications

DD60ST4I2, DD60ST4HI2, DD60S4I2, DD60S4HI2

Electrical	
Voltage (V)	220 – 240V
Service (A)	Min 4.5A
Supply (Hz)	50-60Hz
Rated Power (W)	1200W
Plumbing	
Supply	3/4" (20mm) BSP connector water inlet hose.
Pressure	
Water softener models (DD60ST4HI2, DD60S4HI2)	Min. 0.1 MPa (14.5 psi)
	Max. 1 MPa (145 psi)
Non water softener model (DD60ST4I2, DD60S4I2)	Min. 0.03 MPa (4.3 psi)
	Max. 1 MPa (145 psi)
Recommended temperature	Cold water connection @ 20°C

Hose and cord lengths	**mm**
Drain hoses*	2000
Water inlet	1650
Power	2000

*The Fisher & Paykel 3.6m drain hose extension kit (part number 525798) is available for purchase from fisherpaykel.com

The power plug must remain accessible after installation for maintenance.

- - - - - - INDICATES CABINETRY / PRODUCT DATUM
- - - - - - INDICATES CABINETRY CLEARANCES
- - - - - - INDICATES CUTOUT

IMPORTANT NOTE: Throughout this guide, dimensions may vary by +/-2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

© FISHER & PAYKEL APPLIANCES LIMITED 2026