FABRIC CARE SOLUTION

PLANNING GUIDE

WH1160H1 | WH1160HG1 | DH9060H1 | DH9060HG1 | DH9060HL1 | DH9060HLG1 | FC1260H1 | FC1260HG1

FM2060SG1 | FM2060SG1

FISHER & PAYKEL

This comprehensive Planning Guide provides you with the framework and tools to achieve your desired design outcome with Fisher & Paykel appliances. In this guide, you will find a range of conceptual, detailed, and dimensional product information to bring your ideas to life and create spaces that truly reflect your vision.

CONTENTS

CONCEPT DESIGN ⓘ	PAGE
Design Choices	
Product Overview	4
Multiple Configurations Options	5
Specification Guide	
Fabric Care Solutions	7

DEVELOPED AND DETAILED DESIGN ⓘ	PAGE
Data Sheets	
Washing Machine - Display	14
Heat Pump Dryer - Display-free	15
Fabric Care Cabinet	17
Storage Plinth	18
Gap Considerations	19
Flush & Proud Installation	21
Multiple Installation	
Stacked	26
Stacked with Plinth	27
Side by Side with Fabric Care Cabinet	28
Side by Side with Plinth and Fabric Care Cabinet	29
Stacked with Plinth and Fabric Care Cabinet	30
Stacked with Plinth and 2x Fabric Care Cabinet	31
Door Opening & Door Swing	32

DEVELOPED AND DETAILED DESIGN	PAGE
Services	
Washing Machine	36
Heat Pump Dryer	37
Fabric Care Cabinet	38
Side By Side Plumbing	39
Side By Side Electrical and Communication	40
Stacked Plumbing	41
Stacked Electrical and Communication	42

 © FISHER & PAYKEL LIMITED 2026

DESIGN CHOICES

© FISHER & PAYKEL LIMITED 2026

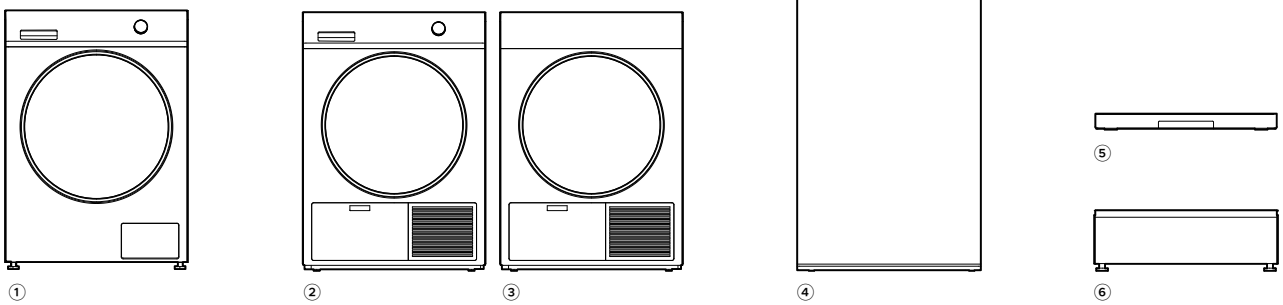

PRODUCT OVERVIEW

① **WH1160HG1 (Graphite), WH1160H1 (White)**
Front Loader Washing Machine, 11kg, ActiveIntelligence™, Steam Care

② **DH9060HG1 (Graphite), DH9060H1 (White)**
With Display
Heat Pump Dryer, 9kg, Steam Care, Reversible Door

③ **DH9060HLG1 (Graphite), DH9060HL1 (White)**
Display-free*
Heat Pump Dryer, 9kg, Steam Care, Reversible Door

*Heat pump dryer controlled through washer interface

④ **FC1260HG1 (Graphite), FC1260H1 (White)**
Fabric Care Cabinet

⑤ **99373 (Graphite), 428159 (White)**
Stacking Kit

⑥ **FM2060SG1 (Graphite), FM2060S1 (White)**
Storage Plinth

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown.Do not use this Planning Guide as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website fisherpaykel.com

Multiple Configuration Options

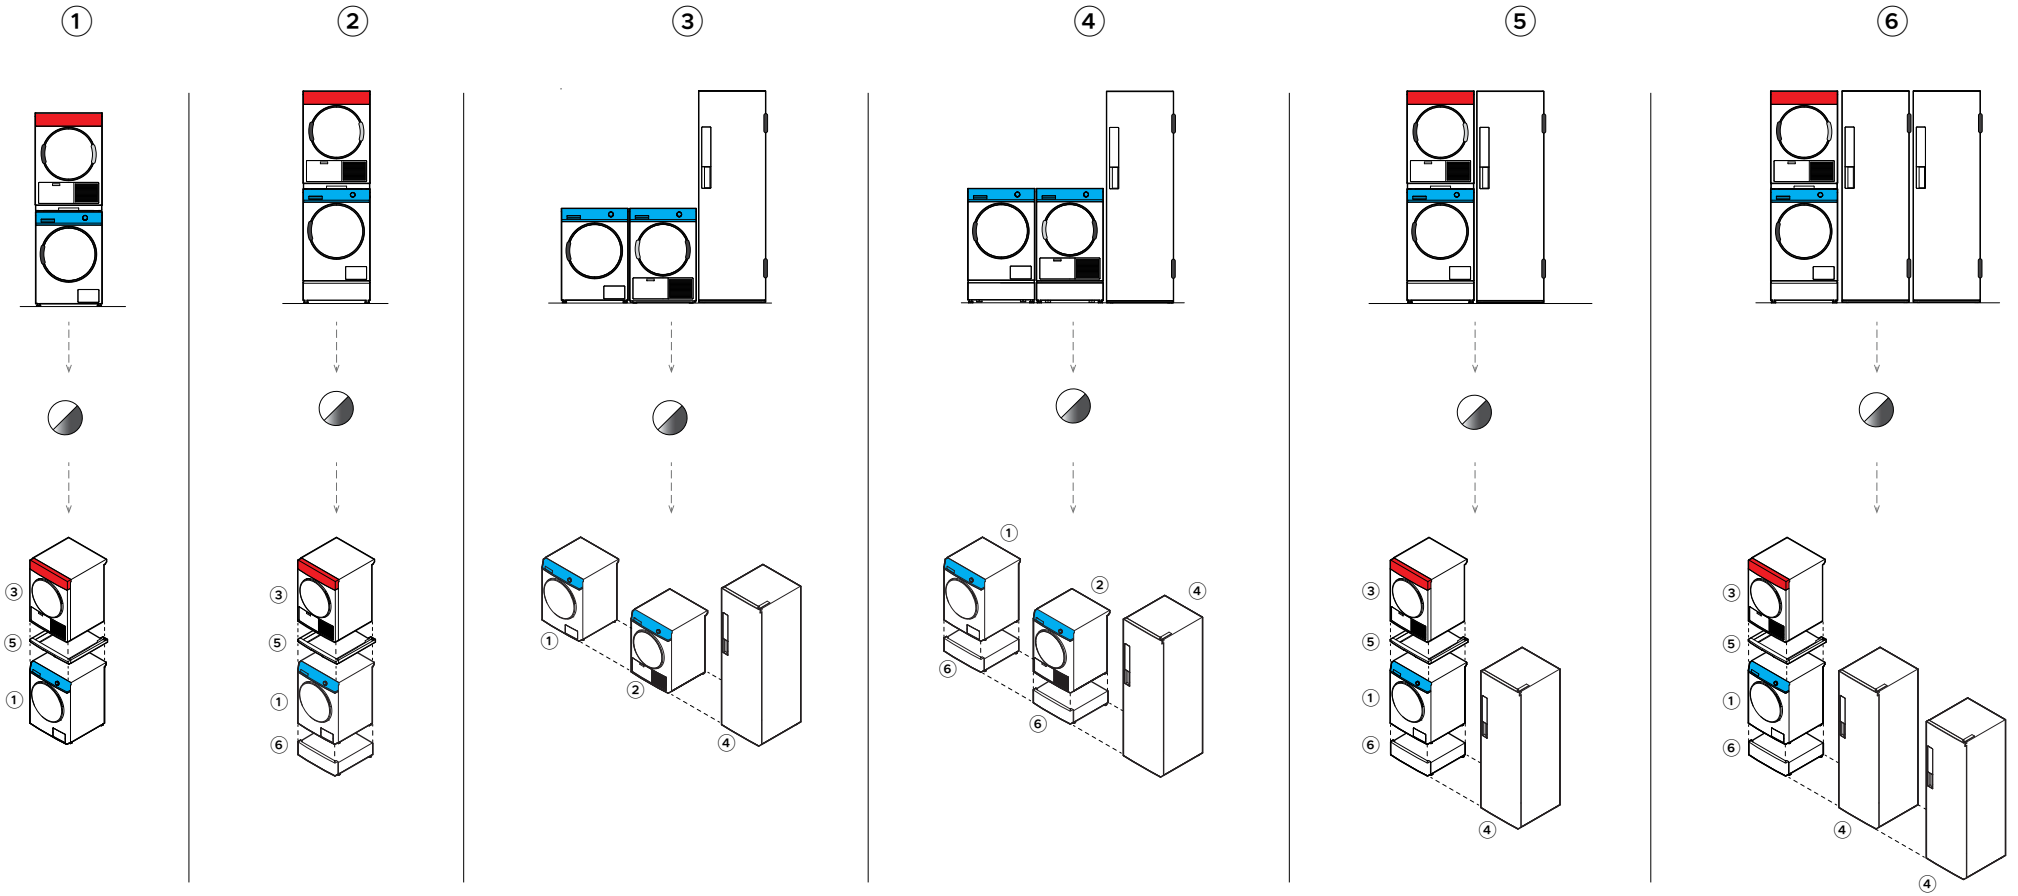

MODELS	HINGE	GRAPHITE	WHITE
① Front Load Washing Machine	Left Hinge	WH1160HG1	WH1160H1
② Heat Pump Dryer - With Display	Left/Right Hinge	DH9060HG1	DH9060H1
③ Heat Pump Dryer - Display-free	Left/Right Hinge	DH9060HLG1	DH9060HL1
④ Fabric Care Cabinet	Right Hinge	FC1260HG1	FC1260H1
⑤ Stacking Kit		99373	428159
⑥ Storage Plinth		FM2060SG1	FM2060S1

 © FISHER & PAYKEL LIMITED 2026

SPECIFICATION GUIDE

 © FISHER & PAYKEL LIMITED 2026

OVERVIEW

Care for every corner of the wardrobe with an ecosystem of fabric care products that combine diverse functions to deliver exceptional results. From precision sensing to autonomous technologies, the fabric care suite removes the guesswork, delivering the perfect balance across each product to ensure optimal care for every garment.

PRODUCTS

FC1260HG1 (Graphite), FC1260H1 (White)
Fabric Care Cabinet

WH1160HG1 (Graphite), WH1160H1 (White)
Front Loader Washing Machine, 11kg, ActiveIntelligence™, Steam Care

DH9060HG1 (Graphite), DH9060H1 (White) with display, Heat Pump Dryer, 9kg, Steam Care, Reversible Door
DH9060HLG1 (Graphite), DH9060HL1 (White) Display-free, Heat Pump Dryer, 9kg, Steam Care, Reversible Door

FEATURES

① ith multiple configurations from compact to large, this modular fabric care solution is designed to work for every space of the evolving home.

② rom delicates to durables, and everyday to occasional, there is a specialist cycle that ensures optimal care for every type of garment.

③ eaturing a range of specialised environments and cycles, designed to lengthen the life of a garment and care for them with minimal environmental impact.

④ imeless in design, the fabric care suite is engineered with premium materials and precise manufacturing, enabling long-lasting care for both product and garment.

ACCESSORIES

FM2060SG1 (Graphite), FM2060S1 (White)
Storage Plinth

99373 (Graphite), 428159 (White)
Stacking Kit

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown.Do not use this Planning Guide as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website fisherpaykel.com

OVERVIEW

Enjoy ready–to–wear convenience with the luxury Fabric Care Cabinet, designed to bring tailored care to all corners of the modern wardrobe. Its unique features include gentle refreshing, deodorising, sanitising and drying, making it suitable for delicate fabrics like silk, wool and leather.

PRODUCTS

FC1260HG1 (Graphite)
FC1260H1 (White)
Fabric Care Cabinet

ACCESSORIES

Shoe Rack (included)

Five hangers (included)

FEATURES

① esigned to help change laundry habits with four core functions for refreshing, drying, deodorising or sanitising special items.

② air with our Front Loader Washing Machine and Heat Pump Dryer, for a cohesive fabric care ecosystem.

③ hoose from a sleek Graphite or classic White finish for a clean, considered laundry.

④ onnected Home and Wi-Fi enabled. The cabinet connects with the Fisher & Paykel SmartHQ™ app for seamless control.

⑤ on-plumbed design makes it adaptable to various spaces within the home.

⑥ pecialised care for structured garments, including leather, woollen coats, delicate fabrics and outerwear.

⑦ Help extend the life of delicate silks, woollens and cottons by reducing their frequency of washing.

⑧ pacious capacity with multiple loading configurations, and four adjustable folding racks.

⑨ edicated shoe care cycle, coupled with a shoe rack, provides a convenient and hygienic way to care for footwear.

⑩ Designed to minimise energy and water usage by reducing the reliance on traditional washing methods.

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown.Do not use this Planning Guide as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website fisherpaykel.com

SPECIFICATIONS

Model No.	WH1160H1, WH1160HG1
Dimensions	H 850mm W 600mm D 665mm
Weight	82kg
Electrical	
Supply	220 – 240V, 50Hz
Service	10 Amps
Outlet	3-prong grounding-type
Plumbing	
Supply	Hose set provided
Pressure	Max. 1MPa (150psi); Min. 50KPa (7psi); Min 6 litres/min

PRODUCT DIMENSIONS

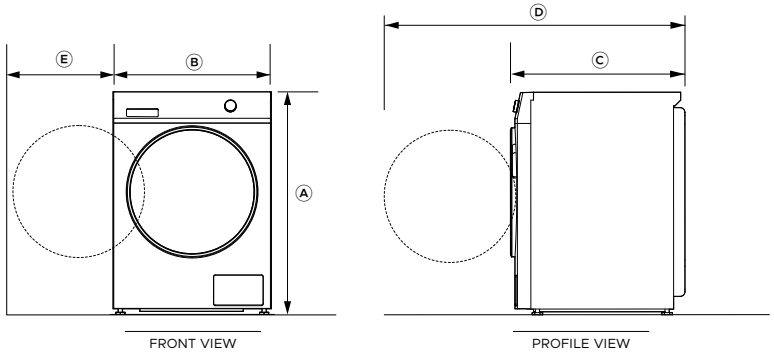

		mm
A	verall height	850
	Height of adjustable mounted feet	min -5 max +10
B	verall width	600
C	verall depth*	665
D	epth with the door open	1080
E	oor clearance to adjacent wall	min 355

*Includes dial and door when closed

CAVITY DIMENSIONS: STANDARD INSTALLATION

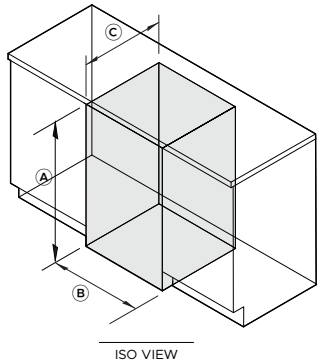

		mm
A	inimum height	862
B	inimum width	624
C	inimum overall cavity depth	
	· Flush with front panel of the product	665
	· In cupboard	725
	Minimum gap clearance to adjacent product or cabinetry*	12

*Applies to sides and top

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown.Do not use this Planning Guide as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website fisherpaykel.com

W

SPECIFICATIONS

Model No.	DH9060H1, DH9060HG1
Dimensions	H 850mm W 600mm D 655mm
Weight	53kg
Electrical	
Supply	220 – 240V, 50Hz
Service	10 Amps
Outlet	3-prong grounding-type
Plumbing	
Supply	Hose set provided
Pressure	Max. 1MPa (150psi); Min. 50KPa (7psi); Min 6 litres/min

PRODUCT DIMENSIONS

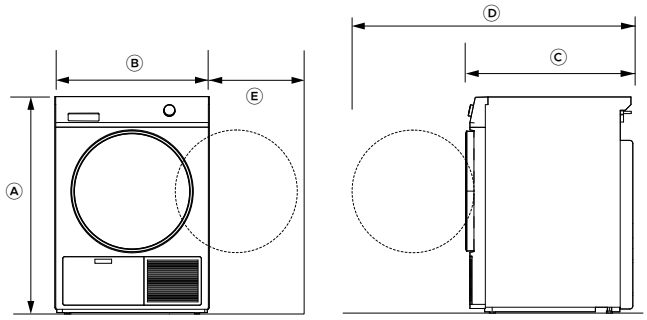

FRONT VIEW PROFILE VIEW

		mm
Ⓐ	verall height	850
	Height of adjustable mounted feet	min -5 max +5
Ⓑ	verall width	600
Ⓒ	verall depth*	655
Ⓓ	epth with the door open**	1080
Ⓔ	oor clearance to adjacent wall**	min 344

* Includes dial and door when closed
**Left hinge and right hinge capable

CAVITY DIMENSIONS: STANDARD INSTALLATION



ISO VIEW

		mm
Ⓐ	inimum height	862
Ⓑ	verall width	624
Ⓒ	verall cavity depth	
	· Flush with front panel of the product	665
	· In cupboard	715
	Minimum gap clearance to adjacent product or cabinetry*	12

* Applies to sides and top

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown.Do not use this Planning Guide as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website fisherpaykel.com

 © FISHER & PAYKEL LIMITED 2026

SPECIFICATIONS

Model No.	DH9060HL1, DH9060HLG11
Dimensions	H 850mm W 600mm D 655mm
Weight	53kg
Electrical	
Supply	220 – 240V, 50Hz
Service	10 Amps
Outlet	3-prong grounding-type
Plumbing	
Supply	Hose set provided
Pressure	Max. 1MPa (150psi); Min. 50KPa (7psi); Min 6 litres/min

*Heat Pump controlled through Washer interface

PRODUCT DIMENSIONS

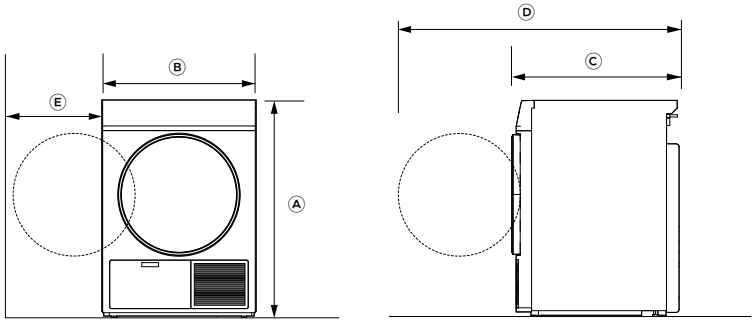

FRONT VIEW PROFILE VIEW

		mm
A	verall height	850
	Height of adjustable mounted feet	min -5 max +5
B	verall width	600
C	verall depth*	655
D	epth with the door open**	1080
E	oor clearance to adjacent wall**	min 344

* Includes door when closed
**Left hinge and right hinge capable

CAVITY DIMENSIONS: STANDARD INSTALLATION



ISO VIEW

		mm
A	inimum height	862
B	verall width	624
C	verall cavity depth	
	· Flush with front panel of the product	665
	· In cupboard	715
	Minimum gap clearance to adjacent product or cabinetry*	12

* Applies to sides and top

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown.Do not use this Planning Guide as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website fisherpaykel.com

SPECIFICATIONS

Model No.	FC1260HG1, FC1260H1
Dimensions	H 1900mm W 600mm D 700mm
Weight	130kg
Electrical	
Supply	220 – 240V, 50Hz
Service	10 Amps
Outlet	3-prong grounding-type

PRODUCT DIMENSIONS

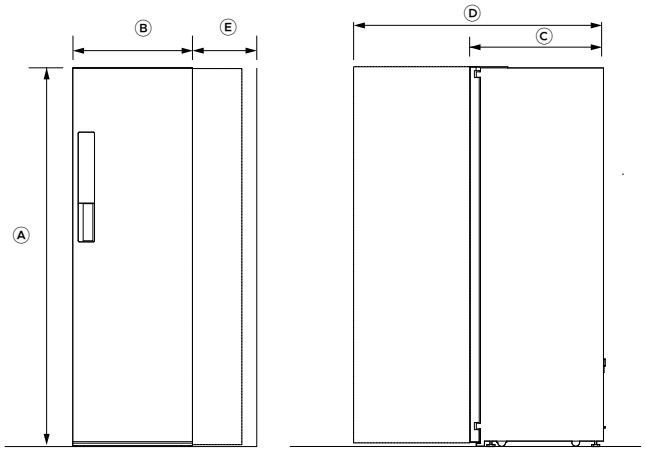

FRONT VIEW PROFILE VIEW

		mm
A	verall height	1900
	Height of adjustable mounted feet	min -5 max +5
B	verall width	600
C	verall depth	700
D	epth with the door open	1285
E	oor clearance to adjacent wall	min 235
	with 900 hinge pin installed	min 50

CAVITY DIMENSIONS: STANDARD INSTALLATION

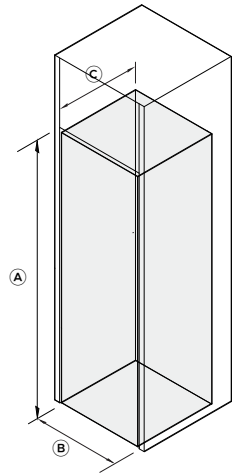

ISO VIEW

		mm
A	inimum height	1920
B	verall width	640
C	verall cavity depth	700
	Minimum gap clearance to adjacent product or cabinetry*	20

* Applies to sides and top

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown.Do not use this Planning Guide as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website fisherpaykel.com

DATA SHEETS

 © FISHER & PAYKEL LIMITED 2026

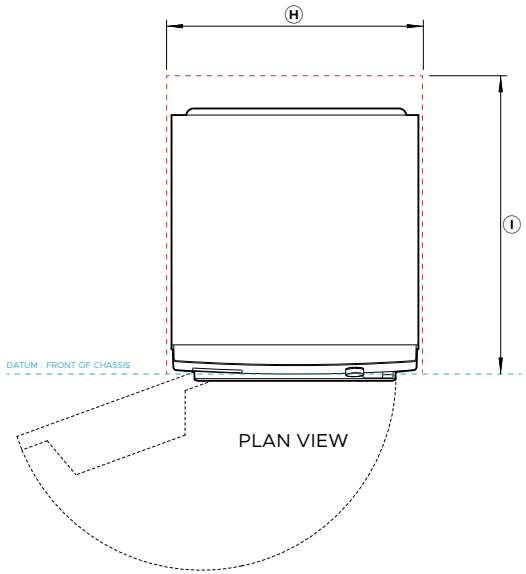

PLAN VIEW

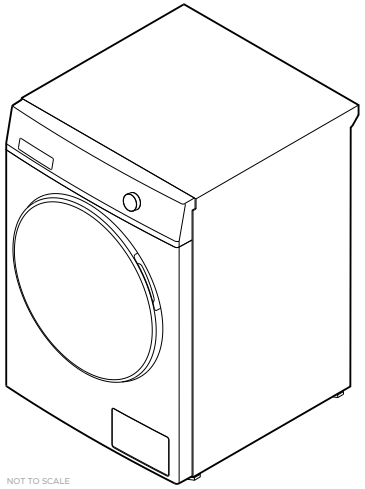

NOT TO SCALE

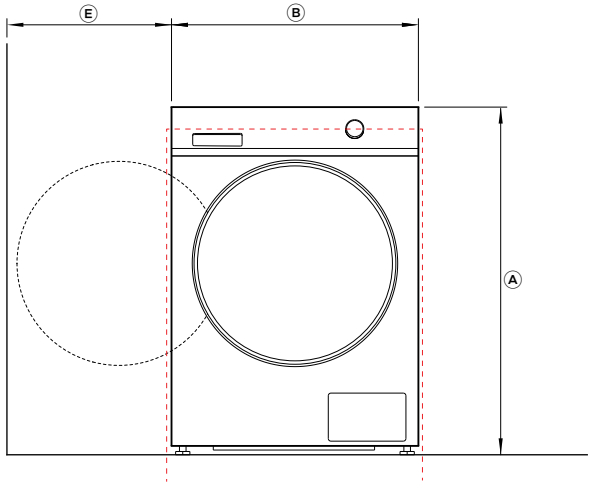

FRONT VIEW

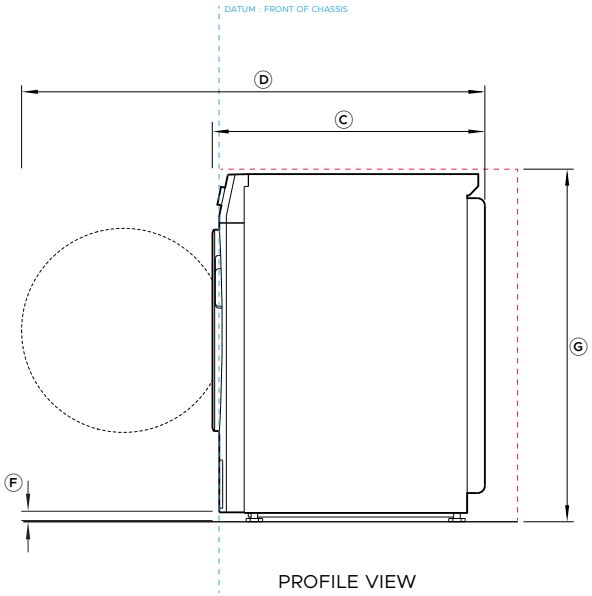

PROFILE VIEW

Model no:

Front Loader Washing Machine, White - WH1160H1
Front Loader Washing Machine, Graphite - WH1160HG1

Product Dimensions	mm
Ⓐ Overall height*	850
Ⓑ Overall width	600
Ⓒ Overall depth	665
Ⓓ Depth with the door open	1080
Ⓔ Door clearance to adjacent wall	min 355
Ⓕ Height of adjustable mounted feet	min -5 max 10

* Includes dial and door when closed

Cavity Dimensions: Standard Installation	mm
Ⓖ Overall height of cavity*	862
Ⓗ Minimum width	624
Ⓘ Minimum overall cavity depth • Flush with front panel of the product	665
Minimum gap clearance to adjacent product or cabinetry**	12

* Depends on feet adjustment
** Applies to sides and top

INDICATES CABINETRY / PRODUCT DATUM ----------
INDICATES CABINETRY CLEARANCES ----------

IMPORTANT NOTE: Throughout this guide, dimensions may vary by +/-2mm. Please read the Installation Guide for detailed information on installing the product. For full installation instructions visit fisherpaykel.com

© FISHER & PAYKEL LIMITED 2026

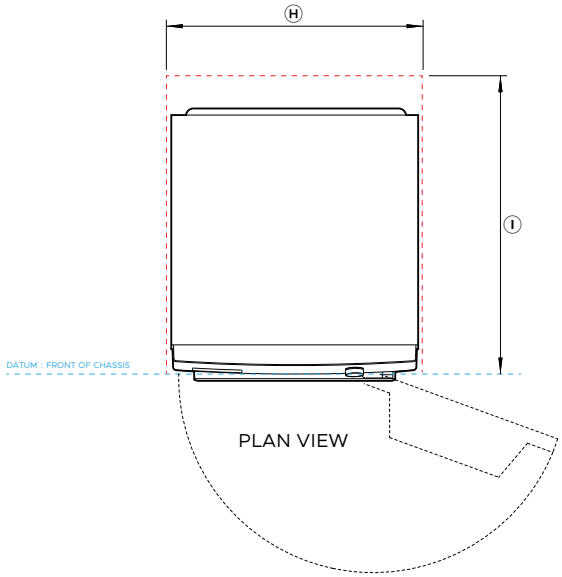

PLAN VIEW

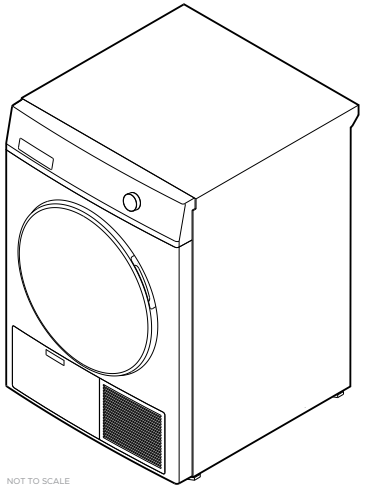

NOT TO SCALE

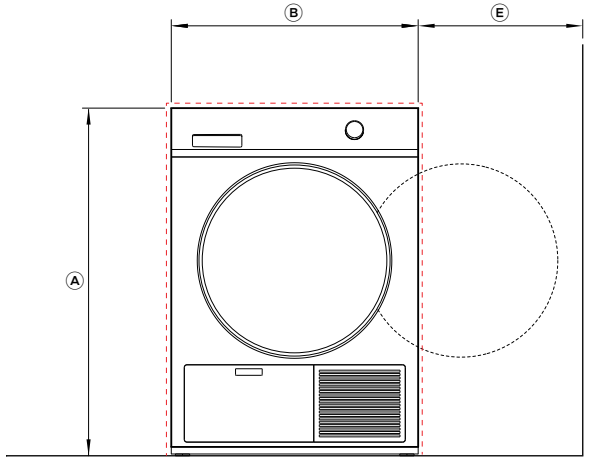

FRONT VIEW

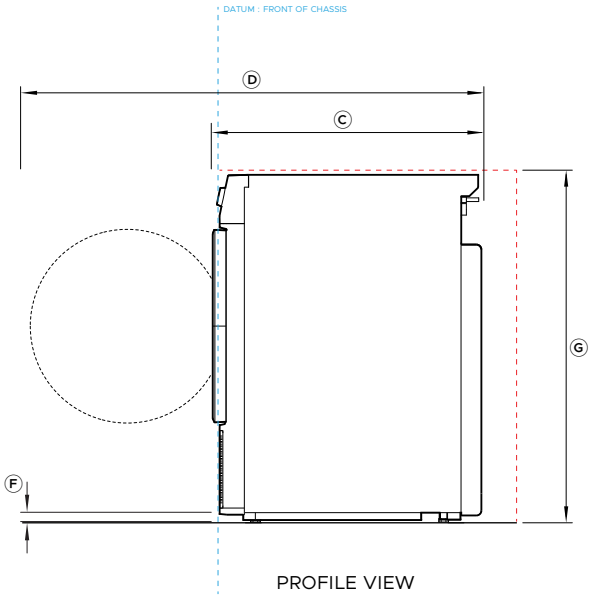

PROFILE VIEW

0 100 200 400

Millimetres

Model no:
Heat Pump Dryer, Display, White - DH9060H1
Heat Pump Dryer, Display, Graphite - DH9060HG1

Product Dimensions	mm
Ⓐ Overall height*	850
Ⓑ Overall width	600
Ⓒ Overall depth	655
Ⓓ Depth with the door open	1080
Ⓔ Door clearance to adjacent wall**	min 344
Ⓕ Height of adjustable mounted feet	min -5 max 5

* Includes dial and door when closed
**Left hinge and right hinge capable

Cavity Dimensions: Standard Installation	mm
Ⓖ Overall height of cavity*	862
Ⓗ Minimum width	624
Ⓘ Minimum overall cavity depth • Flush with front panel of the product	665
Minimum gap clearance to adjacent product or cabinetry**	12

* Depends on feet adjustment
** Applies to sides and top

INDICATES CABINETRY / PRODUCT DATUM ----------
INDICATES CABINETRY CLEARANCES ----------

IMPORTANT NOTE: Throughout this guide, dimensions may vary by +/-2mm. Please read the Installation Guide for detailed information on installing the product. For full installation instructions visit fisherpaykel.com

© FISHER & PAYKEL LIMITED 2026

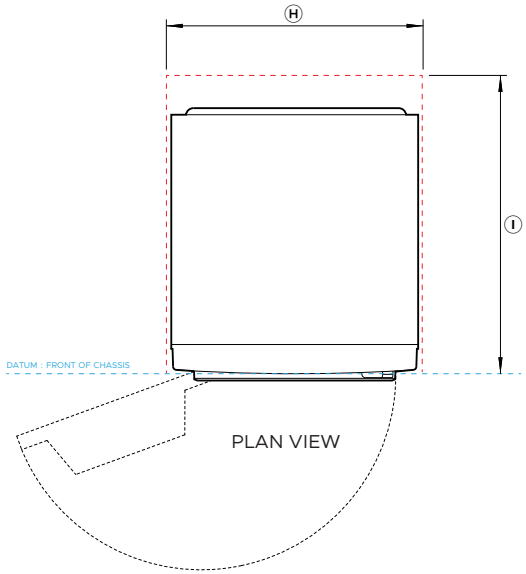

PLAN VIEW

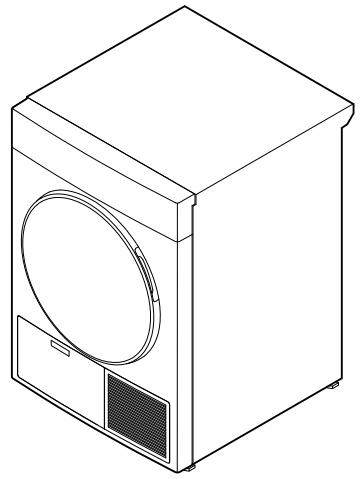

NOT TO SCALE

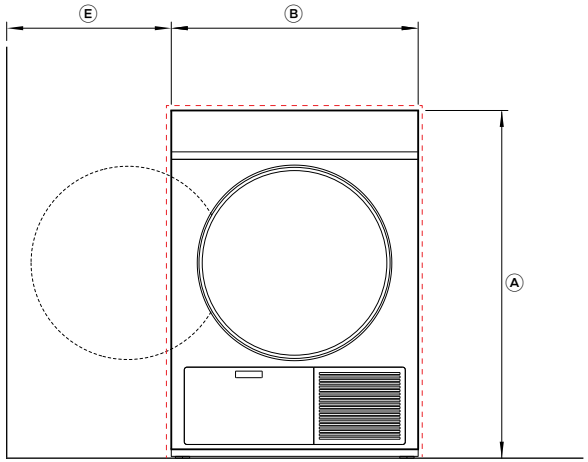

FRONT VIEW

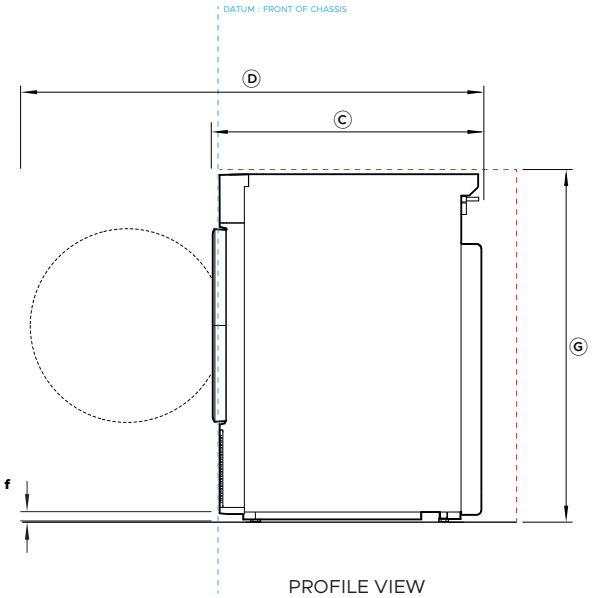

PROFILE VIEW

0 100 200 400
Millimetres

Model no:

Heat Pump Dryer, Display-free, White - DH9060HL1
Heat Pump Dryer, Display-free, Graphite - DH9060HLG1

*Heat Pump controlled through Washer interface

Product Dimensions	mm
Ⓐ Overall height*	850
Ⓑ Overall width	600
Ⓒ Overall depth	665
Ⓓ Depth with the door open	1080
Ⓔ Door clearance to adjacent wall**	min 344
Ⓕ Height of adjustable mounted feet	min -5 max 5

* Includes dial and door when closed
**Left hinge and right hinge capable

Cavity Dimensions: Standard Installation	mm
Ⓖ Overall height of cavity*	862
Ⓗ Minimum width	624
Ⓘ Minimum overall cavity depth • Flush with front panel of the product	665
Minimum gap clearance to adjacent product or cabinetry**	12

* Depends on feet adjustment
** Applies to sides and top

INDICATES CABINETRY / PRODUCT DATUM ----------
INDICATES CABINETRY CLEARANCES ----------

IMPORTANT NOTE: Throughout this guide, dimensions may vary by +/-2mm. Please read the Installation Guide for detailed information on installing the product. For full installation instructions visit fisherpaykel.com

© FISHER & PAYKEL LIMITED 2026

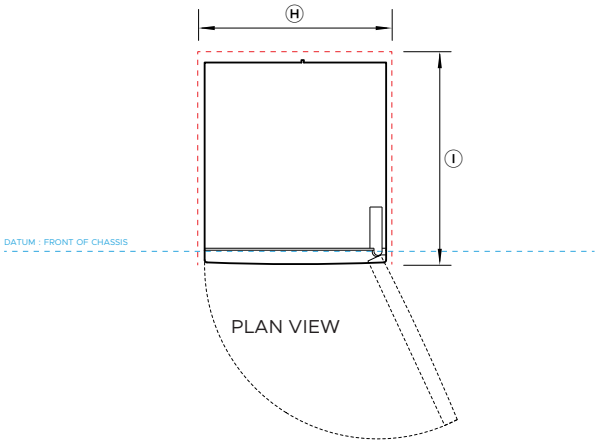

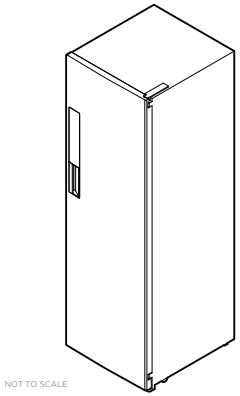

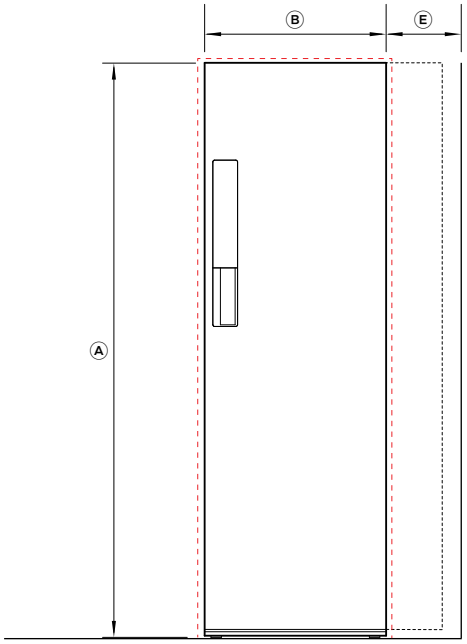

FRONT VIEW

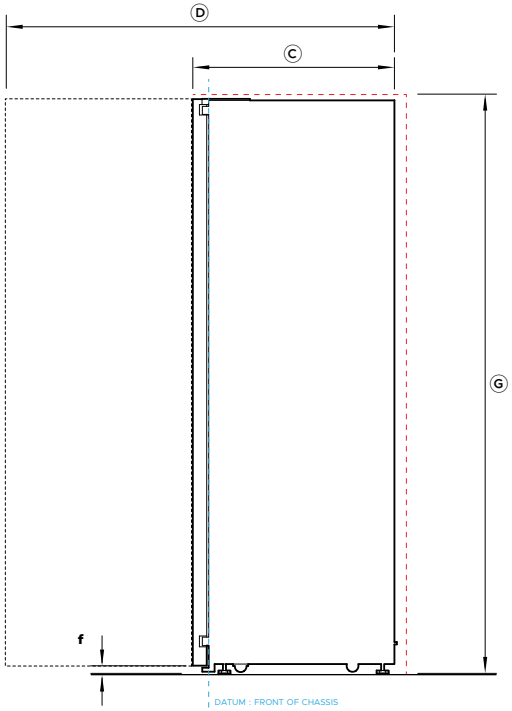

PROFILE VIEW

Model no:

Fabric Care Cabinet, White - FC1260H1
Fabric Care Cabinet, Graphite - FC1260HG1

Product Dimensions	mm
Ⓐ Overall height	1900
Ⓑ Overall width	600
Ⓒ Overall depth	700
Ⓓ Depth with the door open	1285
Ⓔ Door clearance to adjacent wall	min 235
with 900 hinge pin included	min 50
Ⓕ Height of adjustable mounted feet	min -5 max 5

Cavity Dimensions: Standard Installation	mm
Ⓖ Overall height of cavity*	1920
Ⓗ Minimum width	640
Ⓘ Minimum overall cavity depth	700
Minimum gap clearance to adjacent product or cabinetry**	20

* Depends on feet adjustment
** Applies to sides and top

INDICATES CABINETRY / PRODUCT DATUM ----------
INDICATES CABINETRY CLEARANCES ----------

IMPORTANT NOTE: Throughout this guide, dimensions may vary by +/-2mm. Please read the Installation Guide for detailed information on installing the product. For full installation instructions visit fisherpaykel.com

 © FISHER & PAYKEL LIMITED 2026

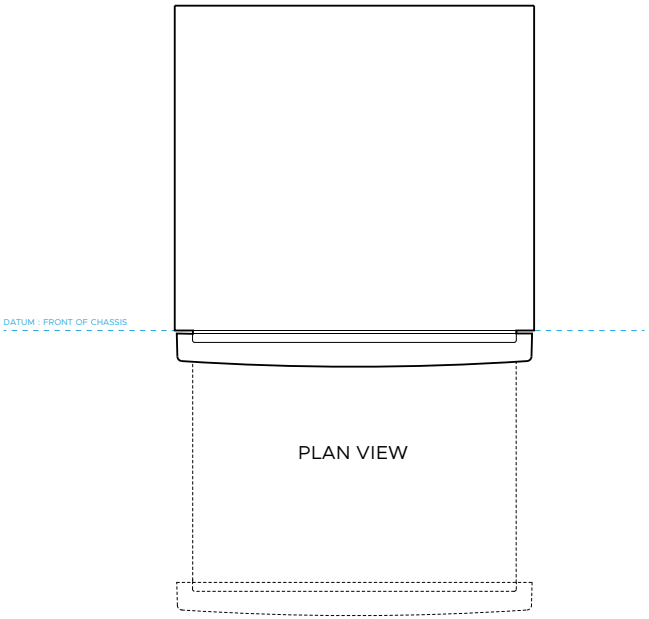

PLAN VIEW

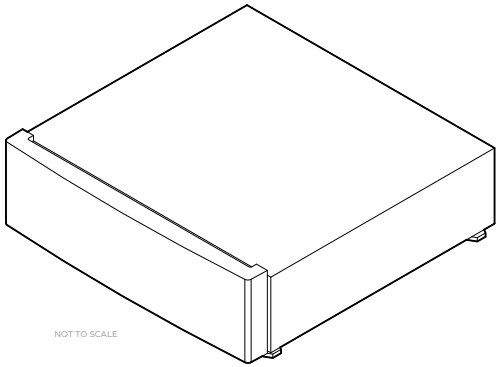

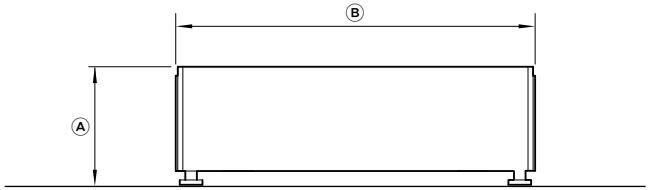

FRONT VIEW

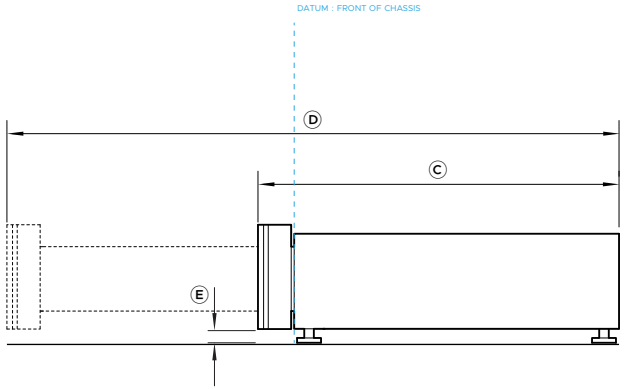

PROFILE VIEW

Model no:

Storage Plinth, Graphite - FM2060SG1

Storage Plinth, White - FM2060S1

Product Dimensions	mm
Ⓐ Overall height	200
Ⓑ Overall width	600
Ⓒ Overall depth	605
Ⓓ Depth with the drawer open	1040
Ⓔ Height of adjustable mounted feet	min -5 max 10

IMPORTANT NOTE: For installation instructions please refer to our installation manual.

INDICATES CABINETRY / PRODUCT DATUM ----------

INDICATES CABINETRY CLEARANCES ----------

IMPORTANT NOTE: Throughout this guide, dimensions may vary by +/-2mm. Please read the Installation Guide for detailed information on installing the product. For full installation instructions visit fisherpaykel.com

© FISHER & PAYKEL LIMITED 2026

GAP CONSIDERATIONS

© FISHER & PAYKEL LIMITED 2026

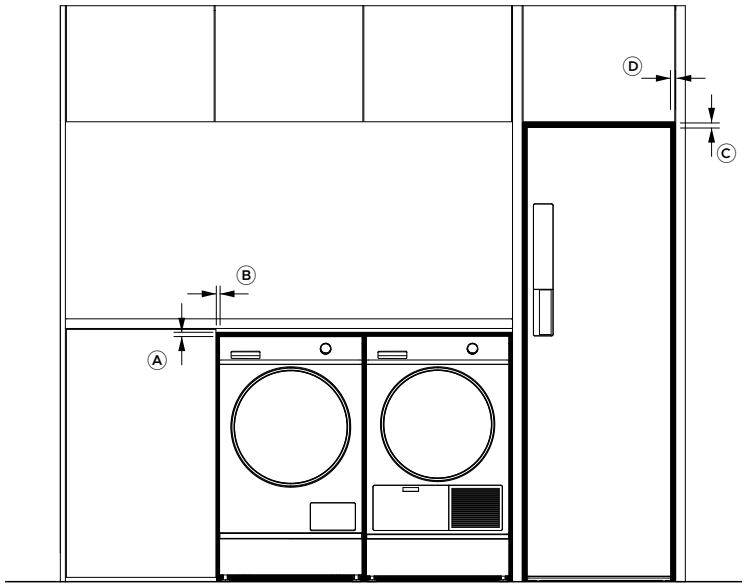

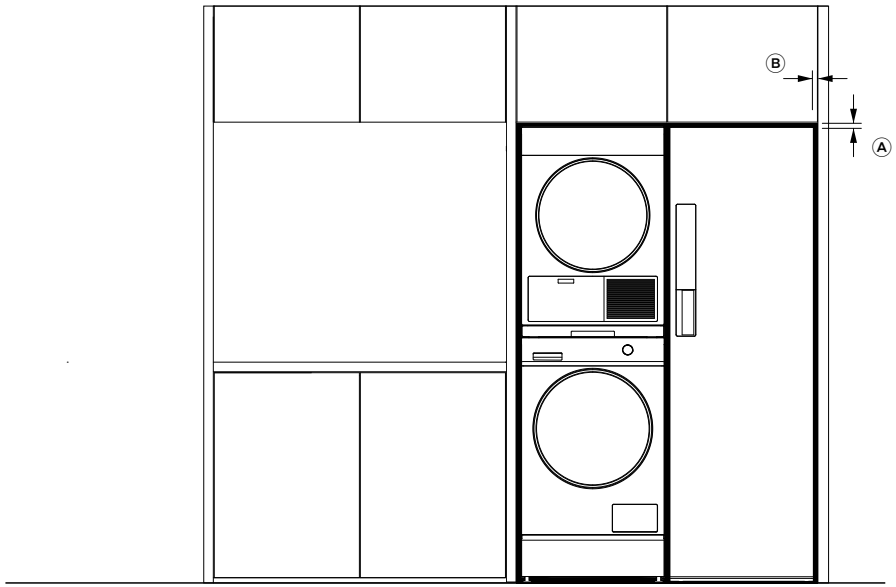

GAP CONSIDERATIONS FABRIC CARE CABINET AND LAUNDRY IN SEPARATE CABINETS	
Ⓐ Horizontal gap Washing Machine and Heat Pump Dryer	12
Ⓑ Vertical gap Washing Machine and Heat Pump Dryer	12
Ⓒ Horizontal gap Fabric Care Cabinet	20
Ⓓ Vertical gap Fabric Care Cabinet	20

GAP CONSIDERATIONS FABRIC CARE CABINET AND LAUNDRY IN JOINED CABINET	
Ⓐ Horizontal gap Washing Machine and Heat Pump Dryer and Fabric Care Cabinet	20
Ⓑ Vertical gap Washing Machine and Heat Pump Dryer and Fabric Care Cabinet	20

 © FISHER & PAYKEL LIMITED 2026

FLUSH & PROUD INSTALLATION

 © FISHER & PAYKEL LIMITED 2026

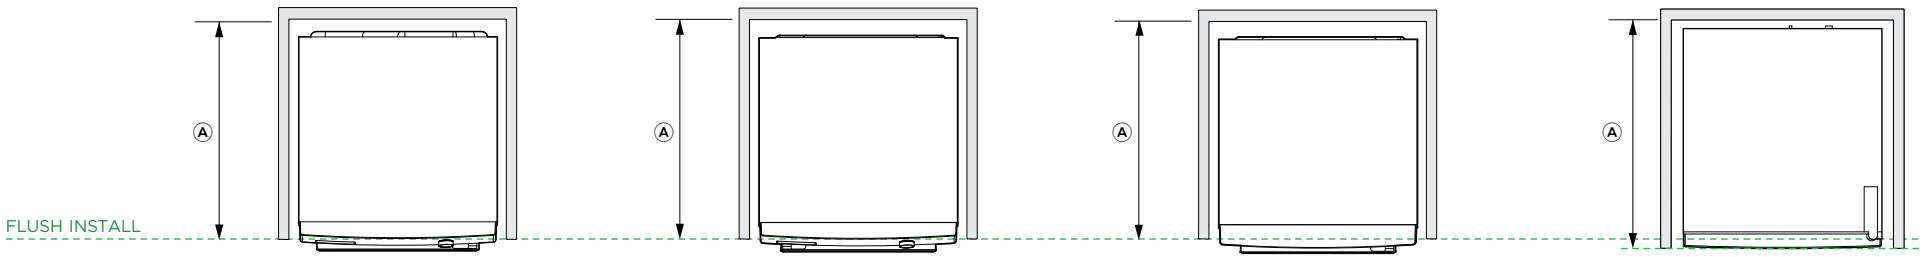

Front Load Washing Machine	
WH1160H1, WH1160HG1	

Installation Depth	mm
Ⓐ Flush install cabinet depth	665

Heat Pump Dryer With Display	
DH9060H1, DH9060HG1	

Installation Depth	mm
Ⓐ Flush install cabinet depth	665

Heat Pump Dryer - Display-free	
DH9060HL1, DH9060HLG1	

Installation Depth	mm
Ⓐ Flush install cabinet depth	665

Fabric Care Cabinet	
FC1260HG1, FC1260H1*	

Installation Depth	mm
Ⓐ Flush install cabinet depth	700

IMPORTANT NOTE
Do not install dryers behind a lockable door, a sliding door, or a door hinged on the opposite side to the dryer — any configuration that restricts the dryer door from opening fully.

If installing behind a cabinetry door, it must be hinged on the same side as the dryer. There must be a minimum clearance of 40mm from the front of the dryer door to the internal face of the cabinetry door for the product to operate safely.

The enclosed space must be provided with sufficient ventilation to meet local building code requirements or the door must be open while the product is operating.

IMPORTANT NOTE
This version of our Fabric Care Cabinet uses steam to treat the clothes. Some steam will escape the cabinet. It was designed to have good ventilation around itself, as in a laundry space so moisture will not build up.

If installing within a wardrobe, ensure adequate ventilation during operation (similar to standard laundry space requirements).
Do not operate the Fabric Care Cabinet behind a closed door.

 © FISHER & PAYKEL LIMITED 2026

MULTIPLE INSTALLATION

 © FISHER & PAYKEL LIMITED 2026

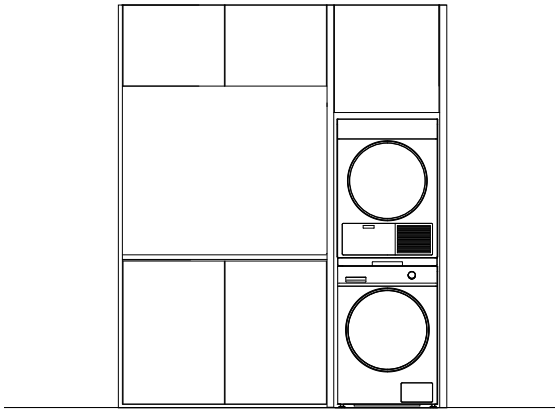

① STACKED

WH1160HG1, WH1160H1
Front Loader Washing Machine

DH9060HLG1, DH9060HL1 (Display-free*)
Heat Pump Dryer

99373, 428159
Stacking Kit

*Heat Pump controlled through Washer interface

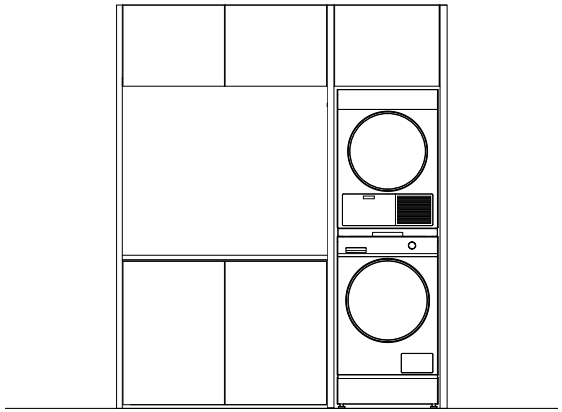

② STACKED WITH PLINTH

WH1160HG1, WH1160H1
Front Loader Washing Machine

DH9060HLG1, DH9060HL1 (Display-free*)
Heat Pump Dryer

FM2060SG1, FM2060S1
Storage Plinth

99373, 428159
Stacking Kit

*Heat Pump controlled through Washer interface

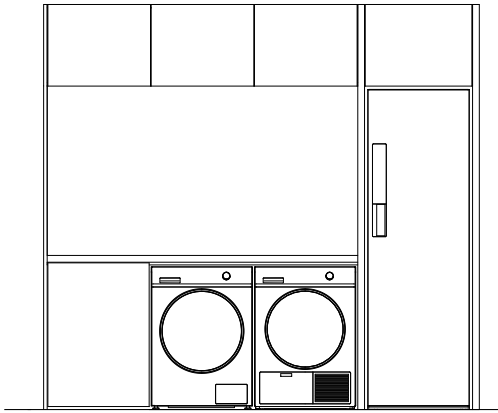

③ SIDE BY SIDE WITH FABRIC CARE CABINET

WH1160HG1, WH1160H1
Front Loader Washing Machine

DH9060HG1, DH9060H1 (With Display)
Heat Pump Dryer

FC1260HG1, FC1260H1
Fabric Care Cabinet

© FISHER & PAYKEL LIMITED 2026

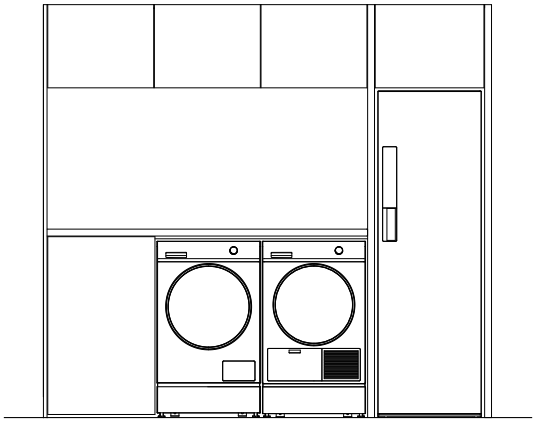

④ SIDE BY SIDE WITH PLINTHS AND FABRIC CARE CABINET

WH1160HG1, WH1160H1
Front Loader Washing Machine

DH9060HG1, DH9060H1 (Display)
Heat Pump Dryer

FC1260HG1, FC1260H1
Fabric Care Cabinet

FM2060SG1, FM2060S1
Storage Plinths x 2

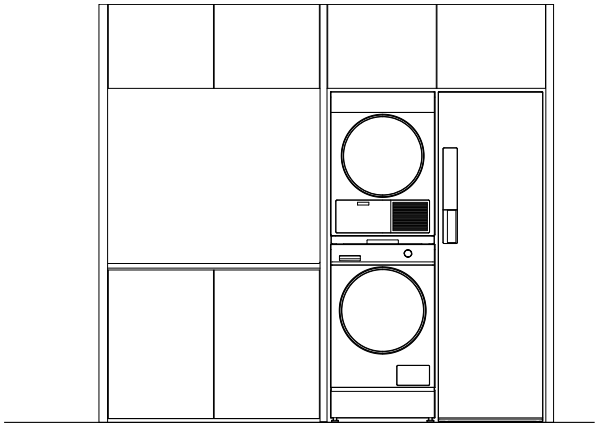

⑤ STACKED WITH PLINTH AND FABRIC CARE CABINET

WH1160HG1, WH1160H1
Front Loader Washing Machine

DH9060HLG1, DH9060HL1 (Display-free*)
Heat Pump Dryer

FC1260HG1, FC1260H1
Fabric Care Cabinet

FM2060SG1, FM2060S1
Storage Plinth

99373, 428159
Stacking Kit

*Heat Pump controlled through Washer interface

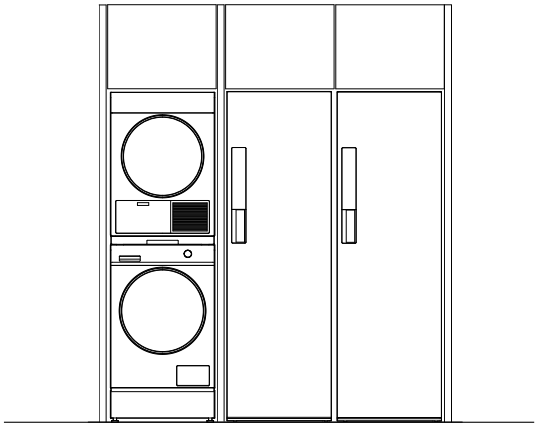

⑥ STACKED WITH PLINTH AND 2X FABRIC CARE CABINETS

WH1160HG1, WH1160H1
Front Loader Washing Machine

DH9060HLG1, DH9060HL1 (Display-free*)
Heat Pump Dryer

FC1260HG1, FC1260H1
Fabric Care Cabinets x 2

FM2060SG1, FM2060S1
Storage Plinth

99373, 428159
Stacking Kit

*Heat Pump controlled through Washer interface

© FISHER & PAYKEL LIMITED 2026

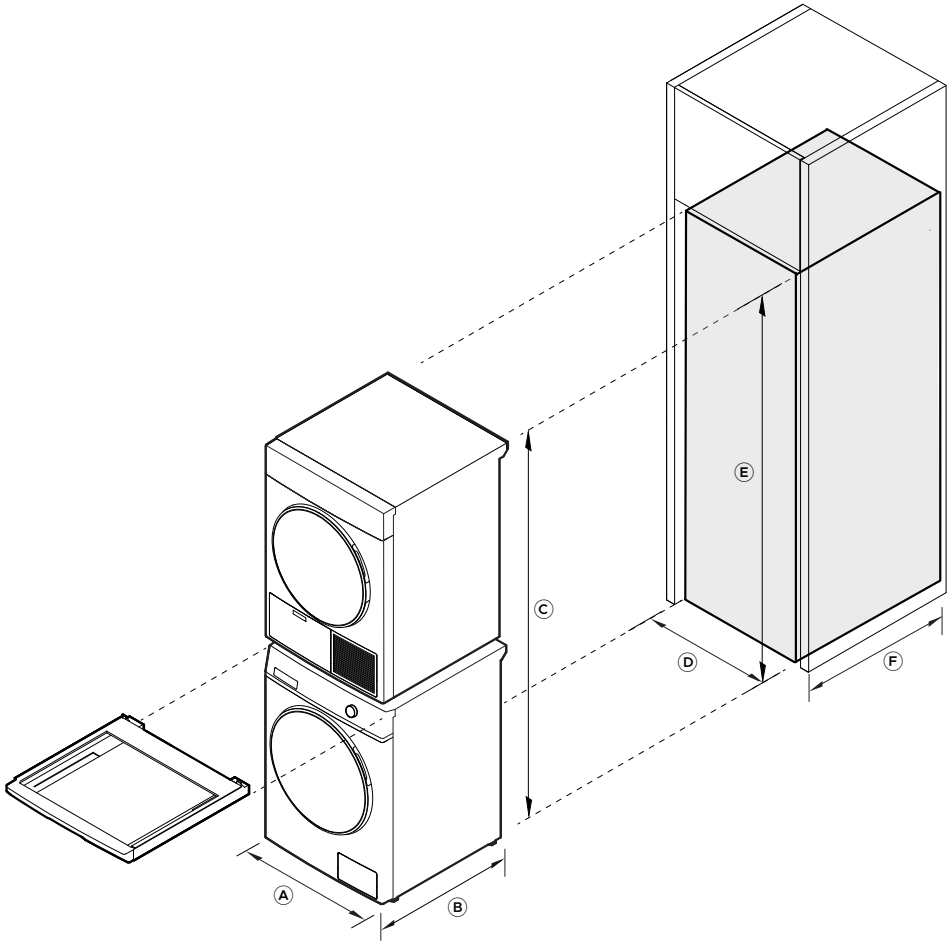

Cavity Dimensions for Flush Installation

Model nos:

Front Loader Washing Machine - WH1160HG1/WH1160H1
Heat Pump Dryer - DH9060HG1/DH9060H1
Stacking Kit - CA99373/CA428159

IMPORTANT
For ease of installation, ensure cavity has consistent dimensions top to bottom and left to right.

Product Dimensions	mm
Ⓐ Overall width Washer, Dryer and Stacking Kit	600
Ⓑ Overall height Washer, Dryer and Stacking Kit	1730
Ⓒ Overall depth Washer, Dryer and Stacking Kit	665

Cavity Dimensions Washer + Dryer + Stacking Kit (Flush Installation)	mm
Ⓓ Overall width*	624
Ⓔ Overall height*	1742
Ⓕ Overall depth	665

*Includes 12mm surrounding gap

IMPORTANT NOTE: Throughout this guide, dimensions may vary by +/-2mm. Please read the Installation Guide for detailed information on installing the product. For full installation instructions visit fisherpaykel.com

 © FISHER & PAYKEL LIMITED 2026

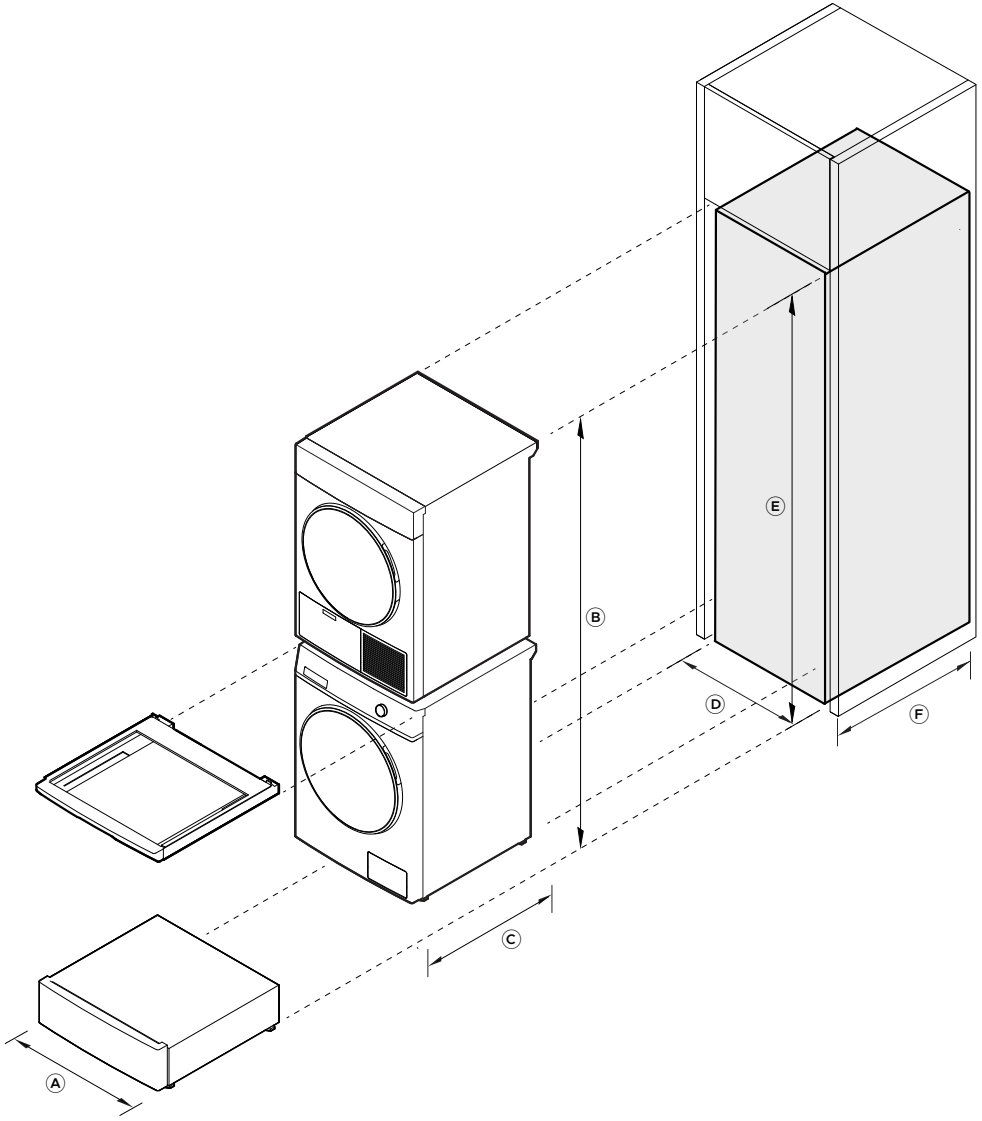

Cavity Dimensions for Flush Installation

Model nos:

Front Loader Washing Machine - WH1160HG1/WH1160H1
Heat Pump Dryer - DH9060HG1/DH9060H1
Stacking Kit - 99373/428159
Storage Plinth - FM2060SG1/FM2060S1

IMPORTANT
For ease of installation, ensure cavity has consistent dimensions top to bottom and left to right.

Product Dimensions	mm
Ⓐ Overall width Washer, Dryer, Plinth and Stacking Kit	600
Ⓑ Overall height Washer, Dryer, Plinth and Stacking Kit	1900
Ⓒ Overall depth Washer, Dryer, Plinth and Stacking Kit	665

Cavity Dimensions Washer + Dryer + Storage Plinth + Stacking Kit (Flush Installation)	mm
Ⓓ Overall width*	624
Ⓔ Overall height*	1912
Ⓕ Overall depth	665

*Includes 12 mm surrounding gap

IMPORTANT NOTE: Throughout this guide, dimensions may vary by +/-2mm. Please read the Installation Guide for detailed information on installing the product. For full installation instructions visit fisherpaykel.com

 © FISHER & PAYKEL LIMITED 2026

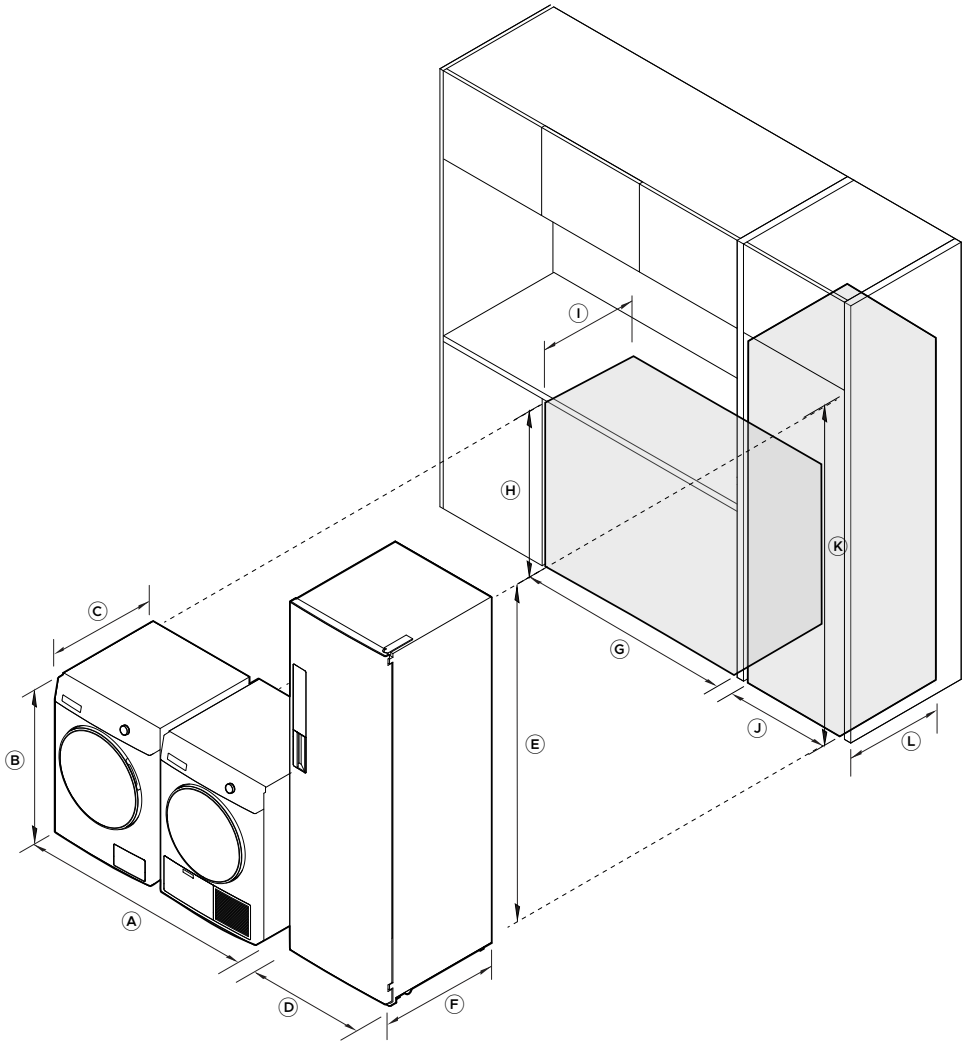

Cavity Dimensions for Flush Installation

Model nos:

Front Loader Washing Machine - WH1160HG1/WH1160H1
Heat Pump Dryer - DH9060HG1/DH9060H1
Fabric Care Cabinet - FC1260HG1/FC1260H1

IMPORTANT
For ease of installation, ensure cavity has consistent dimensions top to bottom and left to right.

Product Dimensions	mm
Ⓐ Overall width Washer and Dryer	1212
Ⓑ Overall height Washer and Dryer	850
Ⓒ Overall depth Washer and Dryer	665
Ⓓ Overall width Fabric Care Cabinet	600
Ⓔ Overall height Fabric Care Cabinet	1900
Ⓕ Overall depth Fabric Care Cabinet	700

Cavity Dimensions Washer + Dryer (Flush Installation)	mm
Ⓖ Overall width*	1236
Ⓗ Overall height*	862
Ⓘ Overall depth	665

*Includes 12 mm surrounding gap

Cavity Dimensions Fabric Care Cabinet (Flush Installation)	mm
Ⓙ Overall width*	640
Ⓚ Overall height*	1920
Ⓛ Overall depth	700

*Includes 20 mm surrounding gap

IMPORTANT NOTE: Throughout this guide, dimensions may vary by +/-2mm. Please read the Installation Guide for detailed information on installing the product. For full installation instructions visit fisherpaykel.com

 © FISHER & PAYKEL LIMITED 2026

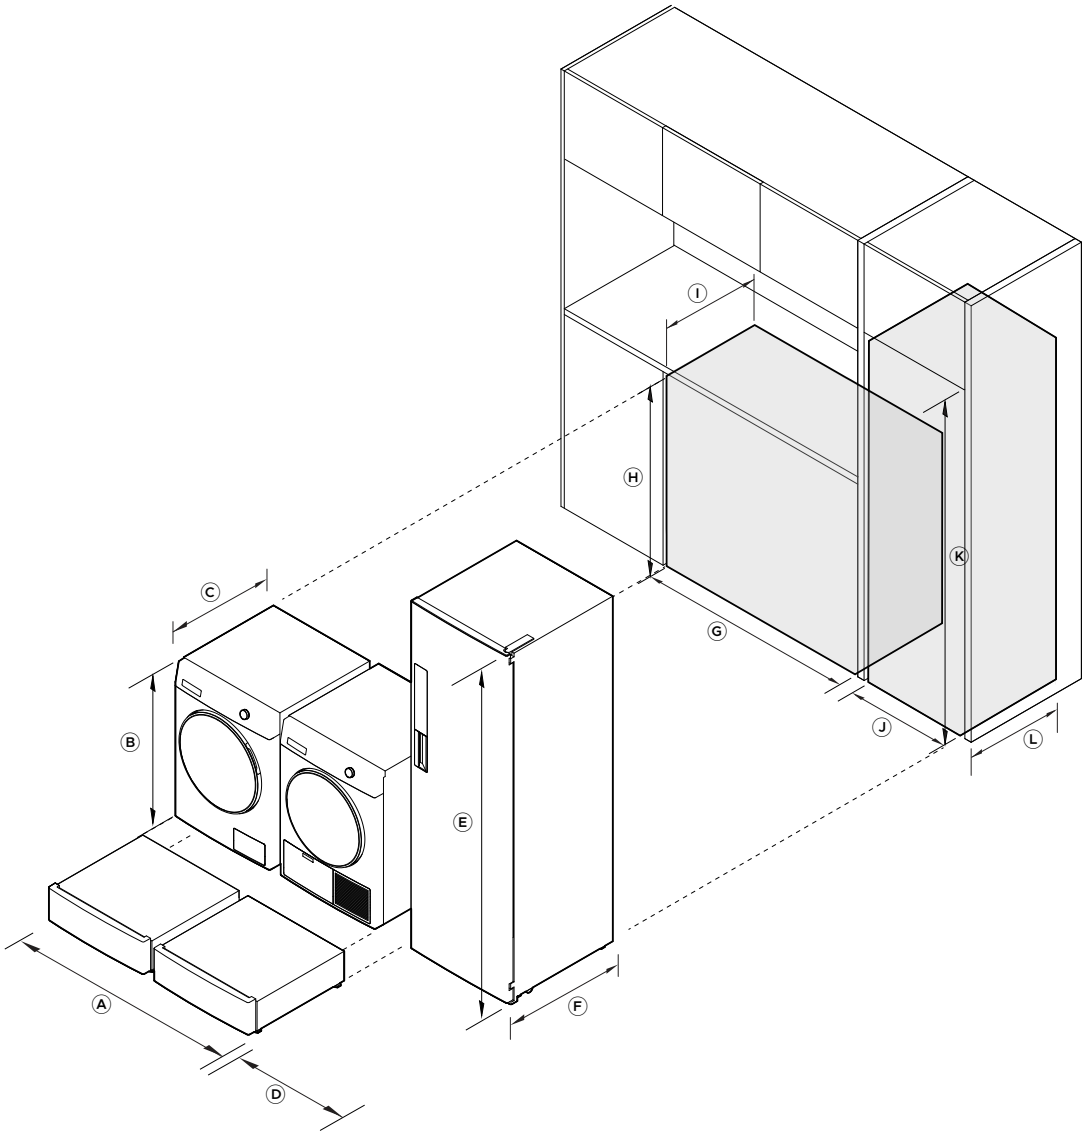

Cavity Dimensions for Flush Installation

Model nos:

Front Loader Washing Machine - WH1160HG1/WH1160H1
Heat Pump Dryer - DH9060HG1/DH9060H1
Fabric Care Cabinet - FC1260HG1/FC1260H1
Storage Plinth - FM2060SG1/FM2060S1

IMPORTANT
For ease of installation, ensure cavity has consistent dimensions top to bottom and left to right.

Product Dimensions	mm
Ⓐ Overall width Washer, Dryer and Storage Plinth	1212
Ⓑ Overall height Washer, Dryer and Storage Plinth	1030
Ⓒ Overall depth Washer, Dryer and Storage Plinth	665
Ⓓ Overall width Fabric Care Cabinet	600
Ⓔ Overall height Fabric Care Cabinet	1900
Ⓕ Overall depth Fabric Care Cabinet	700

Cavity Dimensions Washer + Dryer + Storage Plinth (Flush Installation)	mm
Ⓖ Overall width*	1236
Ⓗ Overall height*	1042
Ⓘ Overall depth	700

*Includes 12 mm surrounding gap

Cavity Dimensions Fabric Care Cabinet (Flush Installation)	mm
Ⓙ Overall width*	640
Ⓚ Overall height*	1920
Ⓛ Overall depth	700

*Includes 20 mm surrounding gap

IMPORTANT NOTE: Throughout this guide, dimensions may vary by +/-2mm. Please read the Installation Guide for detailed information on installing the product. For full installation instructions visit fisherpaykel.com

© FISHER & PAYKEL LIMITED 2026

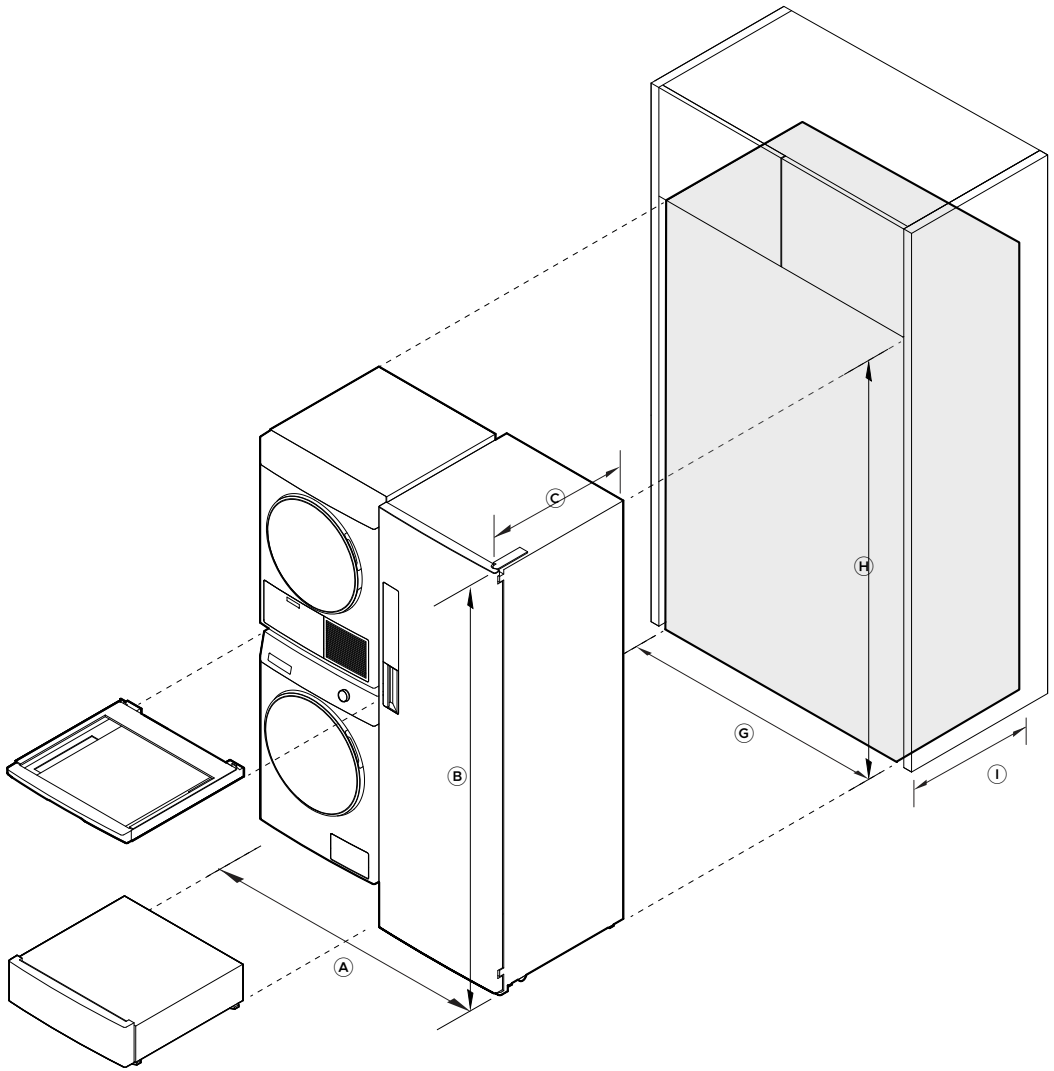

Cavity Dimensions for Flush Installation

Model nos:

Front Loader Washing Machine - WH1160HG1/WH1160H1
Heat Pump Dryer - DH9060HG1/DH9060H1
Fabric Care Cabinet - FC1260HG1/FC1260H1
Stacking Kit - 99373/428159
Storage Plinth - FM2060SG1/FM2060S1

IMPORTANT
For ease of installation, ensure cavity has consistent dimensions top to bottom and left to right.

Product Dimensions	mm
Ⓐ Overall width Washer, Dryer, Plinth,Stacking Kit and Fabric Care Cabinet	1220
Ⓑ Overall height Washer, Dryer, Plinth,Stacking Kit and Fabric Care Cabinet	1900
Ⓒ Overall depth Washer, Dryer, Plinth,Stacking Kit and Fabric Care Cabinet	700

Cavity Dimensions Washer + Dryer + Plinth + Stacking Kit + Fabric Care Cabinet (Flush Installation)	mm
Ⓖ Overall width*	1260
Ⓗ Overall height*	1920
Ⓘ Overall depth	700

*Includes 20mm surrounding gap

IMPORTANT NOTE: Throughout this guide, dimensions may vary by +/-2mm. Please read the Installation Guide for detailed information on installing the product. For full installation instructions visit fisherpaykel.com

© FISHER & PAYKEL LIMITED 2026

6 STACKED WITH PLINTH AND 2X FABRIC CARE CABINET

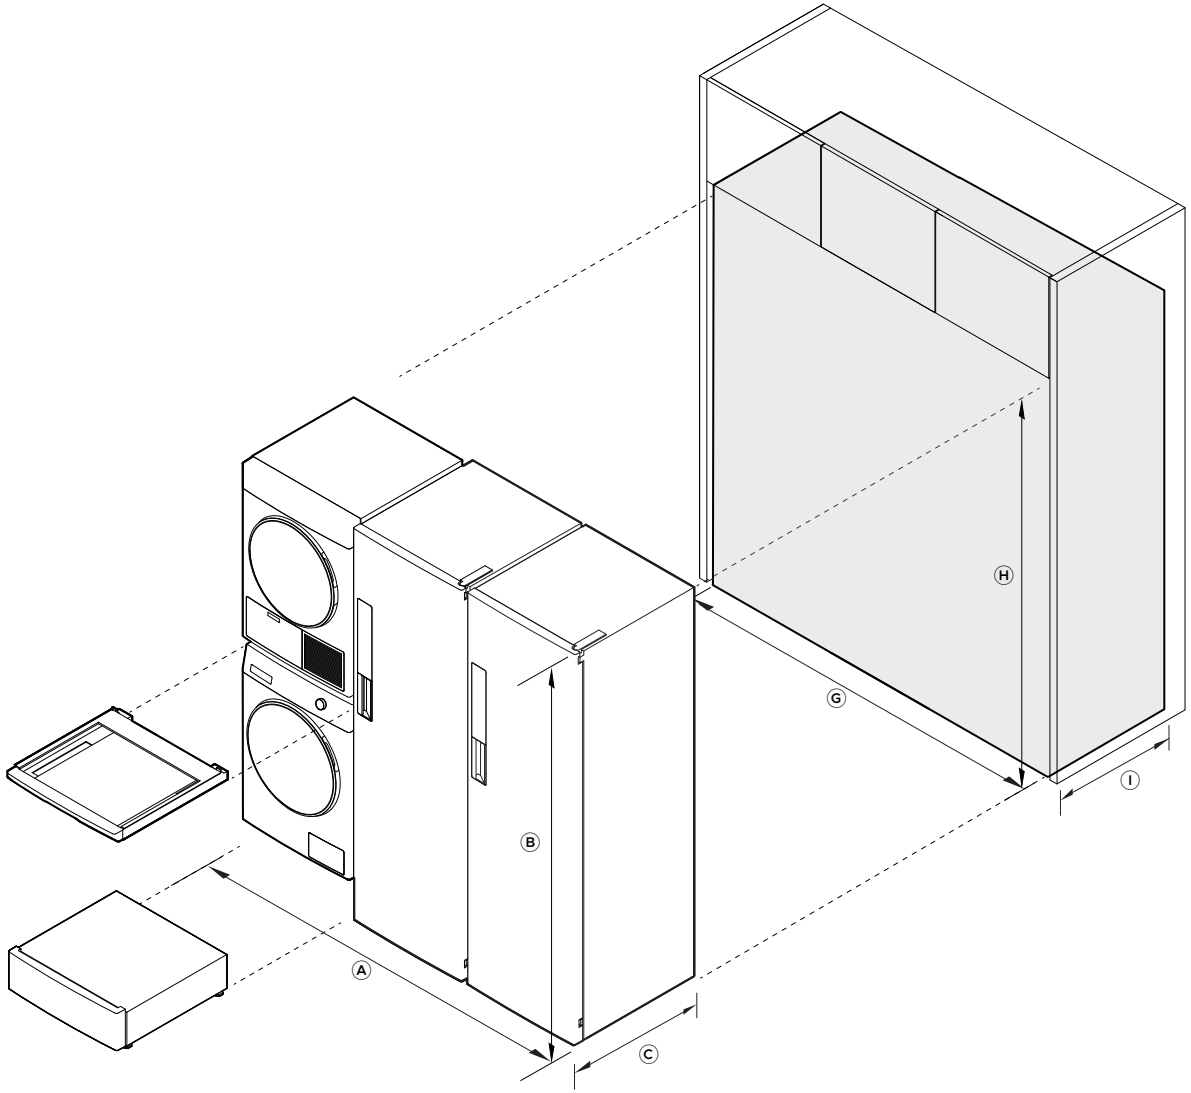

Cavity Dimensions for Flush Installation

Model nos:

Front Loader Washing Machine - WH1160HG1/WH1160H1
Heat Pump Dryer - DH9060HG1/DH9060H1
2x Fabric Care Cabinets - FC1260HG1/FC1260H1
Stacking Kit - 99373/428159
Storage Plinth - FM2060SG1/FM2060S1

IMPORTANT
For ease of installation, ensure cavity has consistent dimensions top to bottom and left to right.

Product Dimensions	mm
Ⓐ Overall width Washer, Dryer, Plinth,Stacking Kit and 2x Fabric Care Cabinets	1840
Ⓑ Overall height Washer, Dryer, Plinth,Stacking Kit and 2x Fabric Care Cabinets	1900
Ⓒ Overall depth Washer, Dryer, Plinth,Stacking Kit and Fabric Care Cabinet	700

Cavity Dimensions Washer + Dryer + Plinth + Stacking Kit + 2x Fabric Care Cabinets (Flush Installation)	mm
Ⓖ Overall width*	1880
Ⓗ Overall height*	1920
Ⓘ Overall depth	700

*Includes 20mm surrounding gap

IMPORTANT NOTE: Throughout this guide, dimensions may vary by +/-2mm. Please read the Installation Guide for detailed information on installing the product. For full installation instructions visit fisherpaykel.com

 © FISHER & PAYKEL LIMITED 2026

DOOR OPENING & DOOR SWING

© FISHER & PAYKEL LIMITED 2026

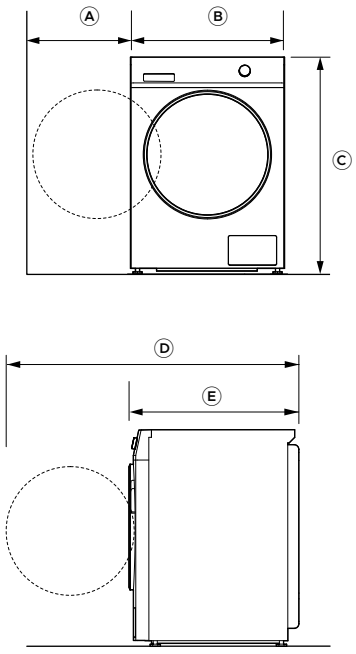

Door opening clearance
Front Loader Washing Machine
WH1160H1, WH1160HG1

	mm
Ⓐ Overall width	600
Ⓑ Door clearance to adjacent wall	min. 355
Ⓒ Overall height	850
Ⓓ Depth with door open	1080
Ⓔ Overall depth	665

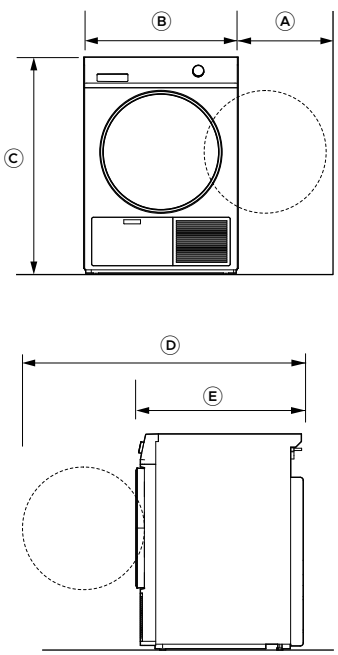

Door opening clearance
Heat Pump Dryer - Display
DH9060H1, DH9060HG1

	mm
Ⓐ Overall width	600
Ⓑ Door clearance to adjacent wall	min. 344
Ⓒ Overall height	850
Ⓓ Depth with door open	1080
Ⓔ Overall depth	655

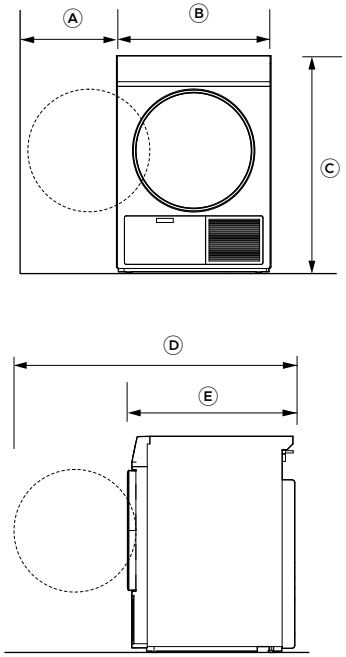

Door opening clearance
Heat Pump Dryer - Display-free
DH9060HL1, DH9060HLG1

	mm
Ⓐ Overall width	600
Ⓑ Door clearance to adjacent wall	min. 344
Ⓒ Overall height	850
Ⓓ Depth with door open	1080
Ⓔ Overall depth	655

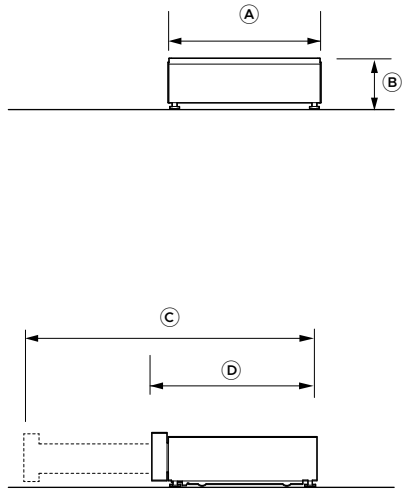

Door opening clearance
Storage Plinth
FM2060S1, FM2060SG1

	mm
Ⓐ Overall width	600
Ⓑ Overall height	200
Ⓒ Depth with drawer open	1040
Ⓓ Overall depth	603

 © FISHER & PAYKEL LIMITED 2026

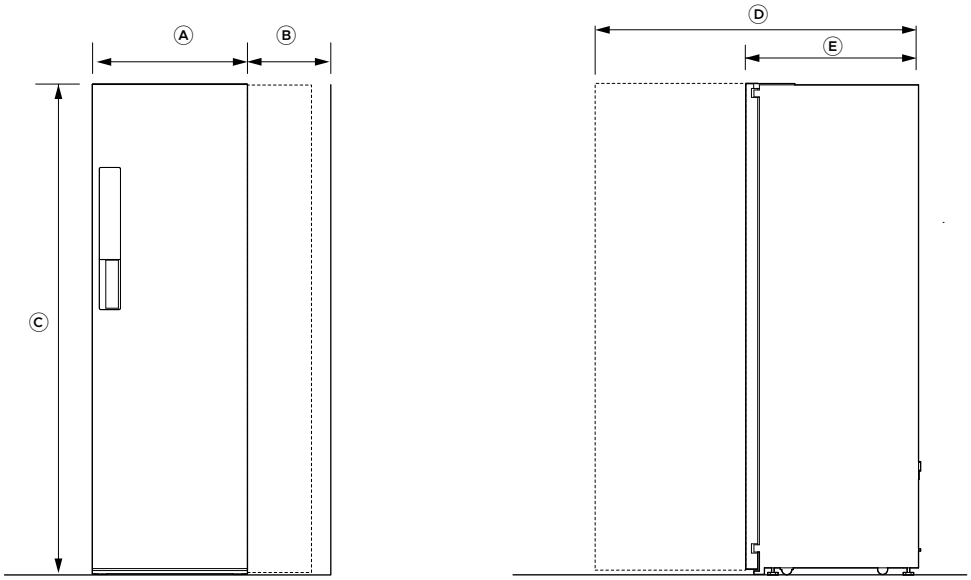

Door opening clearance	mm
Fabric Care Cabinet	
FC1260HG1, FC1260H1	
Ⓐ Fabric Care Cabinet width	600
Ⓑ Door clearance to adjacent wall	min 235
Door clearance to adjacent wall with doorpin	50
Ⓒ Fabric Care Cabinet height	1900
Ⓓ Depth with door open	1285
Ⓔ Fabric Care Cabinet depth	700

 © FISHER & PAYKEL LIMITED 2026

SERVICES

© FISHER & PAYKEL LIMITED 2026

LEFT-HAND SIDE

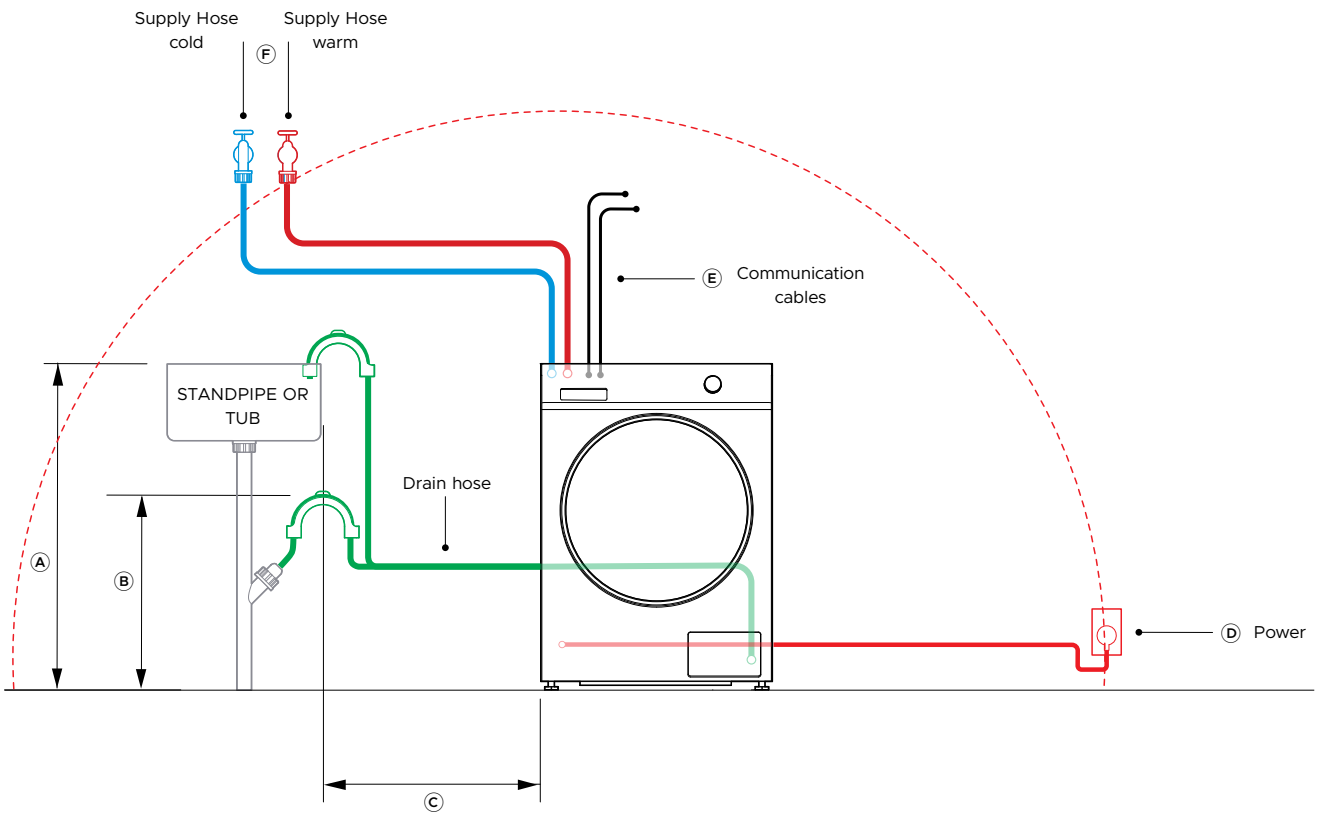

FRONT VIEW

Maximum Distance of Hose and Cords

Model nos:
Front Loader Washing Machine - WH1160HG1/WH1160H1

Product Dimensions	**mm**
Ⓐ Maximum standpipe or tub height	1000
With storage plinth	1200
Ⓑ Minimum standpipe or tub height	600
With storage plinth	800
Ⓒ Maximum distance to standpipe when located on the left	400
Maximum distance to standpipe when located on the right	1000
Ⓓ Maximum power cord length from power outlet	1400
Ⓔ Maximum communication cable length between products	1300

Specifications	
Electrical	
Supply	220 - 240 VAC, 50 Hz
Service	10 Amps
Outlet	3-prong grounding - type
Plumbing	
Supply	Hose set provided
Pressure	Max. 1MPa (150psi) Min. 50KPa (7psi); Min 6 litres/min

NOTES:

Connections may be located in an adjacent cabinet to either side of the washer Ensure power will remain accessible following install to allow access for any future product maintenance.

A washer and dryer without separate cold-water inlets shall be no more than 900mm apart in order to use steam cycles on the dryer.

Multiple product installation requires the design of water and power outlets according to local regulations.

IMPORTANT NOTE: Throughout this guide, dimensions may vary by +/-2mm. Please read the Installation Guide for detailed information on installing the product. For full installation instructions visit fisherpaykel.com

 © FISHER & PAYKEL LIMITED 2026

LEFT-HAND SIDE

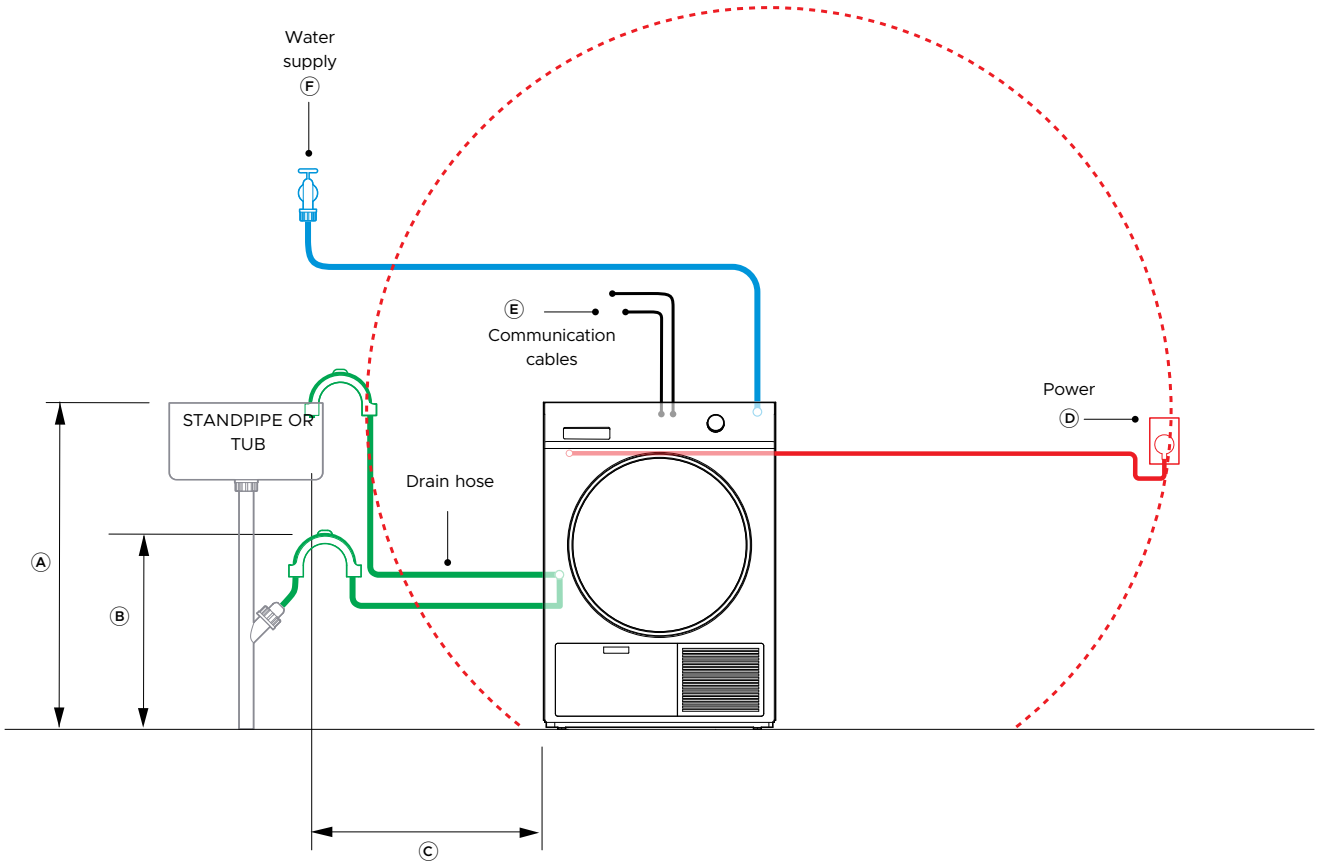

FRONT VIEW

Maximum Distance of Hose and Cords

Model nos:

Heat Pump Dryer with Display - DH9060HG1, DH9060H1

Product Dimensions	**mm**
Ⓐ Maximum standpipe or tub height	1000
with storage plinth	1200
Ⓑ Minimum standpipe or tub height	600
with storage plinth	800
Ⓒ Maximum distance to standpipe when located on the left	1000
Maximum distance to standpipe when located on the right	400
Ⓓ Maximum power cord length from power outlet	1400
Ⓔ Maximum communication cable length between products	1300
Ⓕ Maximum length water supply	600

Specifications	
Electrical	
Supply	220 - 240 VAC, 50 Hz
Service	10 Amps
Outlet	3-prong grounding-type
Plumbing	
Supply	Hose set provided
Pressure	Max. 1MPa (150psi) Min. 50KPa (7psi); Min 6 litres/min

NOTES:

Connections may be located in an adjacent cabinet to either side of dryer

A washer and dryer without separate cold-water inlets shall be no more than 900mm apart.

Ensure power will remain accessible following install to allow access for any future product maintenance.

Multiple product installation requires the design of water and power outlets according to local regulations.

IMPORTANT NOTE: Throughout this guide, dimensions may vary by +/-2mm. Please read the Installation Guide for detailed information on installing the product. For full installation instructions visit fisherpaykel.com

 © FISHER & PAYKEL LIMITED 2026

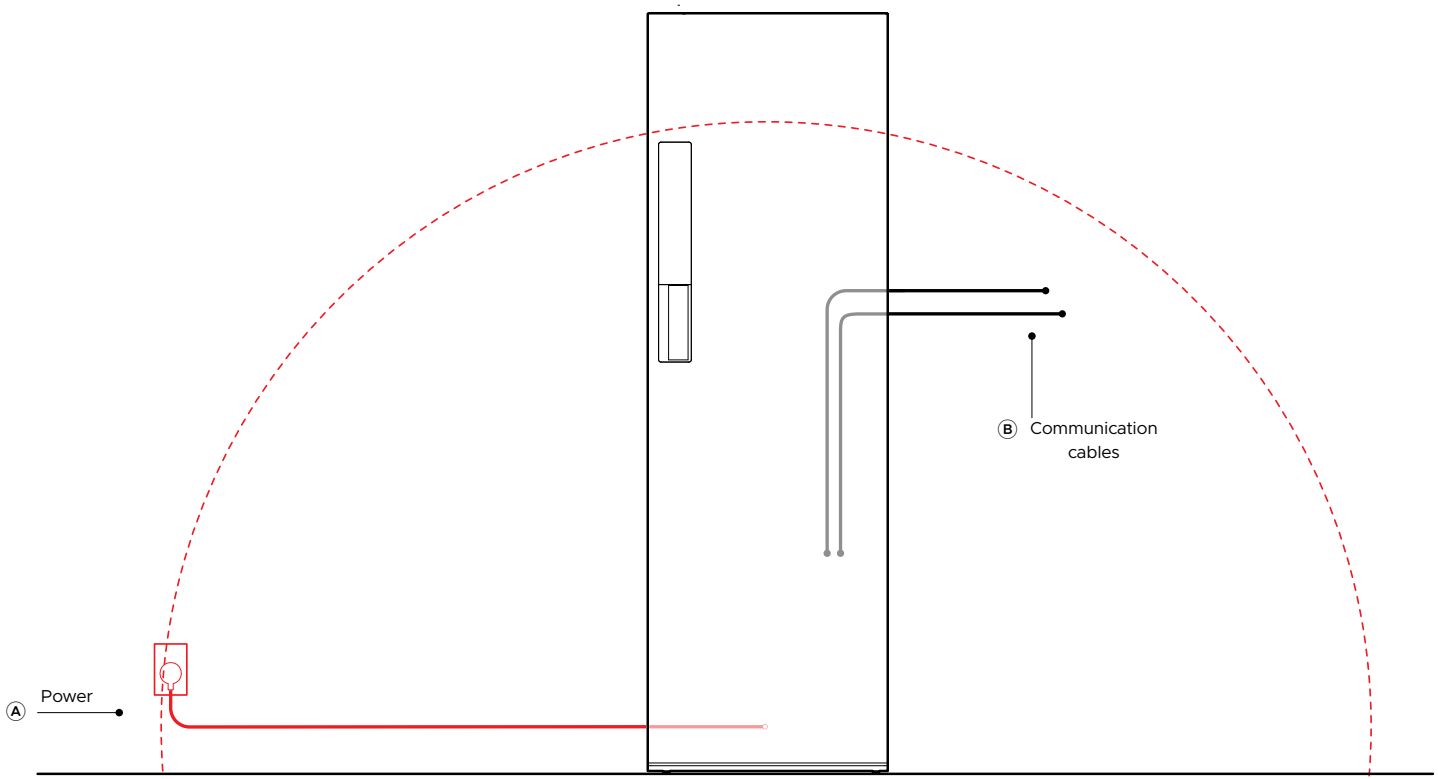

FRONT VIEW

Maximum Distance of Hose and Cords

Model nos:
Fabric Care Cabinet - FC1260HG1, FC1260H1

Product Dimensions	mm
Ⓐ Maximum power cord length from power outlet	1400
Ⓑ Maximum communication cable length between products	1300

Specifications	
Electrical	
Supply	220 - 240 VAC, 50 Hz
Service	10 Amps
Outlet	3-prong grounding-type

NOTES:
Connections may be located in an adjacent cabinet to either side of the cabinet

Ensure power will remain accessible following install to allow access for any future product maintenance.

Multiple product installation requires the design of water and power outlets according to local regulations.

IMPORTANT NOTE: Throughout this guide, dimensions may vary by +/-2mm. Please read the Installation Guide for detailed information on installing the product. For full installation instructions visit fisherpaykel.com

 © FISHER & PAYKEL LIMITED 2026

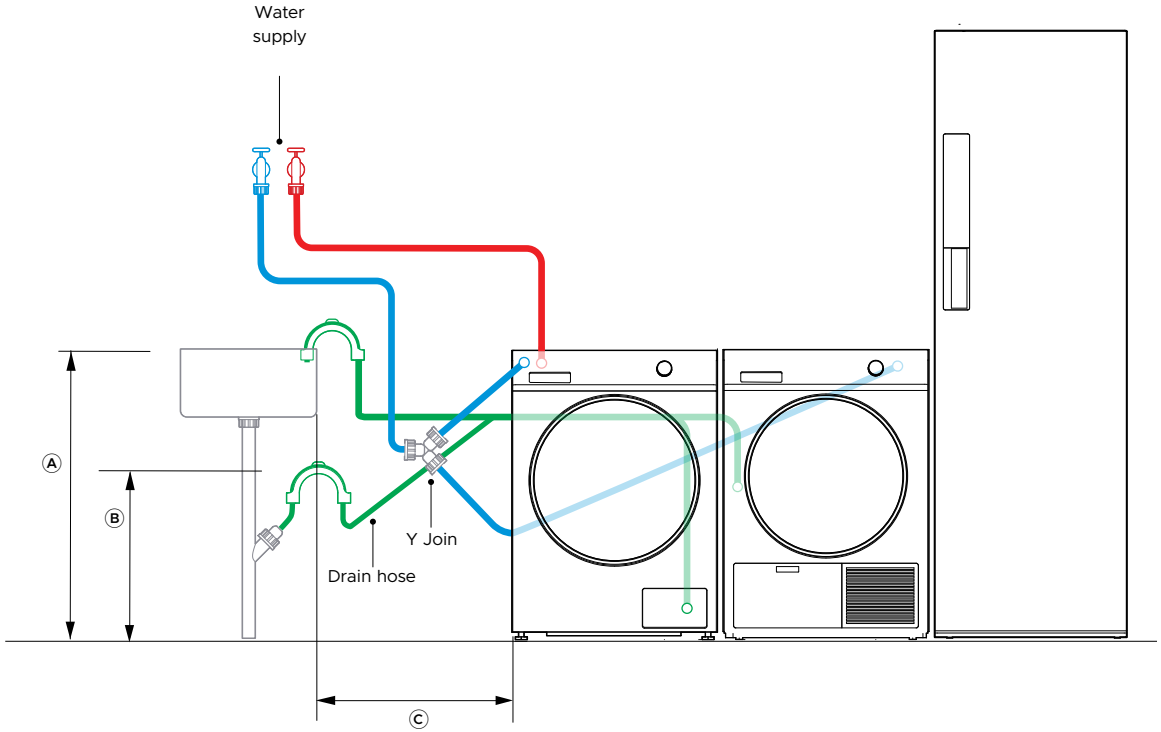

Maximum Distance of Water Supply and Drainage Hoses

Model nos:

Front Loader Washing Machine - WH1160HG1/WH1160H1
Heat Pump Dryer with Display - DH9060HG1, DH9060H1
Fabric Care Cabinet - FC1260HG1, FC1260H1

Product Dimensions	mm
Ⓐ Maximum standpipe or tub height	1000
with storage plinth	1200
Ⓑ Minimum standpipe or tub height	600
with storage plinth	800
Ⓒ Maximum distance to standpipe from washer and dryer	400

Specifications (per product)	
Electrical	
Supply	220 - 240 VAC, 50 Hz
Service	10 Amps
Outlet	3-prong grounding-type
Plumbing	
Supply	Hose set provided
Pressure	Max. 1MPa (150psi) Min. 50KPa (7psi); Min 6 litres/min

NOTES:
Connections may be located in an adjacent cabinet to either side of dryer

A washer and dryer without separate cold-water inlets shall be no more than 900mm apart.

Multiple product installation requires the design of water and power outlets according to local regulations.

IMPORTANT NOTE: Throughout this guide, dimensions may vary by +/-2mm. Please read the Installation Guide for detailed information on installing the product. For full installation instructions visit fisherpaykel.com

© FISHER & PAYKEL LIMITED 2026

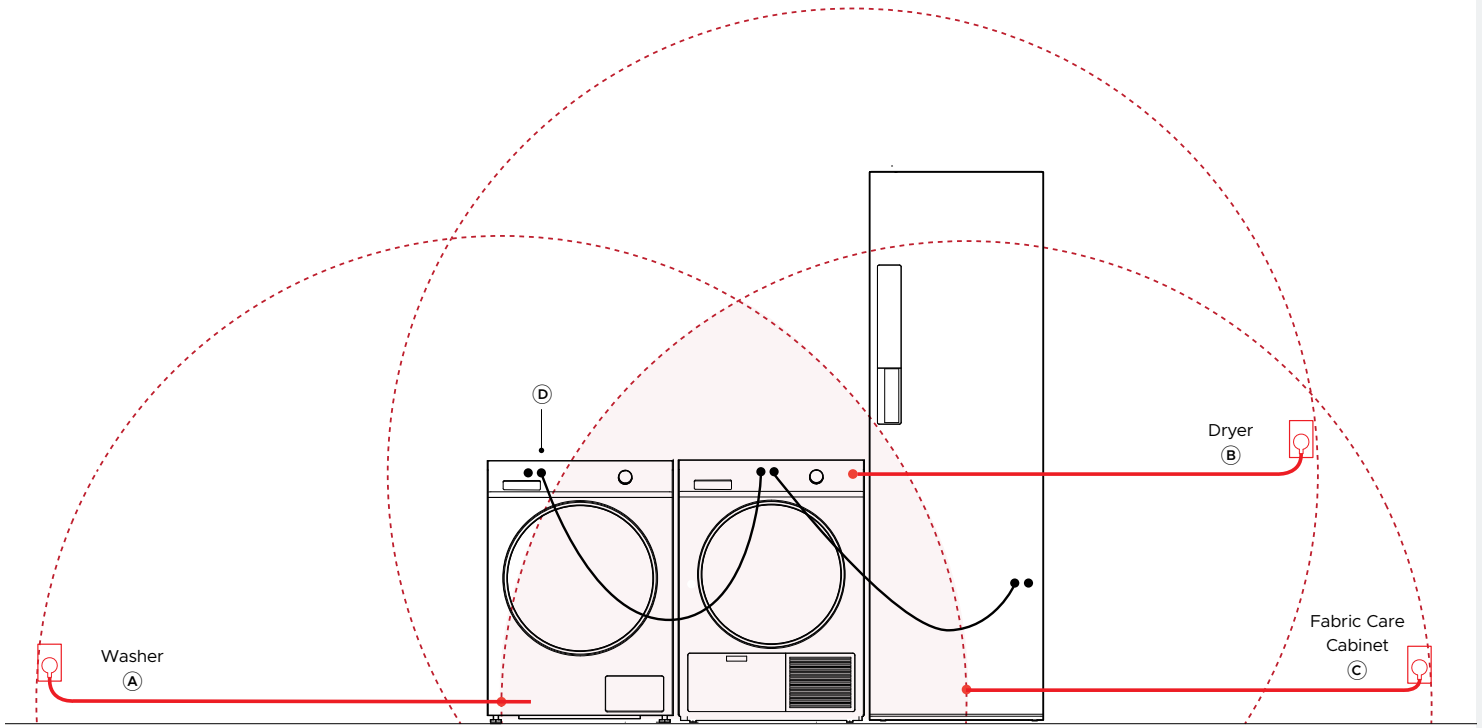

Maximum Distance of Power and Communication Cords

Model nos:

Front Loader Washing Machine - WH1160HG1/WH1160H1
Heat Pump Dryer with Display - DH9060HG1, DH9060H1
Fabric Care Cabinet - FC1260HG1, FC1260H1

Product Dimensions	mm
Ⓐ Maximum power cord length from power outlet	1400
Ⓑ Maximum power cord length from power outlet	1400
Ⓒ Maximum power cord length from power outlet	1400
Ⓓ Maximum communication cable length between products	1300

NOTES:

Connections may be located in an adjacent cabinet to either side of dryer
Ensure power will remain accessible following install to allow access for any future product maintenance.
Multiple product installation requires the design of water and power outlets according to local regulations.

IMPORTANT NOTE: Throughout this guide, dimensions may vary by +/-2mm. Please read the Installation Guide for detailed information on installing the product. For full installation instructions visit fisherpaykel.com

 © FISHER & PAYKEL LIMITED 2026

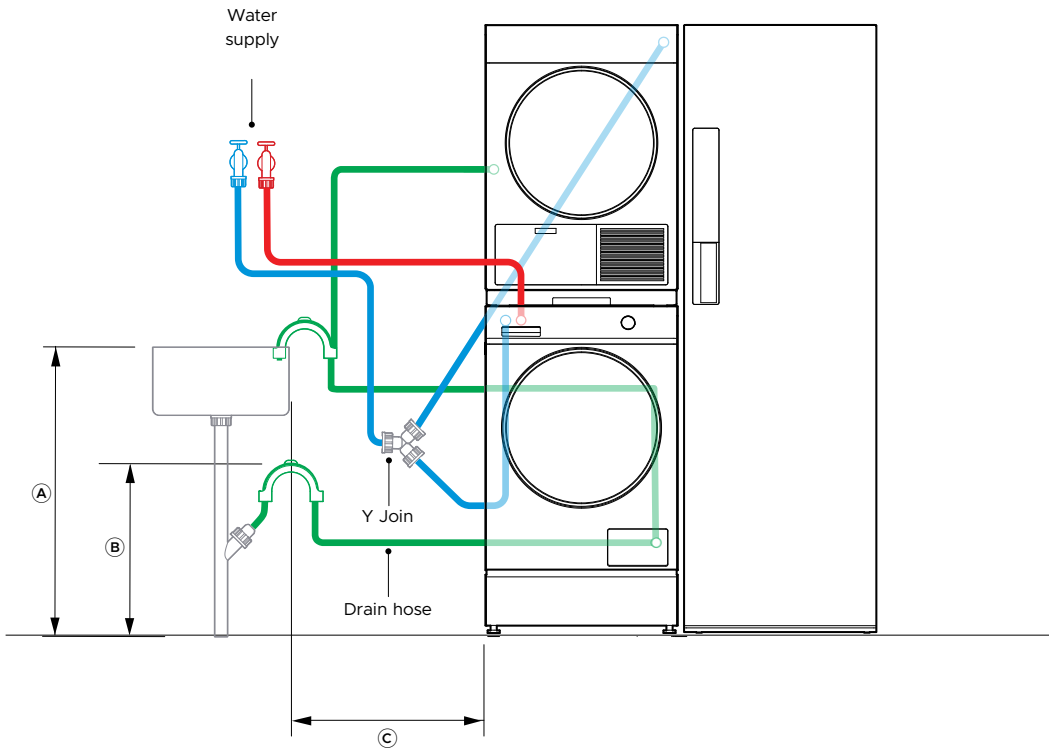

Maximum Distance of Water Supply and Drainage Hoses

Model nos:

Front Loader Washing Machine - WH1160HG1/WH1160H1
Heat Pump Dryer Display-free - DH9060HLG1, DH9060HL1
Fabric Care Cabinet - FC1260HG1, FC1260H1
Stacking Kit - 99373/428159
Storage Plinth - FM2060SG1/FM2060S1

Product Dimensions	mm
Ⓐ Maximum standpipe or tub height	1000
with storage plinth	1200
Ⓑ Minimum standpipe or tub height	600
with storage plinth	800
Ⓒ Maximum distance to standpipe from washer and dryer	400

Specifications (per product)	
Electrical	
Supply	220 - 240 VAC, 50 Hz
Service	10 Amps
Outlet	3-prong grounding-type
Plumbing	
Supply	Hose set provided
Pressure	Max. 1MPa (150psi) Min. 50KPa (7psi); Min 6 litres/min

NOTES:
Connections may be located in an adjacent cabinet to either side of dryer

A washer and dryer without separate cold-water inlets shall be no more than 900mm apart.

Multiple product installation requires the design of water and power outlets according to local regulations.

IMPORTANT NOTE: Throughout this guide, dimensions may vary by +/-2mm. Please read the Installation Guide for detailed information on installing the product. For full installation instructions visit fisherpaykel.com

© FISHER & PAYKEL LIMITED 2026

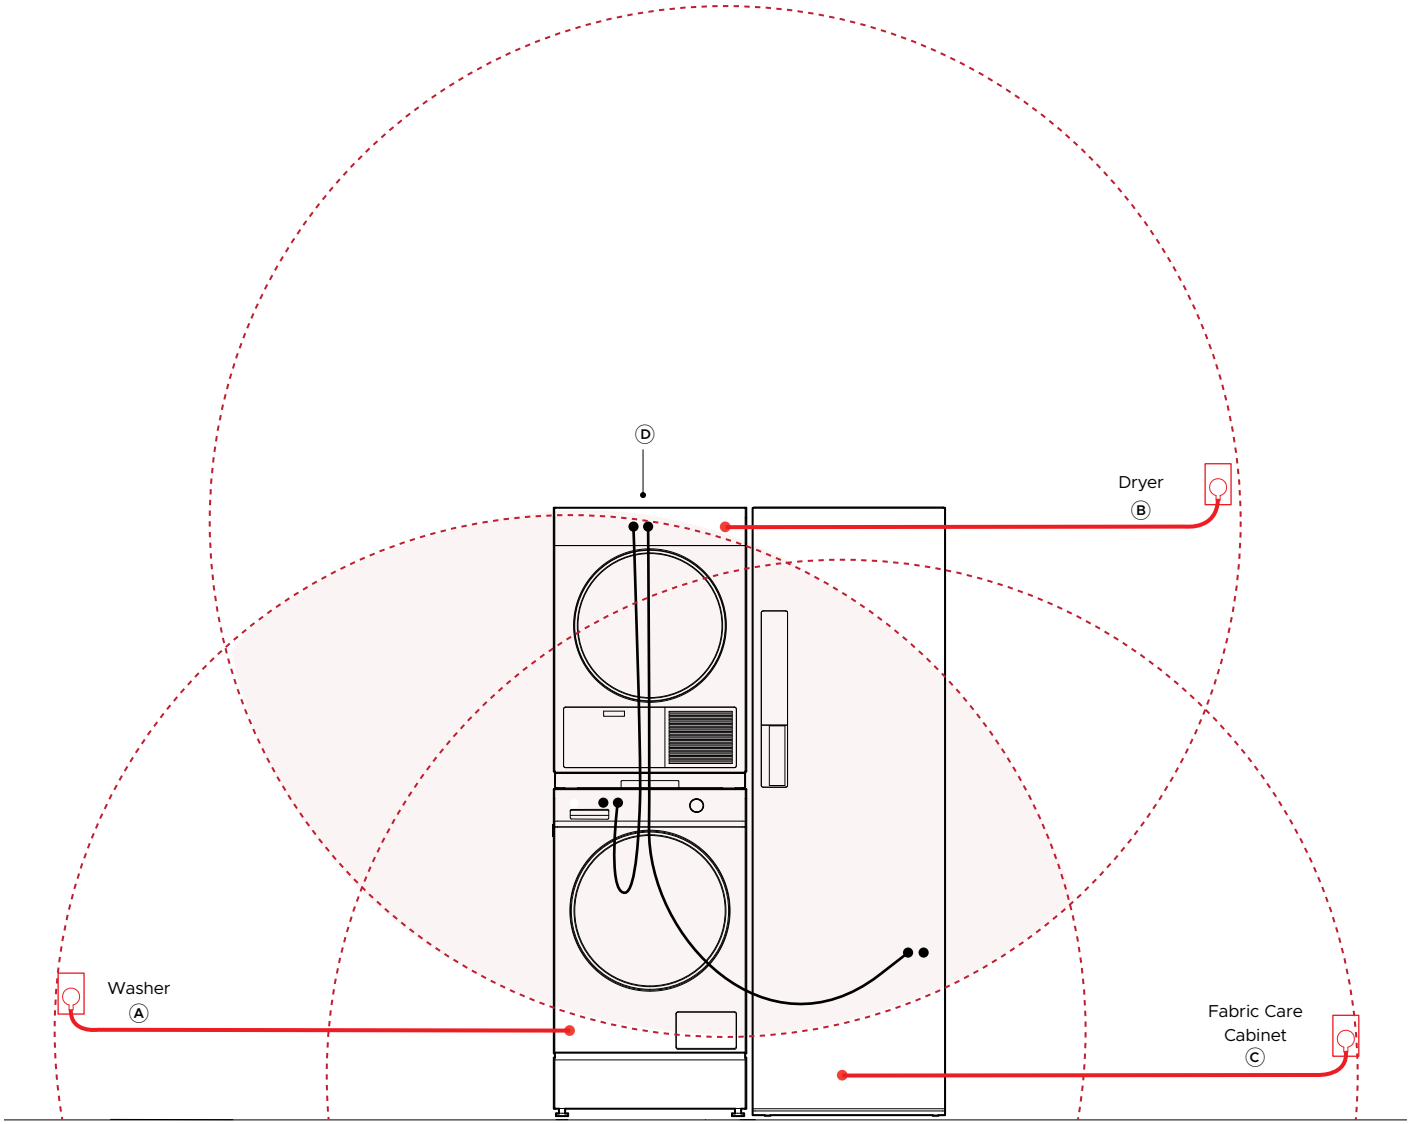

Maximum Distance of Power and Communication Cords

Model nos:

Front Loader Washing Machine - WH1160HG1/WH1160H1
Heat Pump Dryer Display-free - DH9060HLG1, DH9060HL1
Fabric Care Cabinet - FC1260HG1, FC1260H1
Stacking Kit -99373/428159
Storage Plinth - FM2060SG1/FM2060S1

Maximum Cord Length	mm
Ⓐ Washer	1400
Ⓑ Dryer	1400
Ⓒ Fabric Care Cabinet	1400
Ⓓ Communication Cables	1300

NOTES:

Connections may be located in an adjacent cabinet to either side of dryer
Ensure power will remain accessible following install to allow access for any future product maintenance.
Multiple product installation requires the design of water and power outlets according to local regulations.

IMPORTANT NOTE: Throughout this guide, dimensions may vary by +/-2mm. Please read the Installation Guide for detailed information on installing the product. For full installation instructions visit fisherpaykel.com

 © FISHER & PAYKEL LIMITED 2026

 © FISHER & PAYKEL LIMITED 2026