

---

# CONVECTION OVEN INSTALLATION CONSIDERATIONS

---

|                                       |   |
|---------------------------------------|---|
| Accessing your product specifications | 3 |
| Electrical connection                 | 4 |
| Cabinetry trim                        | 5 |

**FISHER & PAYKEL**

NZ AU SG

**MINIMAL**

OB60SAMPUNB5, OB60SAMPUNG5, OB60SAMPUB5, OB60SAMPUG5,  
OB60SAMPTB5, OB60SAMPTG5, OB60SAMTB5, OB60SAMTG5

**CONTEMPORARY**



OB60SACPUDX5, OB60SACPTDX5, OB60SACTDX5, OB60SACPGX5,  
OB60SACPGB5, OB60SACGX5, OB60SACGB5

## ACCESSING YOUR PRODUCT SPECIFICATIONS



For full product, cabinetry and service specifications, refer to the Planning Guide. To access the Planning Guide, scan the QR code or visit [fisherpaykel.com/specify](https://fisherpaykel.com/specify). Search by appliance type, product name or model code.

### MINIMAL & CONTEMPORARY MODELS

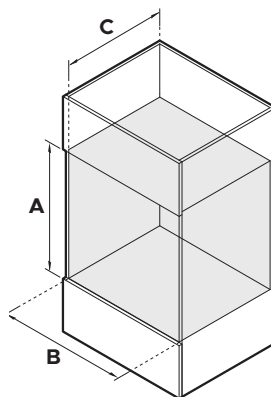


| PRODUCT DIMENSIONS               | mm  |
|----------------------------------|-----|
| <b>A</b> Overall height          | 598 |
| <b>B</b> Overall width           | 596 |
| <b>C</b> Chassis height          | 575 |
| <b>D</b> Chassis width           | 556 |
| <b>E</b> Chassis depth           | 545 |
| <b>F</b> Control panel thickness | 20  |

| CAVITY DIMENSIONS                        | mm  |
|--|-----|
| <b>A</b> Minimum inside height of cavity | 580 |
| <b>B</b> Minimum inside width of cavity  | 560 |
| <b>C</b> Minimum inside depth of cavity  | 550 |
| Recommended cabinet width                | 600 |

# ELECTRICAL CONNECTION

| <b>SPECIFICATIONS</b> | <b>OB60 MODELS</b>       |
|-----------------------|--------------------------|
| Dedicated Circuit (A) | 16                       |
| Rated Power (W)       | 2800 - 3300              |
| Supply (Hz)           | 50-60                    |
| Voltage (V)           | 220 - 240                |
| Connection            | Hard-wired<br>min 1500mm |

## CABENTRY TRIM

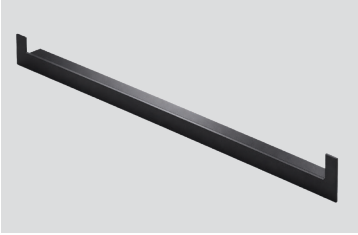

### **Some models only**

For light cabinetry, the supplied trim can be used to improve the overall finish. Refer to your installation guide for details.





