

HWFS95NW1, HWFS95NB1

9.5kg 500 Series Front Load Washing Machine

Haier



HWFS95NB1



HWFS95NW1

Height

850 - 865mm

Width

595mm

Depth

565mm

Weight (Packaged)

71kg

Weight (Product)

68kg

FEATURES

- 9.5kg capacity ideal for larger households
- 29-minute Ultra quick cycle for quick washes
- Speed Up function shortens most cycles
- Steam Refresh to reduce odours and creases
- 14 wash programs including Woolmark Black certified cycle
- Add a Garment function for mid-cycle flexibility
- Slimline depth fits existing cabinetry
- 5-star water and 5-star energy ratings
- Anti-Bacteria Treatment (ABT) in door gasket
- Drum Clean cycle helps maintain hygiene and performance

ACCESSORIES

- ASKSNB1 (Stacking Kit Dark)
- ASKSNW1 (Stacking Kit White)

The models shown in this Specification Guide (SG) may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This SG should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website haier.com

HDHPS80NW1, HDHPS80NB1

8kg 500 Series Heat Pump Dryer

Haier



HDHPS80NB1



HDHPS80NW1

Height

845 - 855mm

Width

595mm

Depth

586mm

Weight (Packaged)

55kg

Weight (Product)

51kg

FEATURES

- 8kg capacity with 8-star energy efficiency
- Heat Pump technology for gentle, low-temperature drying
- Reduces running costs by up to 60%* compared to vented models
- Ultra Reverse Drum reduces tangling and improves drying evenness
- Slim 586mm depth with no venting required
- Allergy Care cycle helps remove common allergens
- Woolmark Blue certified cycle for handwash woollens
- Rack Dry option for shoes and delicates
- Drum light and modern touch controls
- Available in Dark or White to match Haier 500 Series Washers (HWFS95NW1, HWFS95NB1)

**Based on kWh consumption displayed in energy labels, electricity price of \$0.25 per kWh, and compared to Haier Vented Dryer HDV70AWW1.


ACCESSORIES

- ASKSNB1 (Stacking Kit Dark)
- ASKSNW1 (Stacking Kit White)
- ASKSTW1 (stack with HTDWF90CTW1 only)

The models shown in this Specification Guide (SG) may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This SG should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website haier.com

Product Overview

PRODUCT DIMENSIONS

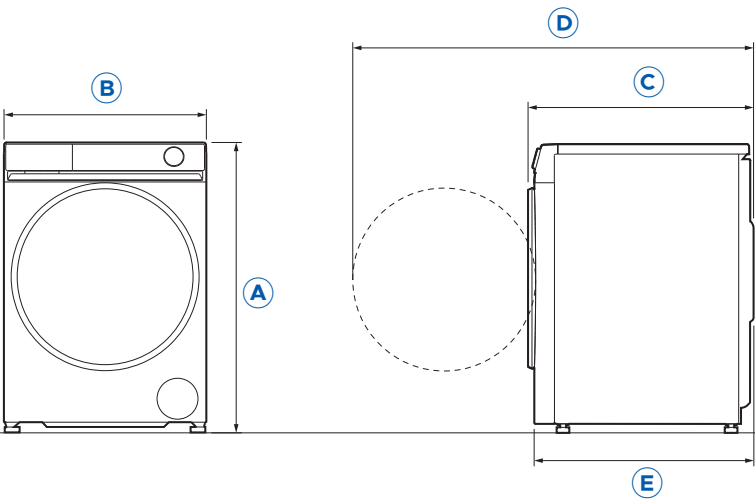


FRONT VIEW

SIDE VIEW


	mm
A Overall height	850 - 865
B Overall width	595
C Overall depth (door closed)	565
D Overall depth (door open)	1051
E Overall depth (excluding door)	541

CAVITY DIMENSIONS

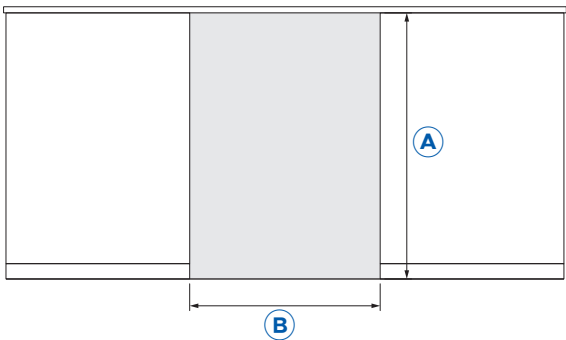

FRONT VIEW

	mm
A Minimum height of cavity	875
B Minimum width of cavity	635
C Minimum clearance at back of cavity	30
D Minimum depth of cavity (excluding product door)	581
E Minimum clearance at front of cavity for in cupboard	30
F Minimum depth of cavity in cupboard	635

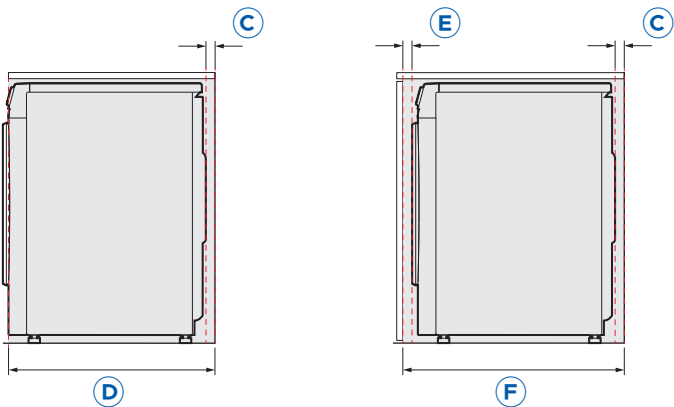

SIDE VIEW

SIDE VIEW - CUPBOARD

Note: If installing behind a cabinetry door, it must be hinged on the same side as the washing machine. There must be a minimum clearance of 30mm from the front of the washing machine door to the internal face of the cabinetry door for the product to operate safely.


The enclosed space must be provided with sufficient ventilation to meet local building code requirements or the door must be open while the product is operating.

SERVICES

- Supply 220-240 V, 50 Hz
- Service 10 A
- Connection Flex cord with plug

Product Overview

PRODUCT DIMENSIONS

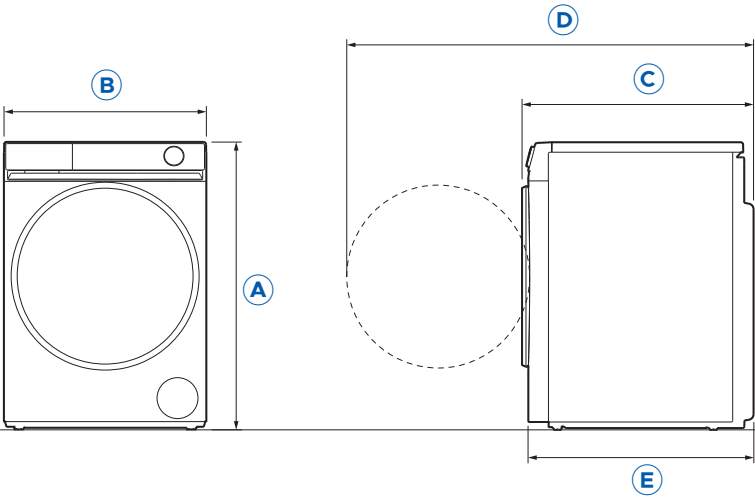


FRONT VIEW

SIDE VIEW


	mm
A Overall height	845 - 855
B Overall width	595
C Overall depth (door closed)	586
D Overall depth (door open)	1068
E Overall depth (excluding door)	558

CAVITY DIMENSIONS

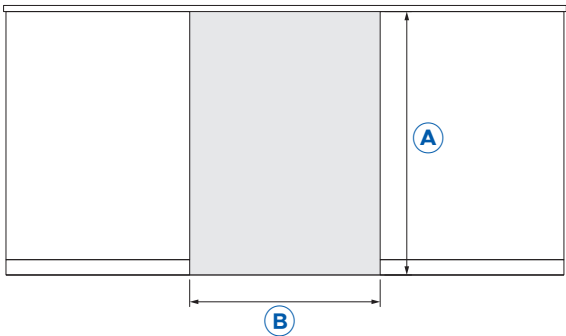

FRONT VIEW

	mm
A Minimum height of cavity	875
B Minimum width of cavity	635
C Minimum clearance at back of cavity	30
D Minimum depth of cavity (excluding product door)	598
E Minimum clearance at front of cavity for in cupboard	40
F Minimum depth of cavity in cupboard	666

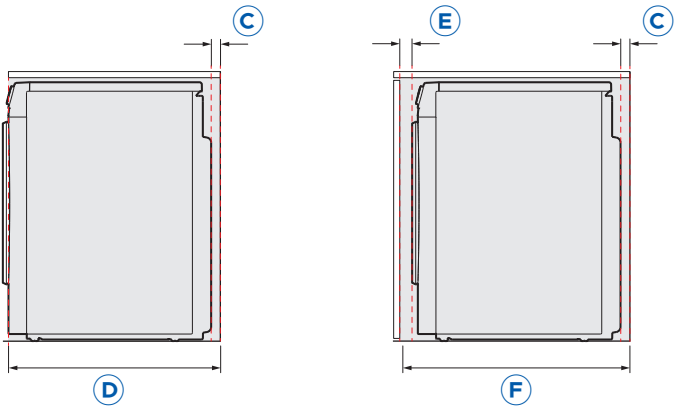

SIDE VIEW

SIDE VIEW - CUPBOARD

Note: If installing behind a cabinetry door, it must be hinged on the same side as the dryer. There must be a minimum clearance of 40mm from the front of the dryer door to the internal face of the cabinetry door for the product to operate safely.


The enclosed space must be provided with sufficient ventilation to meet local building code requirements or the door must be open while the product is operating.

SERVICES

- Supply 220-240 V, 50 Hz
- Service 10 A
- Connection Flex cord with plug


Product Overview

PRODUCT DIMENSIONS

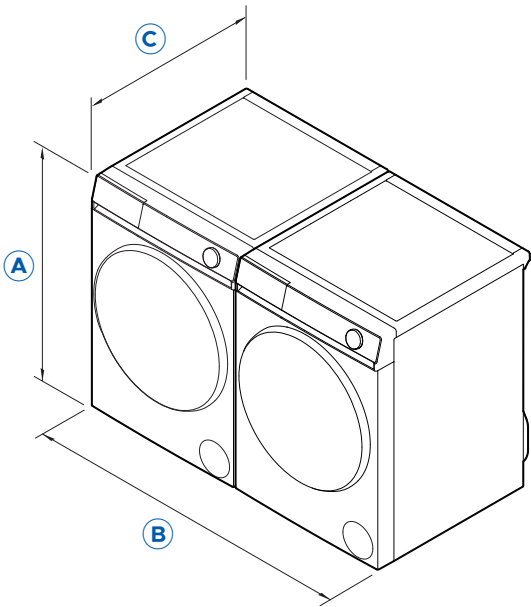

		mm
A	Minimum height	850
B	Overall width	1207
C	Overall depth (door closed)	586

CAVITY DIMENSIONS

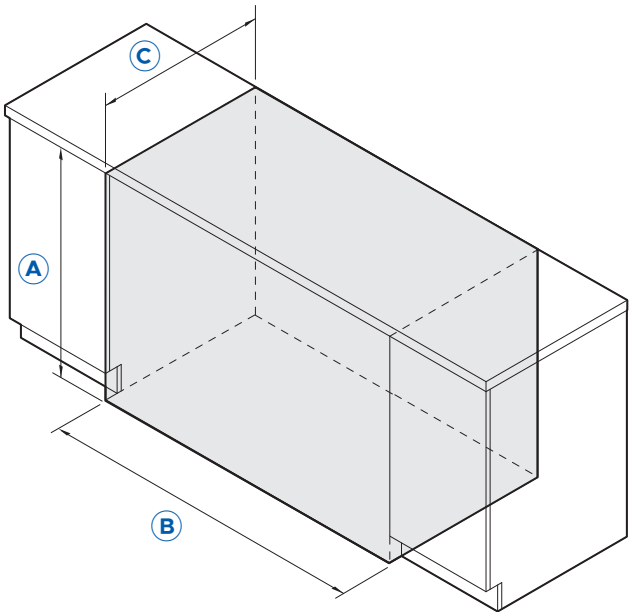


		mm
A	Minimum height of cavity	875
B	Minimum width of cavity	1248
C	Minimum depth of cavity (excluding product door)	598
	Minimum depth of cavity in cupboard	666

Note: For more details on ventilation and behind cupboard installation requirements, refer to the individual product overview pages.

Product Overview

PRODUCT DIMENSIONS

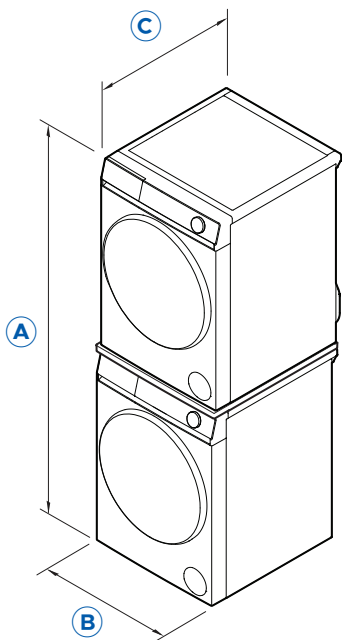


		mm
A	Minimum height*	1696
B	Overall width	595
C	Overall depth (door closed)	603

*Including stacking kit height (sold separately).

CAVITY DIMENSIONS

The stacking kit solution for this dryer requires a wall anchor and is not currently suitable for a cabinet installation.

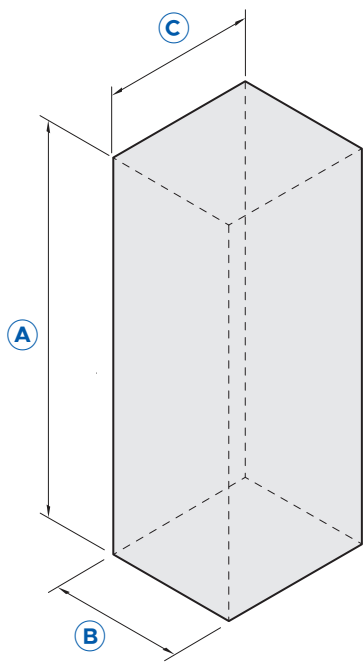

		mm
A	Minimum height of cavity	1721
B	Minimum width of cavity	635
C	Minimum depth of cavity (excluding product door)	619

The models shown in this Specification Guide (SG) may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This SG should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website haier.com