

HWF80ECW1

8kg 300 Series Front Loader Washer

Haier



HWF80ECW1

Height

850-865mm

Width

595mm

Depth

507mm

Weight (Packaged)

63kg

Weight (Product)

60kg

FEATURES

- Slimline 507mm cabinet depth brings an 8kg drum to smaller laundries.
- Express 15 washes a small load in just 15 minutes.
- Add a Garment lets you pause the cycle to add forgotten items.
- Extra Rinse adds a second rinse for towels, bedding and absorbent fabrics.
- Refresh uses steam to help reduce odours and creases with minimal water and energy.
- Eleven programmes include Wool, Delicate, Bedding, Cotton, Synthetics and Mixed.
- Auto Load Sensing matches water use and cycle length to the load.
- Favourite saves the cycle settings you use most.
- Anti-Bacterial Treatment helps keep the door-gasket area hygienic.
- Drum Clean uses hot water and a high-speed spin to help clear detergent residue.

ACCESSORIES

- ASKSNW2 (Stacking Kit White)

The models shown in this Specification Guide (SG) may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This SG should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website haier.com

HWF10ECW1, HWF10ECB1

10kg 300 Series Front Loader Washer

Haier



HWF10ECW1



HWF10ECB1

Height

850-865mm

Width

595mm

Depth

565mm

Weight (Packaged)

71kg

Weight (Product)

68kg

FEATURES

- Spacious 10kg capacity makes room for the weekly household wash.
- Slimline 565mm cabinet depth fits comfortably into existing laundry spaces.
- Express 15 washes a small load in just 15 minutes.
- Add a Garment lets you pause the cycle to add forgotten items.
- Extra Rinse adds a second rinse for towels, bedding and absorbent fabrics.
- Refresh uses steam to help reduce odours and creases with minimal water and energy.
- Eleven programmes include Wool, Delicate, Bedding, Cotton, Synthetics and Mixed.
- Auto Load Sensing matches water use and cycle length to the load.
- Favourite saves the cycle settings you use most.
- Anti-Bacterial Treatment and Drum Clean help care for the washer between washes.

ACCESSORIES

- ASKSNB2 (Stacking Kit Dark)
- ASKSNW2 (Stacking Kit White)

The models shown in this Specification Guide (SG) may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This SG should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website haier.com

HDHP70LCW2, HDHP70LCB2

7kg 300 Series Heat Pump Dryer

Haier



HDHP70LCW2



HDHP70LCB2

Height

850mm

Width

595mm

Depth

590mm

Weight (Packaged)

45kg

Weight (Product)

42kg

FEATURES

- Heat pump technology dries gently while using 59% less energy consumption than a 2-star vented dryer*
- 7kg capacity is suited to everyday household loads.
- Slimline 590mm cabinet depth fits comfortably into existing laundry spaces.
- Sensor Drying helps prevent over-drying by monitoring moisture levels.
- Express 30 dries a small load in 30 minutes.
- Eleven cycles include Allergy Care, Bedding, Delicate, Shirts, Towels and Wool.
- Sanitise dry option eliminates more than 99.99% of bacteria.**
- A removable water tank gives you flexible installation without external venting.
- Anti-crease function helps reduce creases when clothes cannot be removed straight away.
- Delay Start lets you plan drying to finish when it suits you.

*Based on a 2-star energy rated vented dryer with 315kWh annual consumption, as per energy label tests.

** Independently tested to eliminate greater than 99.99% of staphylococcus aureus and E. coli using the Cotton cycle + Sanitise wash option


ACCESSORIES

- ASKSNB2 (Stacking Kit Dark)
- ASKSNW2 (Stacking Kit White)

The models shown in this Specification Guide (SG) may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This SG should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website haier.com


Product Overview

PRODUCT DIMENSIONS

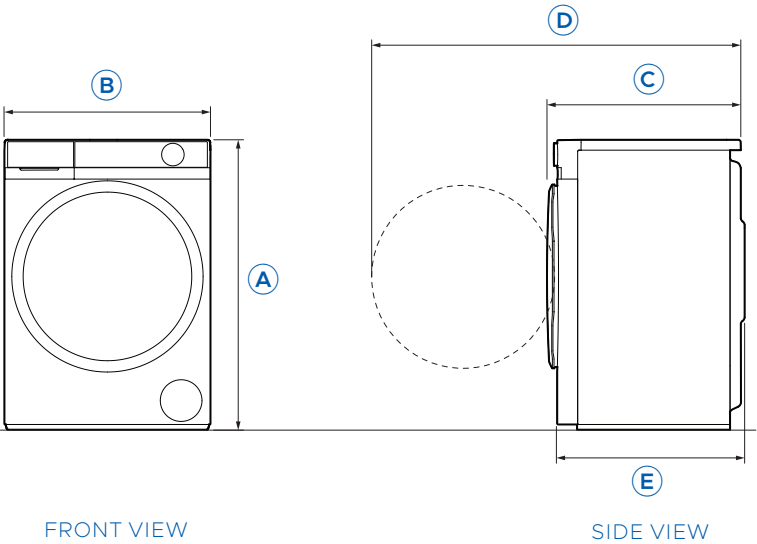

		mm
A	Overall height	850 - 865
B	Overall width	595
C	Overall depth (door closed)	507
D	Overall depth (door open)	992

CAVITY DIMENSIONS

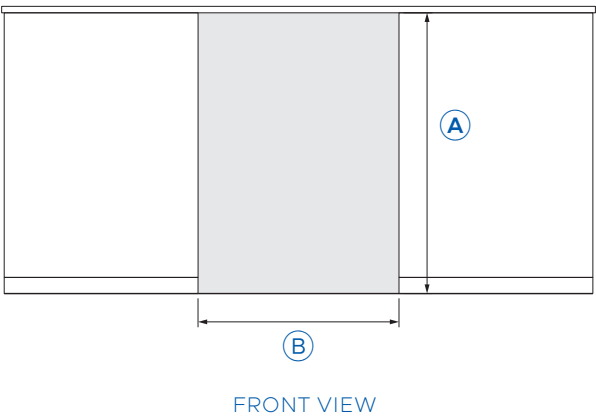

		mm
A	Minimum height of cavity	865
B	Minimum width of cavity	622
C	Minimum clearance at back of cavity	30
D	Minimum depth of cavity (excluding product door)	523
E	Minimum clearance at front of cavity for in cupboard	30
F	Minimum depth of cavity in cupboard	577

Note: If installing behind a cabinetry door, it must be hinged on the same side as the washing machine. There must be a minimum clearance of 30mm from the front of the washing machine door to the internal face of the cabinetry door for the product to operate safely.


The enclosed space must be provided with sufficient ventilation to meet local building code requirements or the door must be open while the product is operating.

SERVICES

- Supply 220 - 240 V, 50 Hz
- Service 10 A
- Connection Flex cord with plug


Product Overview

PRODUCT DIMENSIONS

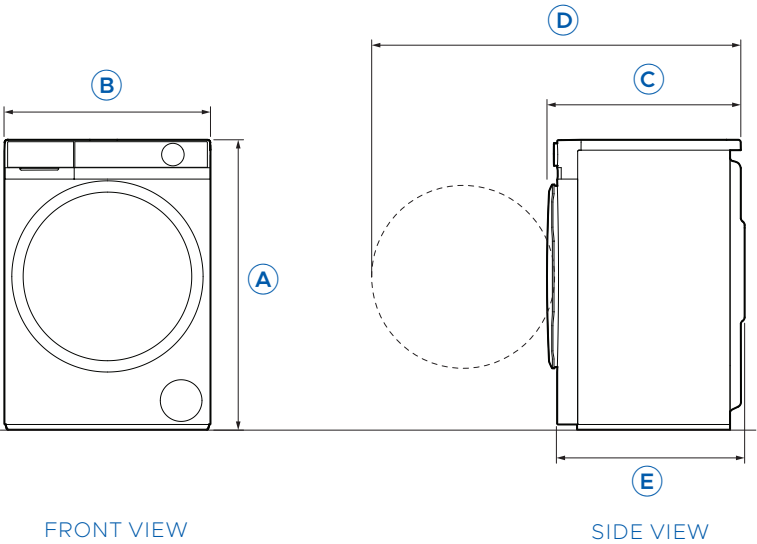

		mm
A	Overall height	850 - 865
B	Overall width	595
C	Overall depth (door closed)	565
D	Overall depth (door open)	1051

CAVITY DIMENSIONS

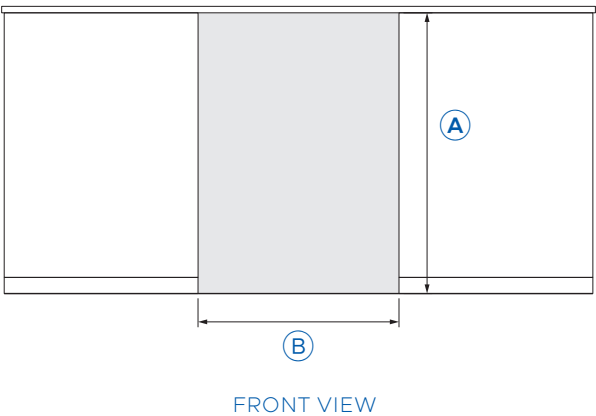

		mm
A	Minimum height of cavity	875
B	Minimum width of cavity	635
C	Minimum clearance at back of cavity	30
D	Minimum depth of cavity (excluding product door)	575
E	Minimum clearance at front of cavity for in cupboard	30
F	Minimum depth of cavity in cupboard	625

Note: If installing behind a cabinetry door, it must be hinged on the same side as the washing machine. There must be a minimum clearance of 30mm from the front of the washing machine door to the internal face of the cabinetry door for the product to operate safely.

The enclosed space must be provided with sufficient ventilation to meet local building code requirements or the door must be open while the product is operating.


SERVICES

- Supply 220 -240 V, 50 Hz
- Service 10 A
- Connection Flex cord with plug

The models shown in this Specification Guide (SG) may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This SG should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website haier.com


Product Overview

PRODUCT DIMENSIONS

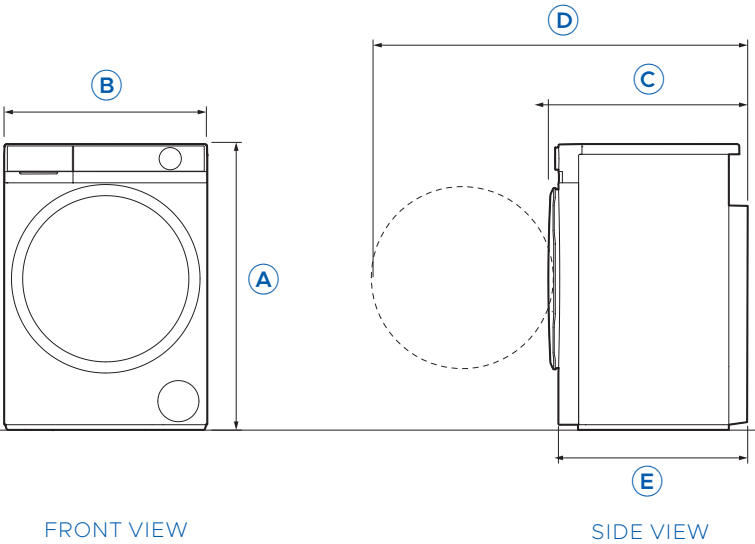

		mm
A	Overall height	850
B	Overall width	595
C	Overall depth (door closed)	590
D	Overall depth (door open)	1067

CAVITY DIMENSIONS

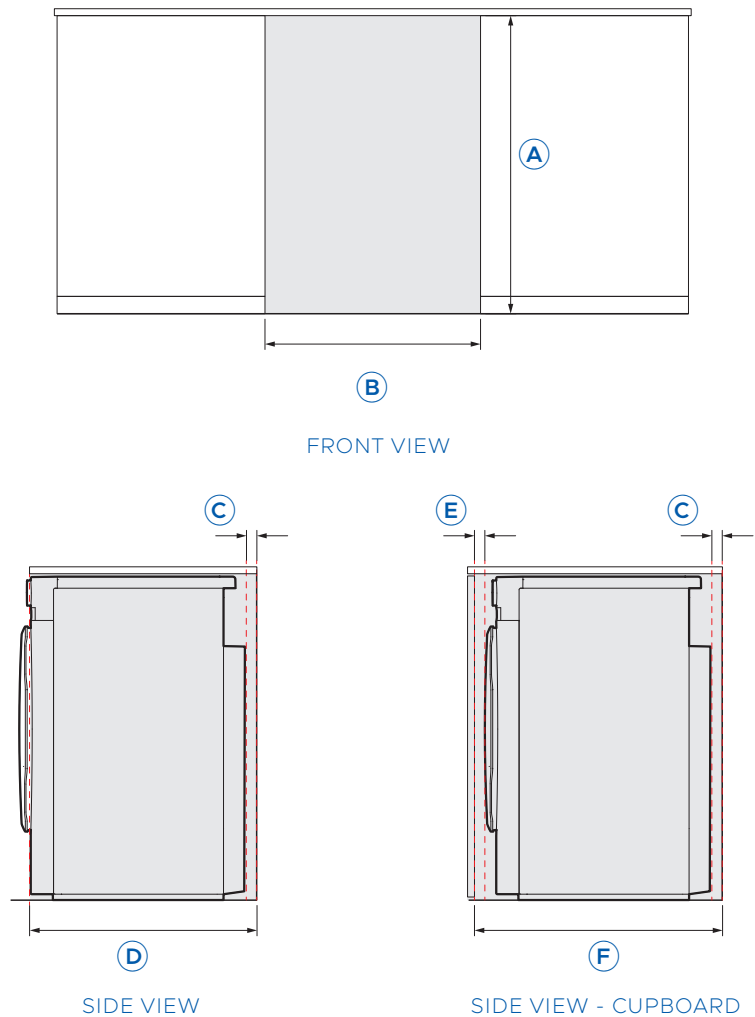

		mm
A	Minimum height of cavity	875
B	Minimum width of cavity	635
C	Minimum clearance at back of cavity	30
D	Minimum depth of cavity (excluding product door)	600
E	Minimum clearance at front of cavity for in cupboard	30
F	Minimum depth of cavity in cupboard	650

Note: If installing behind a cabinetry door, it must be hinged on the same side as the washing machine. There must be a minimum clearance of 30mm from the front of the dryer door to the internal face of the cabinetry door for the product to operate safely.

The enclosed space must be provided with sufficient ventilation to meet local building code requirements or the door must be open while the product is operating.


SERVICES

- Supply 220 - 240 V, 50 Hz
- Service 10 A
- Connection Flex cord with plug

The models shown in this Specification Guide (SG) may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This SG should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website haier.com


Product Overview

PRODUCT DIMENSIONS

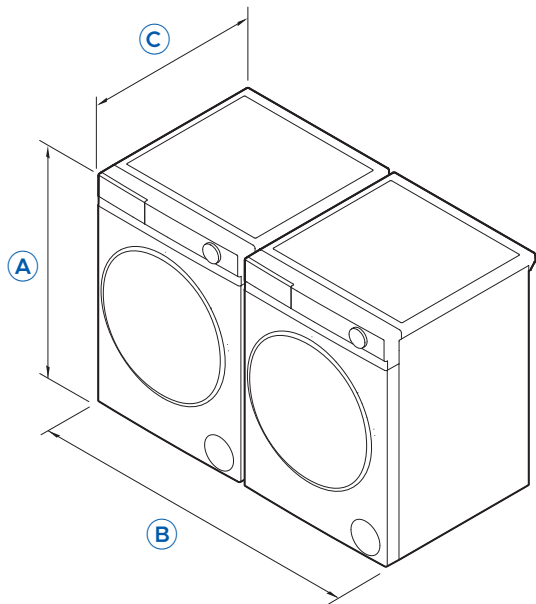

		mm
A	Overall height	850
B	Overall width	1210
C	Overall depth (HWF10EC with HDHP70LC)	590
	Overall depth (HWF80EC with HDHP70LC)	590

CAVITY DIMENSIONS

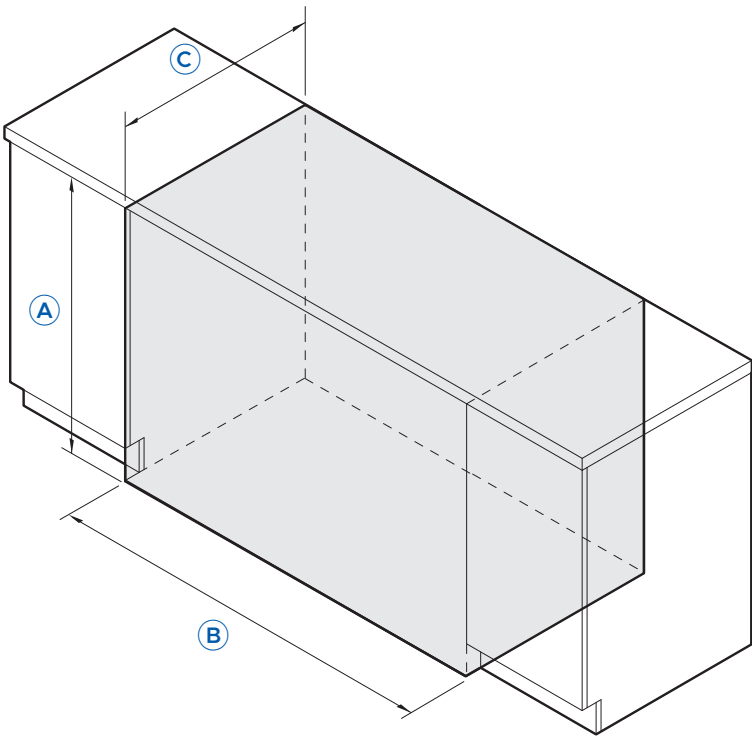


		mm
A	Minimum height of cavity	875
B	Minimum width of cavity	1250
C	Minimum depth of cavity (HWF10EC with HDHP70LC)	620
	Minimum depth of cavity (HWF80EC with HDHP70LC)	620

Note: For more details on ventilation and behind cupboard installation requirements, refer to the individual product overview pages.

Product Overview


PRODUCT DIMENSIONS

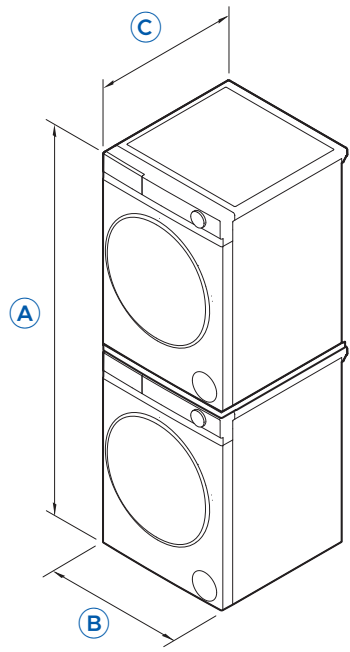

		mm
A	Minimum height*	1730
B	Overall width	595
C	Overall depth (door closed)	590

*Including stacking kit height (sold separately).

CAVITY DIMENSIONS

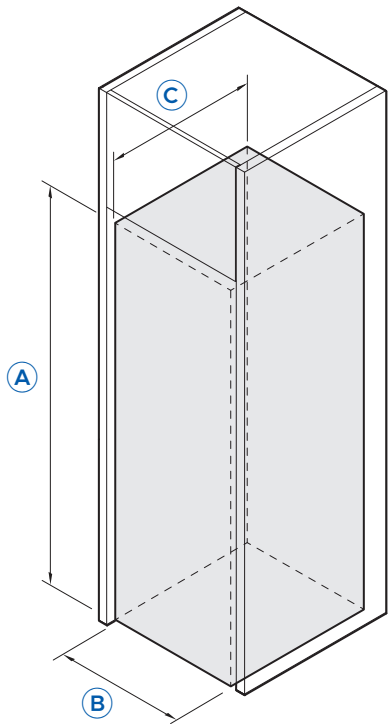

		mm
A	Minimum height of cavity	1765
B	Minimum width of cavity	635
C	Minimum depth of cavity (excluding product door)	620

The models shown in this Specification Guide (SG) may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This SG should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website haier.com