

**SERIES 9 DISHDRAWER™ DISHWASHERS**

---

# PLANNING GUIDE

---

**INTEGRATED SINGLE** | DD60S4HI2

**INTEGRATED TALL SINGLE** | DD60ST4HI2

**INTEGRATED DOUBLE** | DD60D4HI2

**CONTEMPORARY TALL SINGLE** | DD60ST4HDX2

**CONTEMPORARY DOUBLE** | DD60D4HDX2

**FISHER & PAYKEL**

INTRODUCTION

This comprehensive planning guide provides you with the framework and tools to achieve your desired design outcome with Fisher & Paykel appliances. In this guide, you will find a range of conceptual, detailed, and dimensional product information to bring your ideas to life and create spaces that truly reflect your vision.

SUPPORT

For additional design planning and installation support please contact the Fisher & Paykel design support team.  
**[designsupport@fisherpaykel.com](mailto:designsupport@fisherpaykel.com)**

NOTES

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Refer to our website [fisherpaykel.com](http://fisherpaykel.com) for the latest document version. Product specifications may vary from those shown.  
This Planning Guide should not be used as installation guidance for any product. Specific installation guidance will be available with the product on delivery and on our website.

CONTENTS

| CONCEPT DESIGN               | PAGE | DEVELOPED AND DETAILED DESIGN | PAGE | DEVELOPED AND DETAILED DESIGN | PAGE |
|------------------------------|------|-------------------------------|------|-------------------------------|------|
| <b>DESIGN CHOICES</b>        |      |                               |      |                               |      |
| Style overview               | 4    |                               |      |                               |      |
| Product overview             | 5    |                               |      |                               |      |
| <b>SPECIFICATION GUIDE</b>   |      |                               |      |                               |      |
| <b>SERIES 9 INTEGRATED</b>   |      |                               |      |                               |      |
| DD60S4HI2, DD60ST4HI2        | 7    |                               |      |                               |      |
| DD60S4HI2                    | 8    |                               |      |                               |      |
| DD60ST4HI2                   | 9    |                               |      |                               |      |
| DD60D4HI2                    |      |                               |      |                               |      |
| <b>SERIES 9 CONTEMPORARY</b> |      |                               |      |                               |      |
| DD60ST4HDX2                  | 10   |                               |      |                               |      |
|                              | 12   |                               |      |                               |      |
| DD60D4HDX2                   | 14   |                               |      |                               |      |

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](http://fisherpaykel.com)

## DESIGN CHOICES

**INTEGRATED DISHDRAWER™ DISHWASHER**



**CUSTOM PANEL READY OR ACCESSORY HANDLE OPTIONS**

With minimal installation gaps for a precise, flush fit, Integrated style DishDrawer™ Dishwashers blend effortlessly into surrounding cabinetry. Choose to fully conceal with custom panels or contrast with stainless steel finishes for a cohesive, considered kitchen design.

**CONTEMPORARY DISHDRAWER™ DISHWASHER**




**CONTEMPORARY PROUD HANDLE**

Defined by clean lines and timeless design cues, Contemporary style DishDrawer™ Dishwashers bring a sense of balance and refinement to the kitchen. The proud handle adds visual definition and a tactile element that enhances both the look and usability of the design.


The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://fisherpaykel.com)

INTEGRATED SINGLE

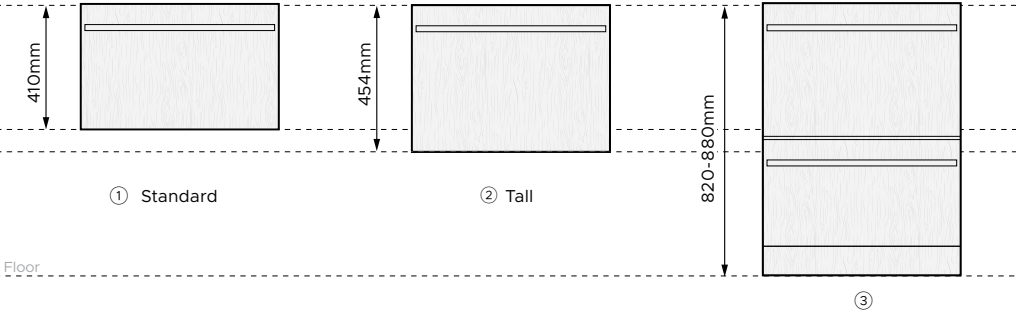

INTEGRATED DOUBLE

CONTEMPORARY TALL SINGLE

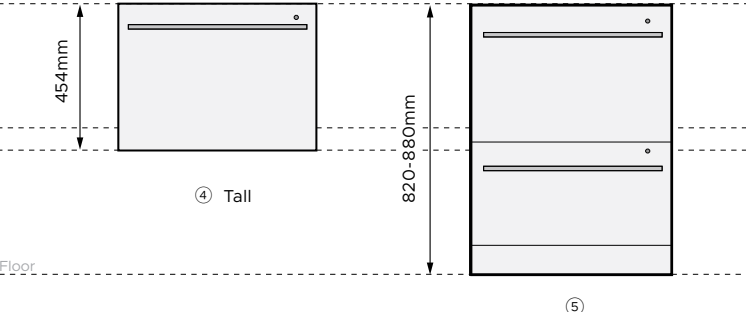

CONTEMPORARY DOUBLE

| STYLE                                                    | MODELS     | PANEL OPTIONS                                                                  | HANDLE OPTIONS                       |
|----------------------------------------------------------|------------|--------------------------------------------------------------------------------|--------------------------------------|
| ① Integrated Single DishDrawer™ Dishwasher Series 9      | DD60S4HI2  | Custom panel<br>Stainless Steel ADDD60SPX<br>Black Stainless Steel ADDD60SPB   | Custom handle,<br>Accessory handles* |
| ② Integrated Tall Single DishDrawer™ Dishwasher Series 9 | DD60ST4HI2 | Custom panel<br>Stainless Steel ADDD60STPX<br>Black Stainless Steel ADDD60STPB | Custom handle,<br>Accessory handles* |
| ③ Integrated Double DishDrawer™ Dishwasher Series 9      | DD60D4HI2  | Custom panel<br>Stainless Steel ADDD60DPX<br>Black Stainless Steel ADDD60DPB   | Custom handle,<br>Accessory handles* |

| STYLE                                                      | MODELS      | PANEL OPTIONS   | HANDLE OPTIONS            |
|------------------------------------------------------------|-------------|-----------------|---------------------------|
| ④ Contemporary Tall Single DishDrawer™ Dishwasher Series 9 | DD60ST4HDX2 | Stainless Steel | Contemporary Proud Handle |
| ⑤ Contemporary Double DishDrawer™ Dishwasher Series 9      | DD60D4HDX2  | Stainless Steel | Contemporary Proud Handle |

\*Contemporary Brushed Aluminium AHD7DDDW60S, Contemporary Brushed Aluminium Black AHD7DDDW60B, Minimal Grey Handle AHM1DDDW60G, Minimal Black Handle AHM1DDDW60B.

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://fisherpaykel.com)

## SPECIFICATION GUIDE



DD60S4HI2



DD60ST4HI2

**OVERVIEW**

The Series 9 Integrated Single DishDrawer™ Dishwasher is designed for true half-load dish care in a single drawer format. Panel-ready for seamless cabinetry integration, it supports flexible placement within the kitchen, while advanced wash technology and intuitive controls help support improved energy and water efficiency.

The Series 9 Integrated Tall Single DishDrawer™ Dishwasher extends the drawer format with added height to accommodate larger dishes and cookware. Designed for true half-load dish care, it supports flexible kitchen planning and bench-height installation, while advanced wash technology and intuitive controls help support improved energy and water efficiency.

**PRODUCTS**

**Series 9 Integrated Single DishDrawer™ Dishwasher**  
DD60S4HI2 (water softener model)

**Series 9 Integrated Tall Single DishDrawer™ Dishwasher**  
DD60ST4HI2 (water softener model)

**SERIES & STYLE**


Series 9  
Custom and accessory handle options

**FEATURES**

- 1 Single drawer designed for true half-load dish care.
- 2 Panel-ready design supports seamless integration within custom cabinetry.
- 3 Capacitive touch controls make everyday operation simple and intuitive.
- 4 **Tall:** Extra height fits larger dishes and cookware, including full-size dinner plates up to 310mm.  
**Standard:** Standard-height drawer fits full-size dinner plates and everyday cookware.
- 5 Designed to suit everyday dish loads without needing to fill a full dishwasher.
- 6 Designed for bench-height installation to support ergonomic access.
- 7 Advanced wash technology supports improved energy and water efficiency.
- 8 Versatile wash cycles and modifiers support varied dish care needs.
- 9 Fan-assisted drying helps leave dishes ready to use.
- 10 Can be paired with other DishDrawer™ models or installed on its own.
- 11 New Door installation adjustment system allows fast and accurate door alignment to the surrounding cabinetry. Designed to fit, perfect results, beautiful to use.


The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://fisherpaykel.com)

PRODUCT DIMENSIONS




ISO VIEW

CAVITY DIMENSIONS

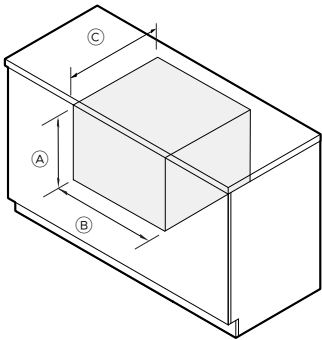

ISO VIEW

PLUMBING AND ELECTRICAL

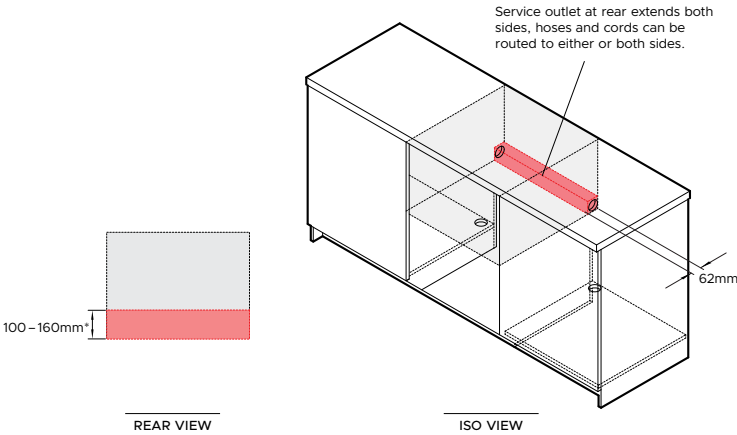

DD60S4HI2

| PRODUCT DIMENSIONS |                | mm  |
|--------------------|----------------|-----|
| Ⓐ                  | Overall height | 410 |
| Ⓑ                  | Overall width  | 599 |
| Ⓒ                  | Overall depth* | 553 |

\*Does not include drawer panel depth.


| CAVITY DIMENSIONS |               | mm      |
|-------------------|---------------|---------|
| Ⓐ                 | Cavity height | min 412 |
| Ⓑ                 | Cavity width  | min 600 |
| Ⓒ                 | Cavity depth  | min 575 |

| PRODUCT SPECIFICATIONS |                                                                        |
|------------------------|------------------------------------------------------------------------|
| WEIGHT                 | 33 kg                                                                  |
| PACKAGED WEIGHT        | 40 kg                                                                  |
| PACKAGED DIMENSIONS    | H 490 x W 654 x D 665mm                                                |
| ELECTRICAL             |                                                                        |
| Dedicated Service (A)  | 5                                                                      |
| Rated Power (W)        | 1200                                                                   |
| Supply (Hz)            | 50                                                                     |
| Voltage (V)            | 220-240                                                                |
| PLUMBING               |                                                                        |
| Supply                 | 3/4" (20mm) BSP connector water inlet hose                             |
| Pressure               | Min 0.1 Mpa (14.5psi), Max 1 Mpa (145psi) Cold water connection @ 20°C |

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://fisherpaykel.com)




PRODUCT DIMENSIONS




ISO VIEW

CAVITY DIMENSIONS

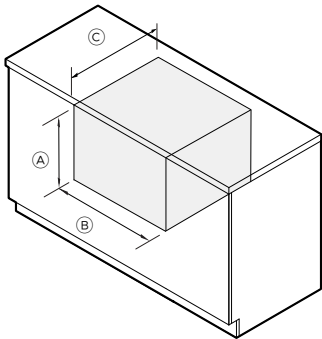

ISO VIEW

PLUMBING AND ELECTRICAL

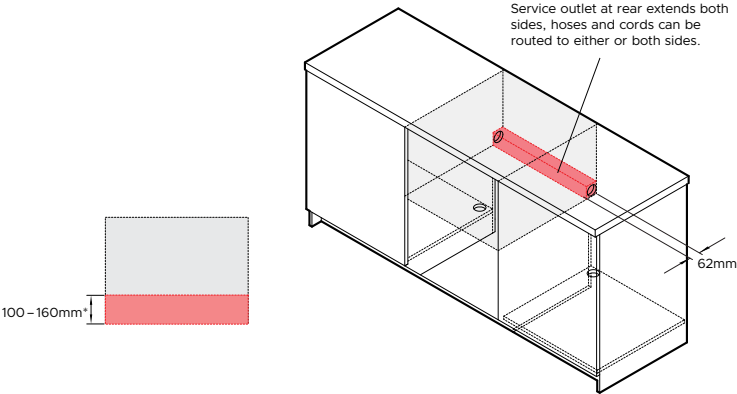

REAR VIEW

ISO VIEW

| PRODUCT DIMENSIONS |                | mm  |
|--------------------|----------------|-----|
| Ⓐ                  | Overall height | 454 |
| Ⓑ                  | Overall width  | 599 |
| Ⓒ                  | Overall depth* | 553 |

\*Does not include drawer panel depth.

| CAVITY DIMENSIONS |               | mm      |
|-------------------|---------------|---------|
| Ⓐ                 | Cavity height | min 457 |
| Ⓑ                 | Cavity width  | min 600 |
| Ⓒ                 | Cavity depth  | min 575 |

PRODUCT SPECIFICATIONS

|                       |                                                                        |
|-----------------------|------------------------------------------------------------------------|
| WEIGHT                | 33 kg                                                                  |
| PACKAGED WEIGHT       | 40 kg                                                                  |
| PACKAGED DIMENSIONS   | H 530 x W 654 x D 665mm                                                |
| ELECTRICAL            |                                                                        |
| Dedicated Service (A) | 5                                                                      |
| Rated Power (W)       | 1200                                                                   |
| Supply (Hz)           | 50                                                                     |
| Voltage (V)           | 220-240                                                                |
| PLUMBING              |                                                                        |
| Supply                | 3/4" (20mm) BSP connector water inlet hose                             |
| Pressure              | Min 0.1 Mpa (14.5psi), Max 1 Mpa (145psi) Cold water connection @ 20°C |

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://fisherpaykel.com)



DD60D4HI2

**OVERVIEW**

The Series 9 Integrated Double DishDrawer™ Dishwasher is designed for seamless integration within custom cabinetry. Independent drawers support flexible dish care, while advanced wash technology and intuitive controls help support improved energy and water efficiency.

**PRODUCTS**

**Series 9 Integrated Double DishDrawer™ Dishwasher**  
DD60D4HI2 (water softener model)

**SERIES & STYLE**


Series 9  
Custom and accessory handle options

**FEATURES**

- 1 Independent drawers can run separately or together.
- 2 Panel-ready design supports seamless integration within custom cabinetry.
- 3 Designed for bench-height installation to support ergonomic access.
- 4 Capacitive touch controls make everyday operation simple and intuitive.
- 5 Advanced wash technology supports improved energy and water efficiency.
- 6 Each drawer fits full-size dinner plates up to 280mm in diameter.
- 7 Adaptable racking accommodates a range of dishware and cookware.
- 8 Versatile wash cycles and modifiers support varied dish care needs.
- 9 Fan-assisted drying helps leave dishes ready to use.
- 10 SmartHQ™ connectivity offers remote control and notifications through the app.
- 11 New Door installation adjustment system allows fast and accurate door alignment to the surrounding cabinetry. Designed to fit, perfect results, beautiful to use.


The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://fisherpaykel.com)

PRODUCT DIMENSIONS

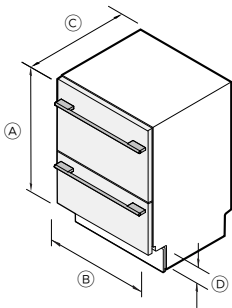


ISO VIEW

CAVITY DIMENSIONS

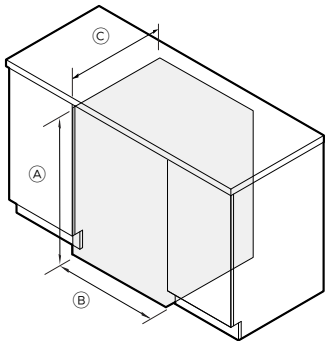


ISO VIEW

PLUMBING AND ELECTRICAL

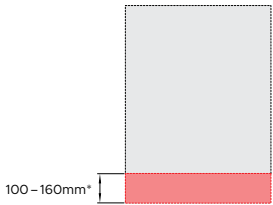

REAR VIEW

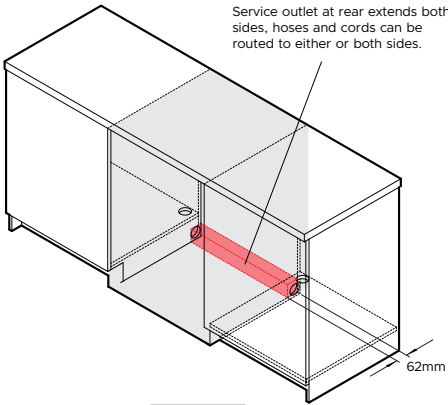

ISO VIEW

| PRODUCT DIMENSIONS |                                     | mm        |
|--------------------|-------------------------------------|-----------|
| Ⓐ                  | Overall height*                     | 820 - 880 |
| Ⓑ                  | Overall width                       | 599       |
| Ⓒ                  | Overall depth**                     | 553       |
| Ⓓ                  | Height from bottom of door to floor | 101 - 161 |

\*Depending on adjustment of levelling feet.  
\*\*Does not include drawer panel depth.  
Black toe kick supplied; custom toe kick optional

| CAVITY DIMENSIONS |                | mm        |
|-------------------|----------------|-----------|
| Ⓐ                 | Cavity height* | 822 - 882 |
| Ⓑ                 | Cavity width   | min 600   |
| Ⓒ                 | Cavity depth   | min 580   |

\*Depending on adjustment of levelling feet.

| PRODUCT SPECIFICATIONS |                                                                        |
|------------------------|------------------------------------------------------------------------|
| WEIGHT                 | 59 kg                                                                  |
| PACKAGED WEIGHT        | 67 kg                                                                  |
| PACKAGED DIMENSIONS    | H 890 x W 654 x D 665mm                                                |
| ELECTRICAL             |                                                                        |
| Dedicated Service (A)  | 10                                                                     |
| Rated Power (W)        | 2400                                                                   |
| Supply (Hz)            | 50                                                                     |
| Voltage (V)            | 220-240                                                                |
| Supply                 | 3/4" (20mm) BSP connector water inlet hose                             |
| Pressure               | Min 0.1 Mpa (14.5psi), Max 1 Mpa (145psi) Cold water connection @ 20°C |

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://fisherpaykel.com)



DD60ST4HDX2

**OVERVIEW**

The Series 9 Contemporary Tall Single DishDrawer™ Dishwasher extends the drawer format with added height to accommodate larger dishes and cookware. Designed for true half-load dish care, it supports flexible kitchen planning and bench-height installation, while advanced wash technology and intuitive controls help support improved energy and water efficiency.

**PRODUCTS**

**Series 9 Contemporary Tall Single DishDrawer™ Dishwasher**  
DD60ST4HDX2 (water softener model)

**SERIES & STYLE**


Series 9  
Contemporary Proud Handle

**FEATURES**

- 1 Single tall drawer designed for true half-load dish care.
- 2 Designed to suit everyday dish loads without needing to fill a full dishwasher.
- 3 Extra height fits larger dishes and cookware, including full-size dinner plates up to 310mm.
- 4 Capacitive touch controls make everyday operation simple and intuitive.
- 5 Designed for bench-height installation to support ergonomic access.
- 6 Advanced wash technology supports improved energy and water efficiency.
- 7 Versatile wash cycles and modifiers support varied dish care needs.
- 8 Fan-assisted drying helps leave dishes ready to use.
- 9 Contemporary stainless steel finish suits modern kitchen designs.
- 10 Can be paired with other DishDrawer™ models or installed on its own.


The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://fisherpaykel.com)

PRODUCT DIMENSIONS




ISO VIEW

CAVITY DIMENSIONS

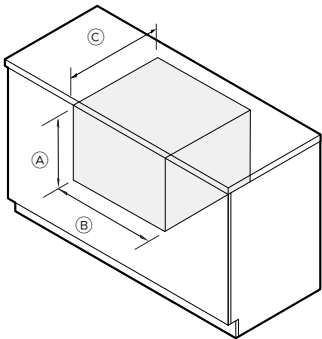


ISO VIEW

PLUMBING AND ELECTRICAL

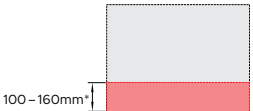

REAR VIEW

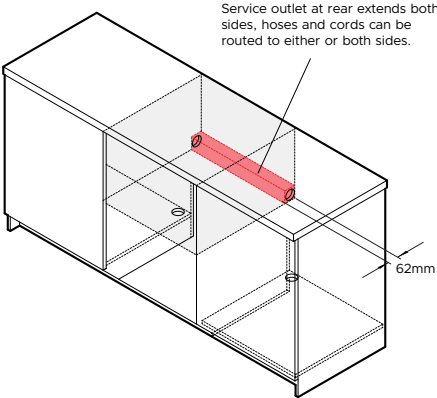

ISO VIEW

| PRODUCT DIMENSIONS |                | mm  |
|--------------------|----------------|-----|
| Ⓐ                  | Overall height | 454 |
| Ⓑ                  | Overall width  | 599 |
| Ⓒ                  | Overall depth  | 573 |

| CAVITY DIMENSIONS |               | mm      |
|-------------------|---------------|---------|
| Ⓐ                 | Cavity height | min 457 |
| Ⓑ                 | Cavity width  | min 600 |
| Ⓒ                 | Cavity depth  | min 575 |

| PRODUCT SPECIFICATIONS |                                                                        |
|------------------------|------------------------------------------------------------------------|
| WEIGHT                 | 33 kg                                                                  |
| PACKAGED WEIGHT        | 40 kg                                                                  |
| PACKAGED DIMENSIONS    | H 530 x W 654 x D 665mm                                                |
| ELECTRICAL             |                                                                        |
| Dedicated Service (A)  | 5                                                                      |
| Rated Power (W)        | 1200                                                                   |
| Supply (Hz)            | 50                                                                     |
| Voltage (V)            | 220-240                                                                |
| PLUMBING               |                                                                        |
| Supply                 | 3/4" (20mm) BSP connector water inlet hose                             |
| Pressure               | Min 0.1 Mpa (14.5psi), Max 1 Mpa (145psi) Cold water connection @ 20°C |

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://fisherpaykel.com)



DD60D4HDX2

**OVERVIEW**

The Series 9 Contemporary Double DishDrawer™ Dishwasher supports flexible dish care with independent drawers that can run separately or together. Designed for bench-height installation, it combines advanced wash technology with intuitive controls to support improved energy and water efficiency, while accommodating a wide range of dishware in contemporary kitchen designs.

**PRODUCTS**

**Series 9 Contemporary Double DishDrawer™ Dishwasher**  
DD60D4HDX2 (water softener model)

**SERIES & STYLE**


Series 9  
Contemporary Proud Handle

**FEATURES**

- 1 Independent drawers can run separately or together.
- 2 Designed for bench-height installation to support ergonomic access.
- 3 Advanced wash technology supports improved energy and water efficiency.
- 4 Each drawer fits full-size dinner plates up to 280mm in diameter.
- 5 Capacitive touch controls make everyday operation simple and intuitive.
- 6 Adaptable racking accommodates a range of dishware and cookware.
- 7 Versatile wash cycles and modifiers support varied dish care needs.
- 8 Fan-assisted drying helps leave dishes ready to use.
- 9 Contemporary stainless steel finish suits modern kitchen designs.
- 10 SmartHQ™ connectivity offers remote control and notifications through the app.


The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://fisherpaykel.com)

PRODUCT DIMENSIONS

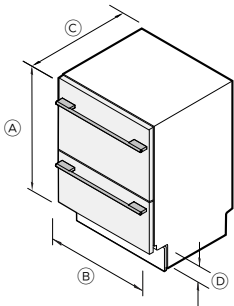


ISO VIEW

CAVITY DIMENSIONS

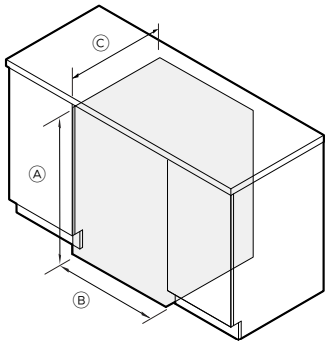

ISO VIEW

PLUMBING AND ELECTRICAL

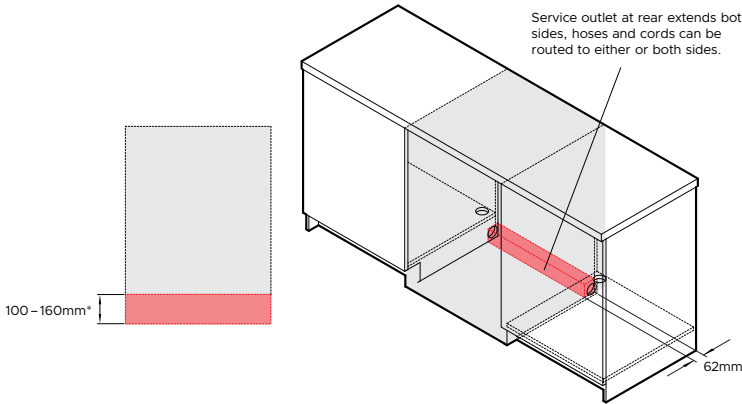

REAR VIEW

ISO VIEW

| PRODUCT DIMENSIONS |                                     | mm        |
|--------------------|-------------------------------------|-----------|
| Ⓐ                  | Overall height*                     | 820 - 880 |
| Ⓑ                  | Overall width                       | 599       |
| Ⓒ                  | Overall depth                       | 573       |
| Ⓓ                  | Height from bottom of door to floor | 101 - 161 |

\*Depending on adjustment of levelling feet.  
Black toe kick supplied; custom toe kick optional

| CAVITY DIMENSIONS |                | mm        |
|-------------------|----------------|-----------|
| Ⓐ                 | Cavity height* | 822 - 882 |
| Ⓑ                 | Cavity width   | min 600   |
| Ⓒ                 | Cavity depth   | min 580   |

\*Depending on adjustment of levelling feet.

| PRODUCT SPECIFICATIONS |                                                                        |
|------------------------|------------------------------------------------------------------------|
| WEIGHT                 | 59 kg                                                                  |
| PACKAGED WEIGHT        | 67 kg                                                                  |
| PACKAGED DIMENSIONS    | H 890 x W 654 x D 685mm                                                |
| ELECTRICAL             |                                                                        |
| Dedicated Service (A)  | 10                                                                     |
| Rated Power (W)        | 2400                                                                   |
| Supply (Hz)            | 50                                                                     |
| Voltage (V)            | 220-240                                                                |
| PLUMBING               |                                                                        |
| Supply                 | 3/4" (20mm) BSP connector water inlet hose                             |
| Pressure               | Min 0.1 Mpa (14.5psi), Max 1 Mpa (145psi) Cold water connection @ 20°C |

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://fisherpaykel.com)

